

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289579

Luminaire Tested: P3A05R40W2N902765DE010 E3DL1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289579
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R40W2N902765DE010 E3DL1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 226.0 lumens
Efficiency: N/A
Efficacy: 38.3 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289579

CATALOG NUMBER: P3A05R40W2N902765DE010 E3DL1GPH_3000K

Luminous Intensity Polar Plot

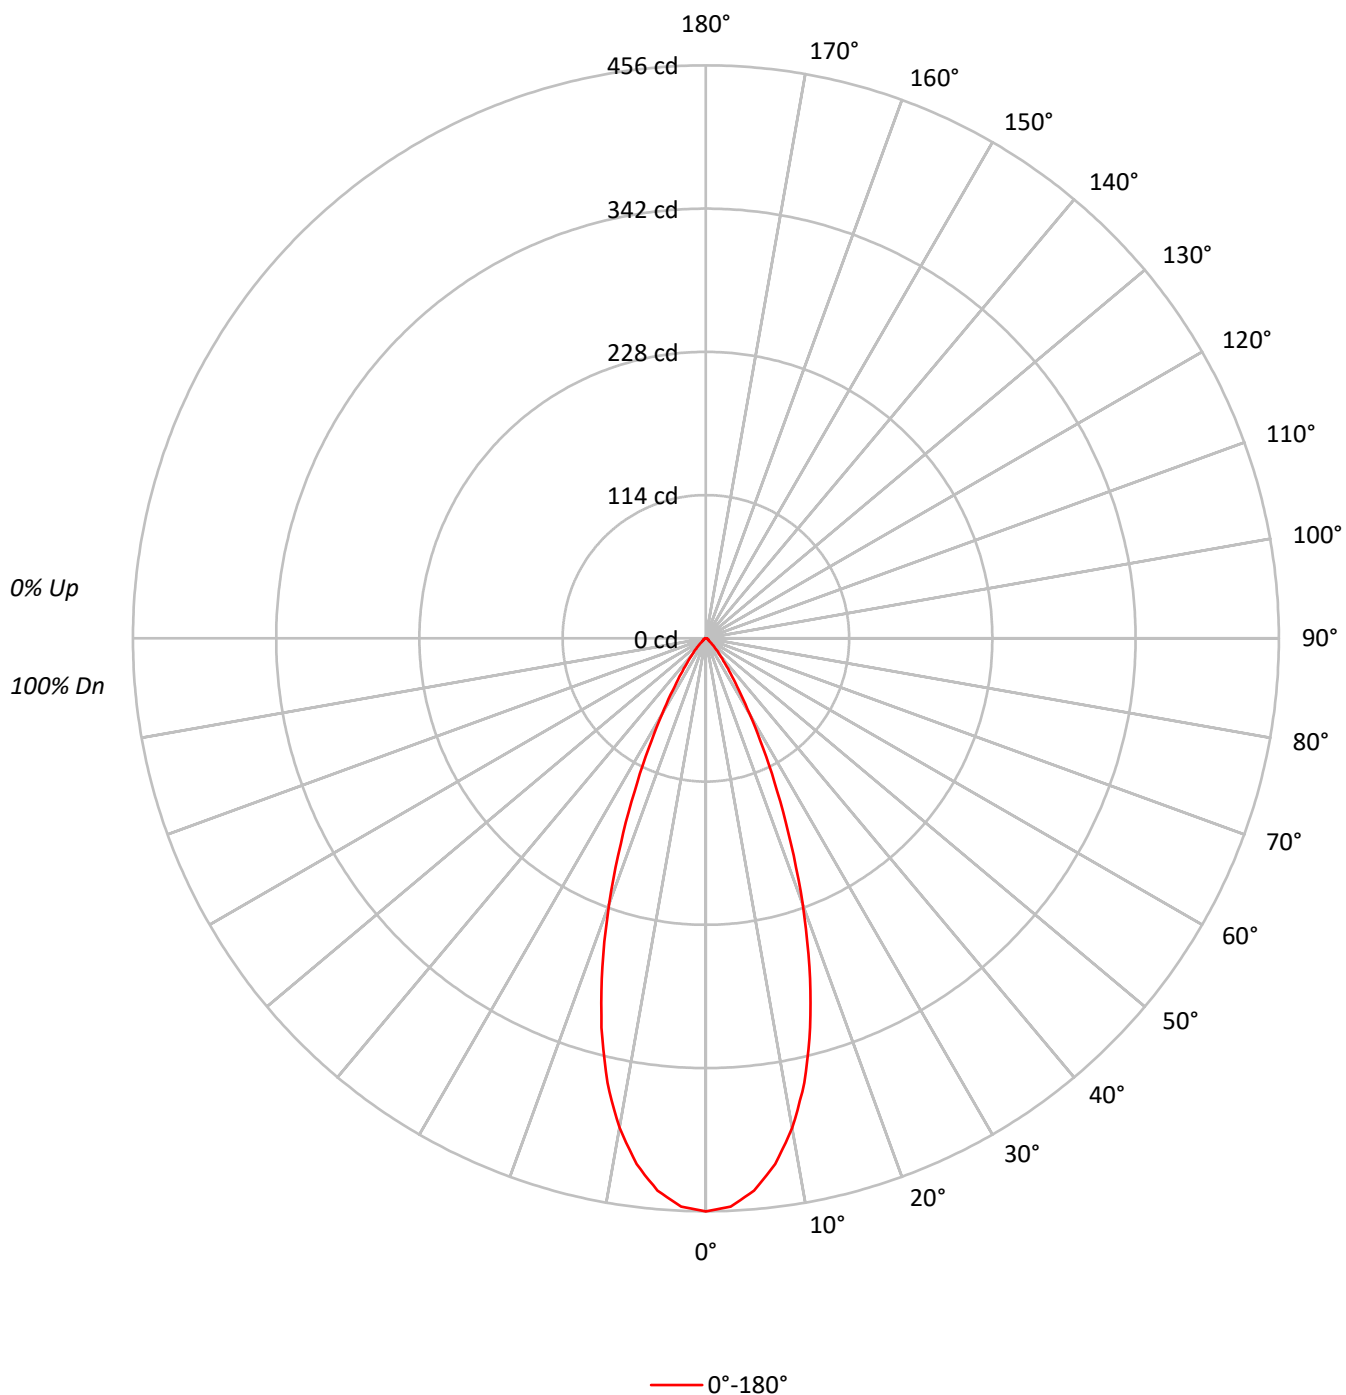



TEST NUMBER: P1289579

CATALOG NUMBER: P3A05R40W2N902765DE010 E3DL1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	114	111	109	107		112	109	107	105		105	104	102		102	100	99		98	97	96		94			
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	92	91		89			
3	104	99	94	91		102	97	93	90		95	91	88		92	89	87		90	88	86		84			
4	100	93	88	85		98	92	88	84		90	86	83		88	85	82		86	84	81		80			
5	96	88	83	79		94	87	83	79		86	82	78		84	81	78		83	80	77		76			
6	92	84	79	75		91	83	78	75		82	77	74		81	77	74		79	76	73		72			
7	88	80	75	71		87	79	74	71		78	74	71		77	73	70		76	73	70		69			
8	85	76	71	68		84	76	71	67		75	70	67		74	70	67		73	69	67		65			
9	82	73	68	64		81	73	68	64		72	67	64		71	67	64		70	66	64		63			
10	78	70	65	62		78	70	65	61		69	64	61		68	64	61		67	64	61		60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	100014
5°	97094
10°	88108
15°	72804
20°	52505
25°	32470
30°	17572
35°	9075
40°	4952
45°	2760
50°	1399
55°	1032
60°	921
65°	882
70°	898
75°	847
80°	758
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2760 cd/sqm

TEST NUMBER: P1289579

CATALOG NUMBER: P3A05R40W2N902765DE010 E3DL1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.7	18.0
10°-20°	87.3	38.6
20°-30°	62.3	27.6
30°-40°	22.9	10.2
40°-50°	7.2	3.2
50°-60°	2.5	1.1
60°-70°	1.7	0.8
70°-80°	1.1	0.5
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	190.3	84.2
0°-40°	213.2	94.3
0°-60°	222.9	98.6
0°-90°	226.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	226.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	456	
5°	441	41
15°	321	87
25°	134	62
35°	34	23
45°	9	7
55°	3	2
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1289579

CATALOG NUMBER: P3A05R40W2N902765DE010 E3DL1GPH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	456.1
2.5°	452.6
5°	441.1
7.5°	422.1
10°	395.7
12.5°	362.2
15°	320.7
17.5°	274.1
20°	225.0
22.5°	176.7
25°	134.2
27.5°	98.5
30°	69.4
32.5°	48.7
35°	33.9
37.5°	24.1
40°	17.3
42.5°	12.4
45°	8.9
47.5°	6.0
50°	4.1
52.5°	2.9
55°	2.7
57.5°	2.5
60°	2.1
62.5°	1.9
65°	1.7
67.5°	1.6
70°	1.4
72.5°	1.2
75°	1.0
77.5°	0.8
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)