

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289840

Luminaire Tested: P3A05R45W2N902765DE010 E3CD1MMS_6500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289840
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R45W2N902765DE010 E3CD1MMS_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 6500K CCT AND, 90CRI ,
E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 535.0 lumens
Efficiency: N/A
Efficacy: 90.7 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289840
CATALOG NUMBER: P3A05R45W2N902765DE010 E3CD1MMS_6500K

Luminous Intensity Polar Plot

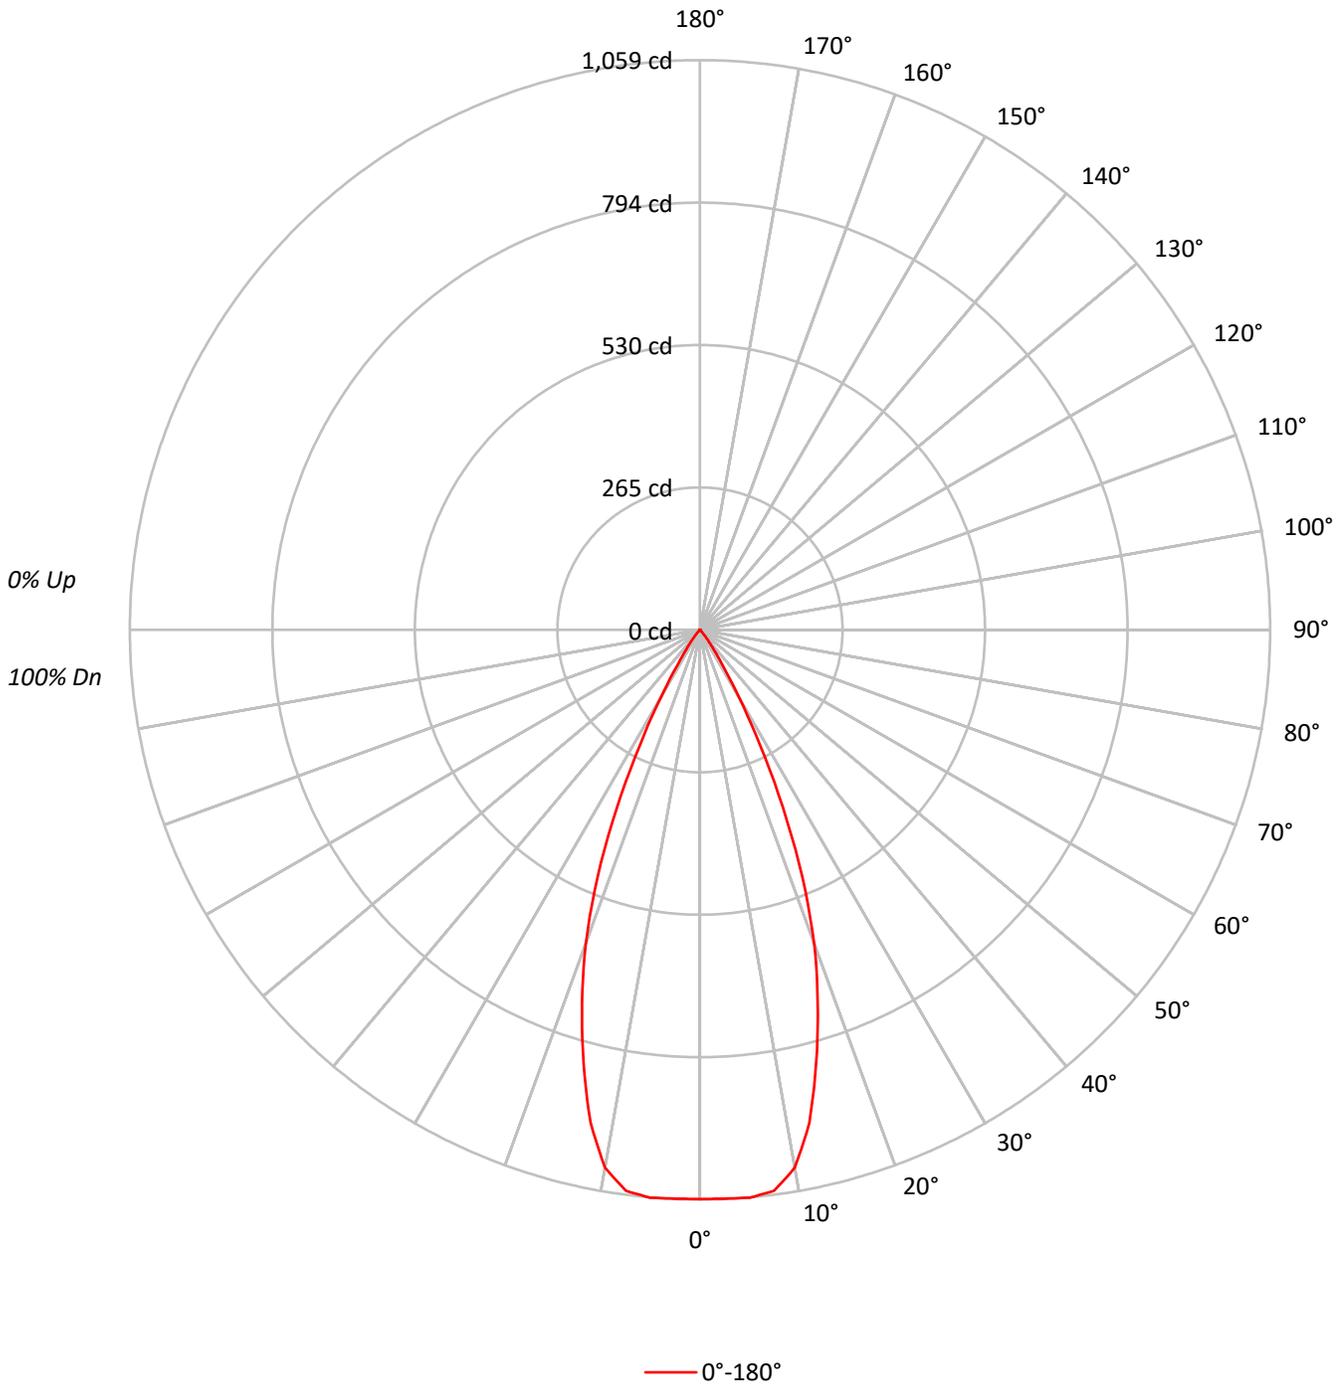



TEST NUMBER: P1289840

CATALOG NUMBER: P3A05R45W2N902765DE010 E3CD1MMS_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	96	93	91	94	91	89	92	90	88	86	86	86	86
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	88	86	84	82	82	82	82
5	98	91	86	82	96	90	85	82	88	84	81	87	83	81	85	82	80	79	79	79	79
6	94	87	82	78	93	86	81	78	85	80	77	83	80	77	82	79	76	75	75	75	75
7	90	83	78	74	89	82	78	74	81	77	74	80	76	74	79	76	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	231955
5°	233193
10°	226026
15°	189400
20°	144796
25°	88142
30°	36664
35°	11752
40°	3664
45°	744
50°	546
55°	612
60°	526
65°	623
70°	513
75°	678
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 744 cd/sqm



TEST NUMBER: P1289840

CATALOG NUMBER: P3A05R45W2N902765DE010 E3CD1MMS_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.9	18.7
10°-20°	229.3	42.9
20°-30°	165.1	30.9
30°-40°	34.3	6.4
40°-50°	3.1	0.6
50°-60°	1.3	0.2
60°-70°	1.0	0.2
70°-80°	0.7	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	494.3	92.4
0°-40°	528.7	98.8
0°-60°	533.1	99.6
0°-90°	535.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	535.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1058	
5°	1059	100
15°	834	229
25°	364	165
35°	44	34
45°	2	3
55°	2	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1289840

CATALOG NUMBER: P3A05R45W2N902765DE010 E3CD1MMS_6500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1057.8
2.5°	1058.2
5°	1059.4
7.5°	1051.8
10°	1015.1
12.5°	938.5
15°	834.3
17.5°	727.8
20°	620.5
22.5°	497.2
25°	364.3
27.5°	240.2
30°	144.8
32.5°	81.0
35°	43.9
37.5°	24.7
40°	12.8
42.5°	5.6
45°	2.4
47.5°	1.6
50°	1.6
52.5°	1.6
55°	1.6
57.5°	1.2
60°	1.2
62.5°	1.2
65°	1.2
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.4
80°	0.4
82.5°	0.4
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)