

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1290101

Luminaire Tested: P3A05R50W2N902750DE010 E3DLP1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1290101
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R50W2N902750DE010 E3DLP1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 265.0 lumens
Efficiency: N/A
Efficacy: 44.9 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1290101

CATALOG NUMBER: P3A05R50W2N902750DE010 E3DLP1WMH_2700K

Luminous Intensity Polar Plot

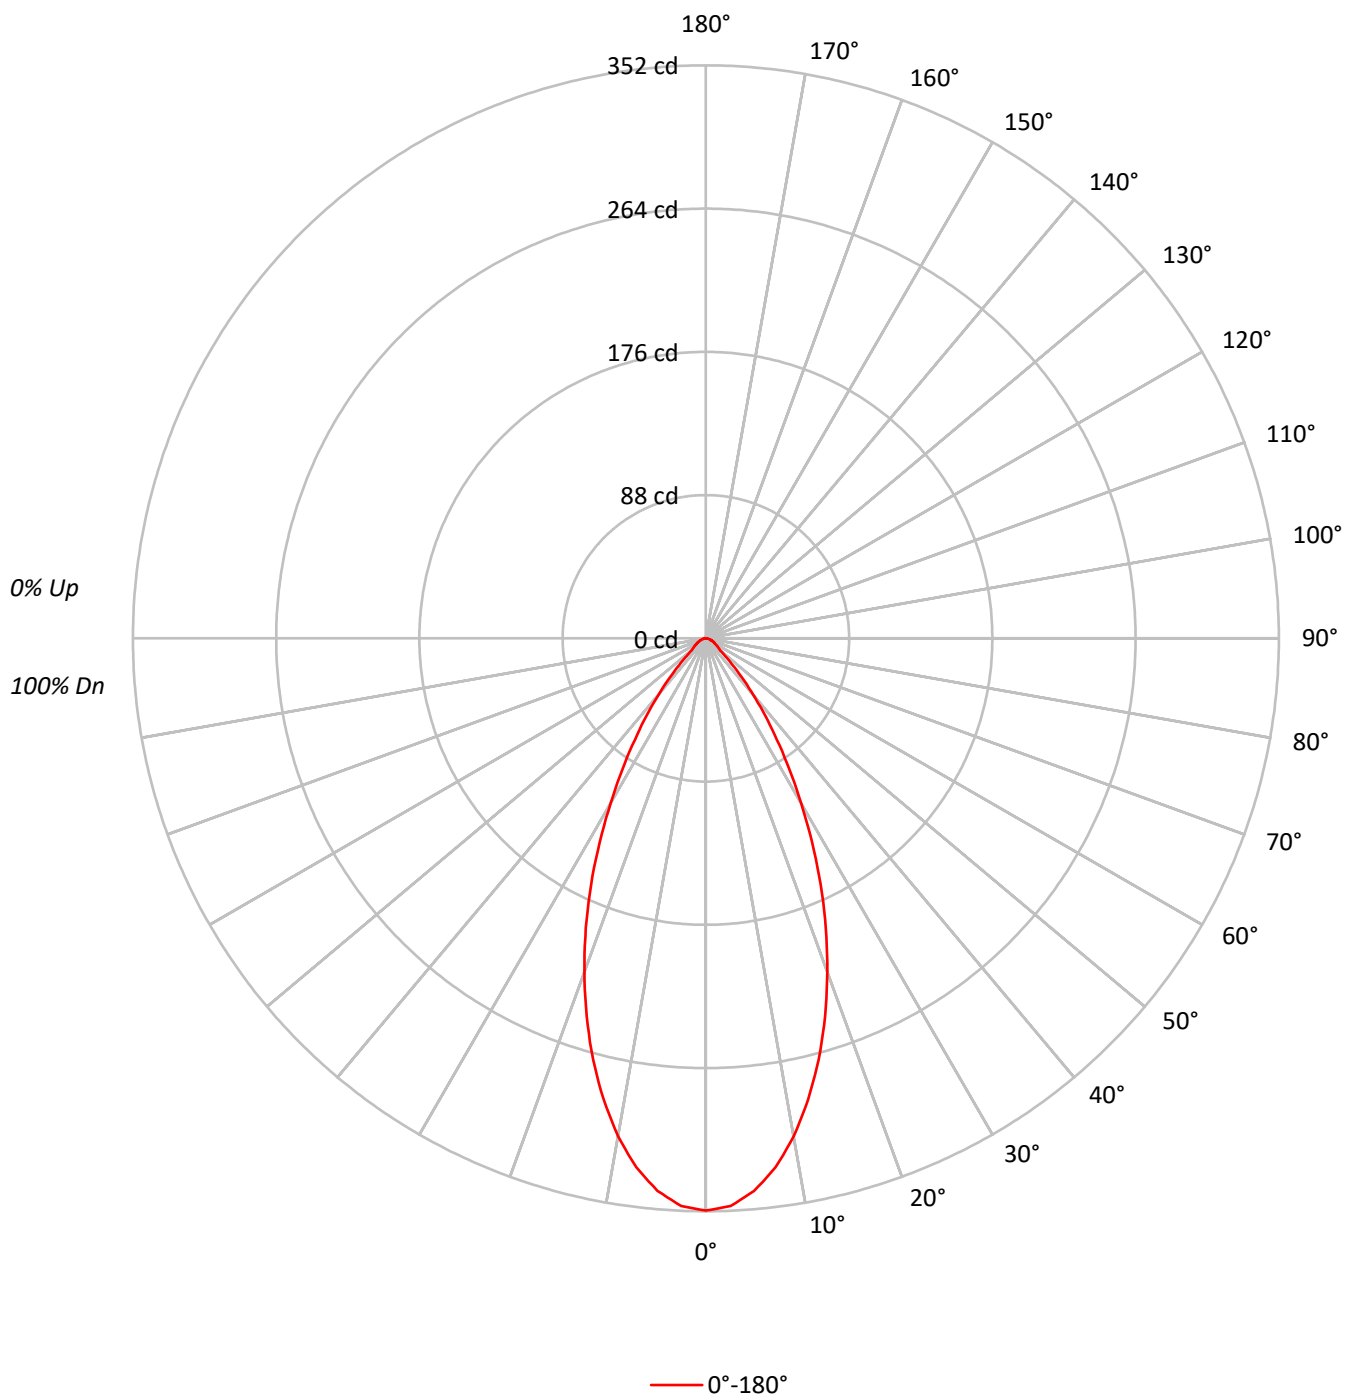

TEST NUMBER: P1290101

CATALOG NUMBER: P3A05R50W2N902750DE010 E3DLP1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		111	108	106	103		104	102	100		100	99	97		97	95	94
2	107	102	98	94		105	100	96	93		97	94	91		94	91	89		91	89	87
3	101	95	89	85		99	93	88	85		91	87	83		88	85	82		86	83	81
4	96	88	82	78		94	87	82	78		85	80	77		83	79	76		81	78	75
5	91	83	76	72		90	82	76	72		80	75	71		78	74	70		77	73	70
6	87	77	71	67		85	77	71	67		75	70	66		74	69	66		72	68	65
7	82	73	67	62		81	72	66	62		71	66	62		70	65	61		68	64	61
8	78	69	63	58		77	68	62	58		67	62	58		66	61	58		65	61	57
9	75	65	59	55		74	64	59	55		63	58	55		63	58	54		62	57	54
10	71	61	56	52		70	61	55	52		60	55	51		59	55	51		59	54	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	77077
5°	74994
10°	69159
15°	60818
20°	50894
25°	40357
30°	29599
35°	20345
40°	12939
45°	7226
50°	3923
55°	3288
60°	2851
65°	2594
70°	2308
75°	2118
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7226 cd/sqm

TEST NUMBER: P1290101

CATALOG NUMBER: P3A05R50W2N902750DE010 E3DLP1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.6	11.9
10°-20°	74.2	28.0
20°-30°	75.9	28.6
30°-40°	48.1	18.2
40°-50°	19.2	7.2
50°-60°	7.8	2.9
60°-70°	5.0	1.9
70°-80°	2.6	1.0
80°-90°	0.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	181.7	68.6
0°-40°	229.8	86.7
0°-60°	256.7	96.9
0°-90°	265.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	265.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	352	
5°	341	32
15°	268	74
25°	167	76
35°	76	48
45°	23	19
55°	9	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1290101

CATALOG NUMBER: P3A05R50W2N902750DE010 E3DLP1WMH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	351.5
2.5°	349.0
5°	340.7
7.5°	327.8
10°	310.6
12.5°	290.2
15°	267.9
17.5°	243.5
20°	218.1
22.5°	192.6
25°	166.8
27.5°	141.0
30°	116.9
32.5°	95.4
35°	76.0
37.5°	59.5
40°	45.2
42.5°	33.4
45°	23.3
47.5°	15.8
50°	11.5
52.5°	9.7
55°	8.6
57.5°	7.5
60°	6.5
62.5°	5.7
65°	5.0
67.5°	4.3
70°	3.6
72.5°	2.9
75°	2.5
77.5°	1.8
80°	1.4
82.5°	1.1
85°	0.7
87.5°	0.4
90°	0.0

(END OF REPORT)