

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1290550

Luminaire Tested: P3A05R55W2N902765DE010 E3DLD1MW\_6500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1290550  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A05R55W2N902765DE010 E3DLD1MW\_6500K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 6500K CCT AND, 90CRI ,  
E3DLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 338.1 lumens  
Efficiency: N/A  
Efficacy: 57.3 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1290550  
CATALOG NUMBER: P3A05R55W2N902765DE010 E3DLD1MW\_6500K

### Luminous Intensity Polar Plot

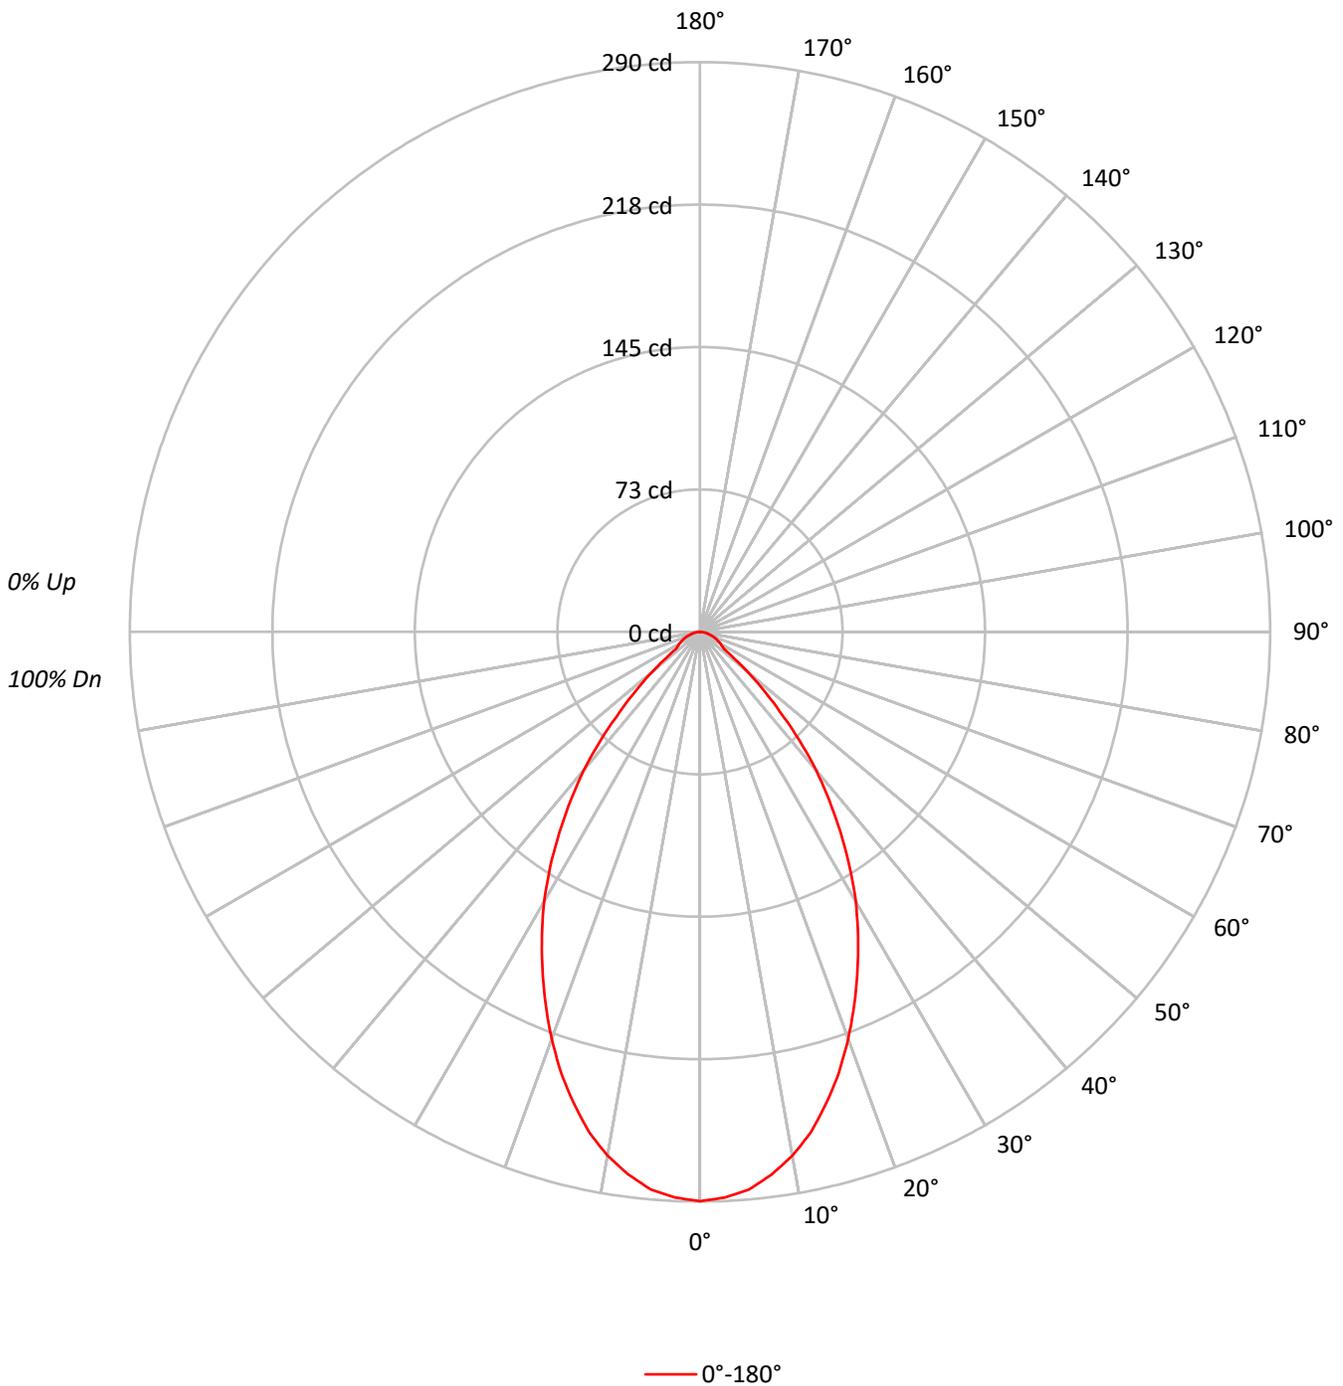





TEST NUMBER: P1290550

CATALOG NUMBER: P3A05R55W2N902765DE010 E3DLD1MW\_6500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	26.7	7.9
10°-20°	69.4	20.5
20°-30°	86.9	25.7
30°-40°	77.6	22.9
40°-50°	45.4	13.4
50°-60°	15.7	4.6
60°-70°	9.5	2.8
70°-80°	5.3	1.6
80°-90°	1.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	183.0	54.1
0°-40°	260.6	77.1
0°-60°	321.8	95.2
0°-90°	338.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	338.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	290	
5°	285	27
15°	248	69
25°	190	87
35°	125	78
45°	58	45
55°	15	16
65°	10	9
75°	5	5
85°	1	2
90°	0	



TEST NUMBER: P1290550  
CATALOG NUMBER: P3A05R55W2N902765DE010 E3DLD1MW\_6500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	289.8
2.5°	288.2
5°	285.0
7.5°	278.6
10°	270.7
12.5°	260.7
15°	248.3
17.5°	235.1
20°	220.4
22.5°	205.2
25°	189.6
27.5°	174.1
30°	158.5
32.5°	141.7
35°	124.6
37.5°	107.8
40°	91.8
42.5°	74.7
45°	57.5
47.5°	43.9
50°	31.9
52.5°	20.8
55°	14.8
57.5°	13.2
60°	12.0
62.5°	10.8
65°	9.6
67.5°	8.4
70°	7.2
72.5°	6.0
75°	4.8
77.5°	4.0
80°	3.2
82.5°	2.0
85°	1.2
87.5°	0.8
90°	0.0

(END OF REPORT)