

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291028

Luminaire Tested: P3A05R65W2N902750DE010 E3DLD1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291028
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R65W2N902750DE010 E3DLD1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 2700K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 282.0 lumens
Efficiency: N/A
Efficacy: 47.8 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291028

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLD1WMH_2700K

Luminous Intensity Polar Plot

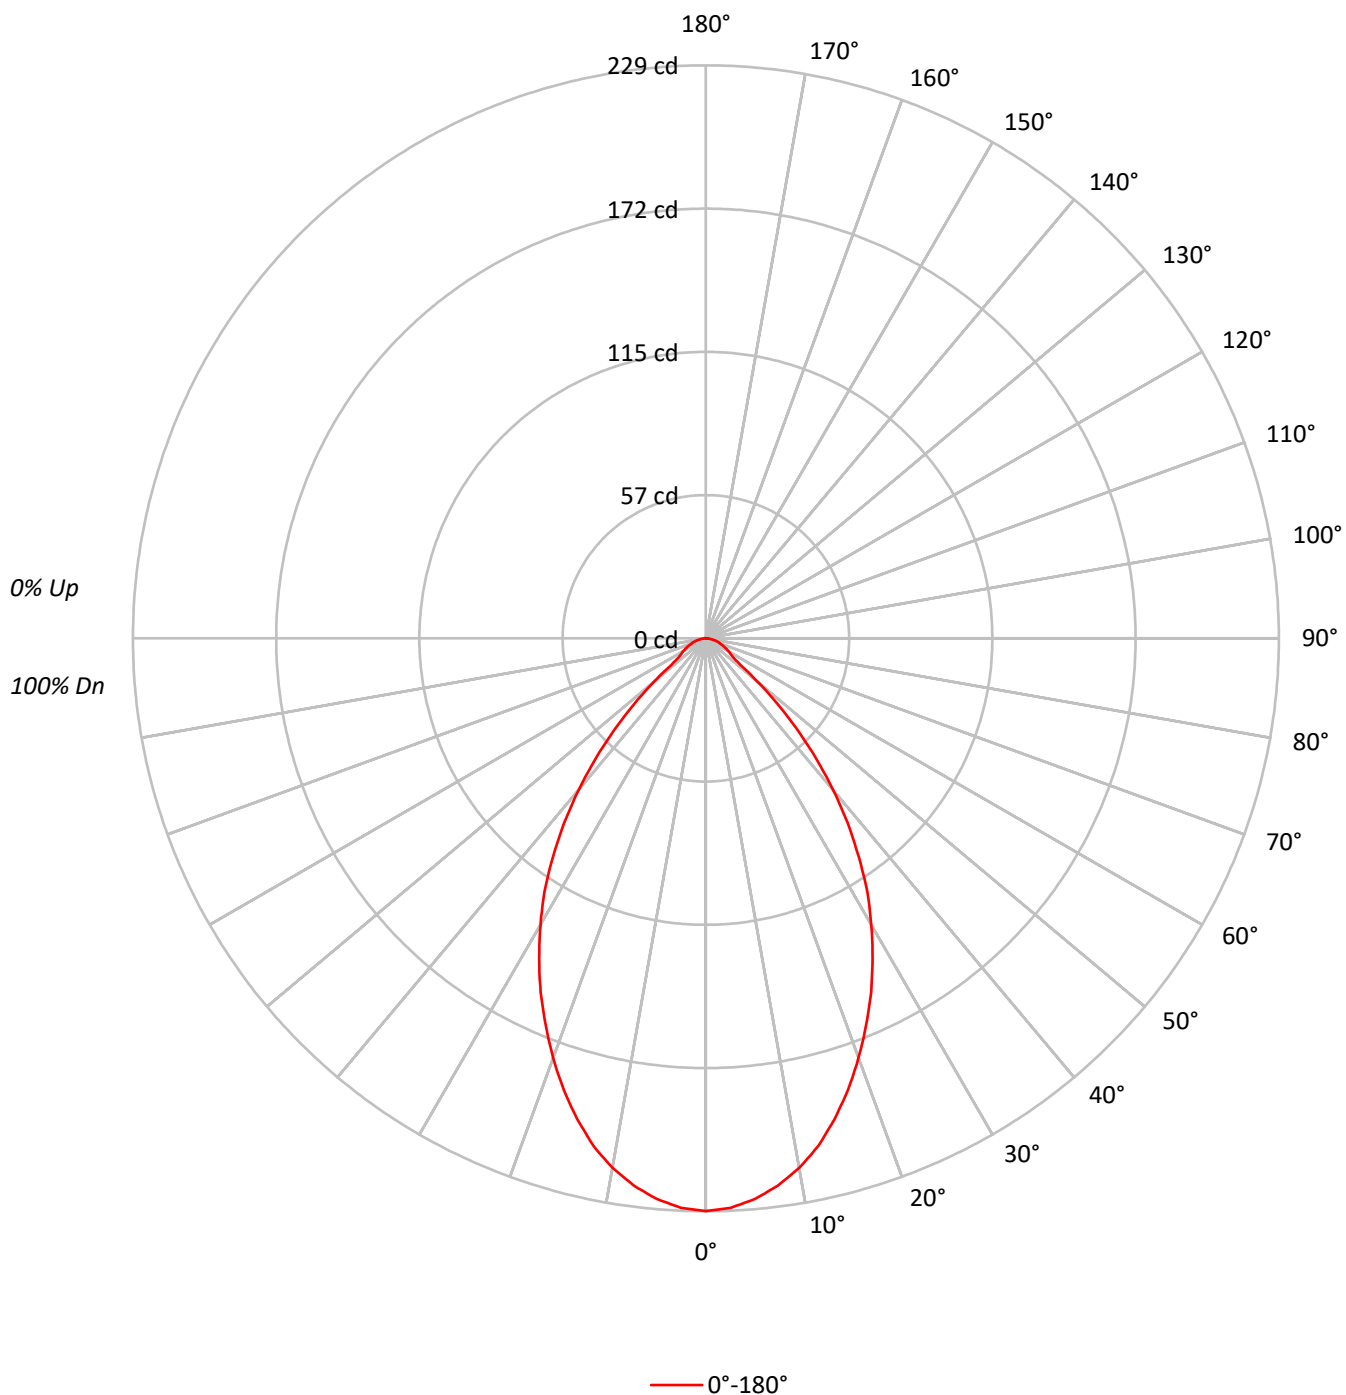

TEST NUMBER: P1291028

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLD1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91		
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82		
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74		
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67		
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61		
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56		
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51		
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47		
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44		
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50193
5°	49505
10°	47850
15°	45131
20°	41630
25°	37793
30°	33474
35°	28482
40°	22642
45°	16002
50°	9279
55°	5085
60°	4693
65°	4255
70°	3911
75°	3643
80°	3157
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 16002 cd/sqm

TEST NUMBER: P1291028

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLD1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	21.2	7.5
10°-20°	55.6	19.7
20°-30°	71.5	25.3
30°-40°	66.1	23.4
40°-50°	39.9	14.1
50°-60°	13.6	4.8
60°-70°	8.2	2.9
70°-80°	4.6	1.6
80°-90°	1.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	148.2	52.6
0°-40°	214.4	76.0
0°-60°	267.9	95.0
0°-90°	282.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	282.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	229	
5°	225	21
15°	199	56
25°	156	71
35°	106	66
45°	52	40
55°	13	14
65°	8	8
75°	4	5
85°	1	1
90°	0	

TEST NUMBER: P1291028

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLD1WMH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	228.9
2.5°	227.8
5°	224.9
7.5°	220.6
10°	214.9
12.5°	207.7
15°	198.8
17.5°	189.1
20°	178.4
22.5°	167.3
25°	156.2
27.5°	144.3
30°	132.2
32.5°	120.0
35°	106.4
37.5°	93.1
40°	79.1
42.5°	65.2
45°	51.6
47.5°	39.0
50°	27.2
52.5°	17.2
55°	13.3
57.5°	11.8
60°	10.7
62.5°	9.3
65°	8.2
67.5°	7.2
70°	6.1
72.5°	5.4
75°	4.3
77.5°	3.6
80°	2.5
82.5°	1.8
85°	1.1
87.5°	0.7
90°	0.0

(END OF REPORT)