

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291034

Luminaire Tested: P3A05R65W2N902750DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291034
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R65W2N902750DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 134.0 lumens
Efficiency: N/A
Efficacy: 22.7 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291034

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

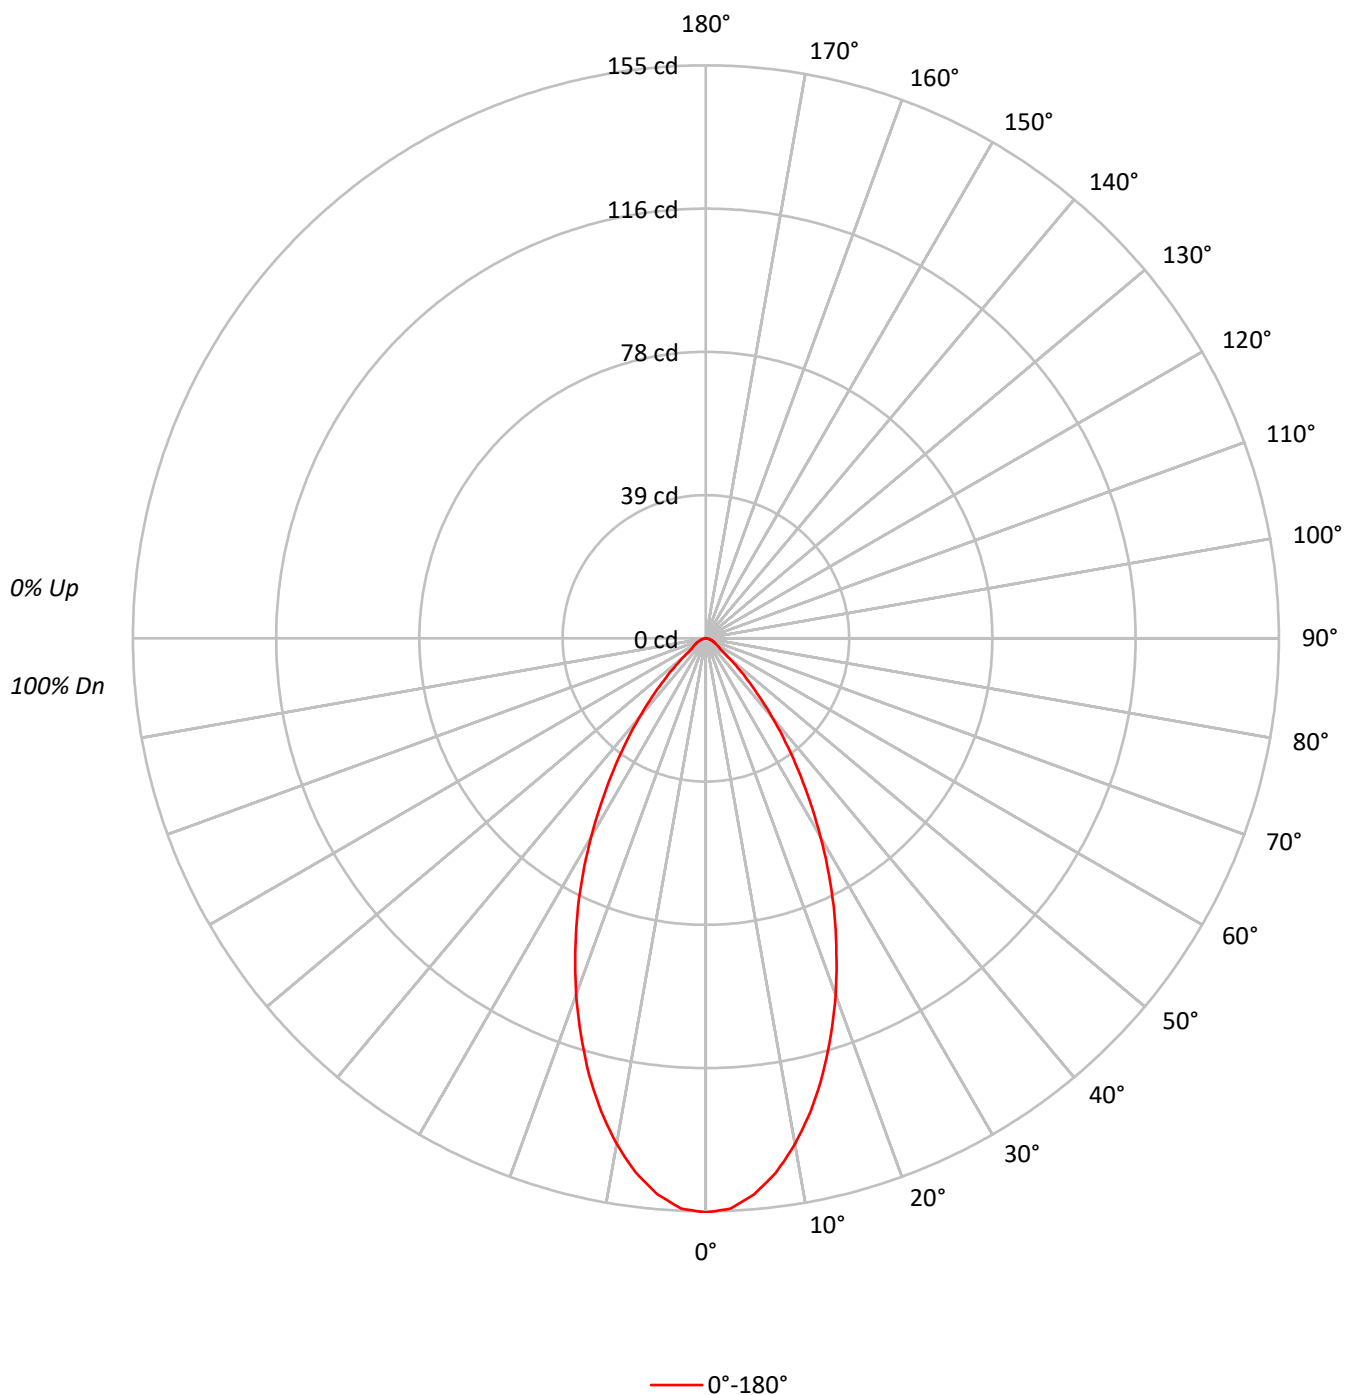



TEST NUMBER: P1291034

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLP1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	113	110	107	105		110	108	105	103		104	102	100		100	98	97		96	95	94		92			
2	107	101	97	93		104	100	96	92		96	93	90		93	91	88		90	88	86		85			
3	101	94	88	84		99	92	87	83		90	85	82		87	84	81		85	82	79		78			
4	95	87	81	76		93	86	80	76		84	79	75		82	78	74		80	76	73		72			
5	90	81	75	70		88	80	74	70		78	73	69		77	72	69		75	71	68		66			
6	85	76	69	65		84	75	69	65		73	68	64		72	67	64		71	66	63		62			
7	81	71	65	60		79	70	64	60		69	64	60		68	63	59		67	62	59		57			
8	77	67	60	56		75	66	60	56		65	59	56		64	59	55		63	58	55		54			
9	73	63	57	52		72	62	56	52		61	56	52		60	55	52		59	55	52		50			
10	69	59	53	49		68	59	53	49		58	53	49		57	52	49		56	52	49		47			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34054
5°	33216
10°	30928
15°	27719
20°	23942
25°	19912
30°	15699
35°	11645
40°	8015
45°	4962
50°	2695
55°	1682
60°	1447
65°	1297
70°	1090
75°	1017
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4962 cd/sqm

TEST NUMBER: P1291034

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	14.0	10.5
10°-20°	33.9	25.3
20°-30°	37.5	28.0
30°-40°	27.3	20.4
40°-50°	12.8	9.5
50°-60°	4.3	3.2
60°-70°	2.5	1.8
70°-80°	1.3	1.0
80°-90°	0.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	85.5	63.8
0°-40°	112.7	84.1
0°-60°	129.8	96.9
0°-90°	134.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	134.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	155	
5°	151	14
15°	122	34
25°	82	38
35°	44	27
45°	16	13
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1291034

CATALOG NUMBER: P3A05R65W2N902750DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	155.3
2.5°	154.4
5°	150.9
7.5°	145.7
10°	138.9
12.5°	131.0
15°	122.1
17.5°	112.4
20°	102.6
22.5°	92.3
25°	82.3
27.5°	72.1
30°	62.0
32.5°	52.4
35°	43.5
37.5°	35.4
40°	28.0
42.5°	21.4
45°	16.0
47.5°	11.6
50°	7.9
52.5°	5.4
55°	4.4
57.5°	3.9
60°	3.3
62.5°	2.9
65°	2.5
67.5°	2.1
70°	1.7
72.5°	1.5
75°	1.2
77.5°	1.0
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)