

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291147

Luminaire Tested: P3A05R65W2N902765DE010 E3DL1MW\_2700K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1291147  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A05R65W2N902765DE010 E3DL1MW\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 2700K CCT AND, 90CRI ,  
E3DL1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 360.0 lumens  
Efficiency: N/A  
Efficacy: 61.0 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1291147

CATALOG NUMBER: P3A05R65W2N902765DE010 E3DL1MW\_2700K

### Luminous Intensity Polar Plot

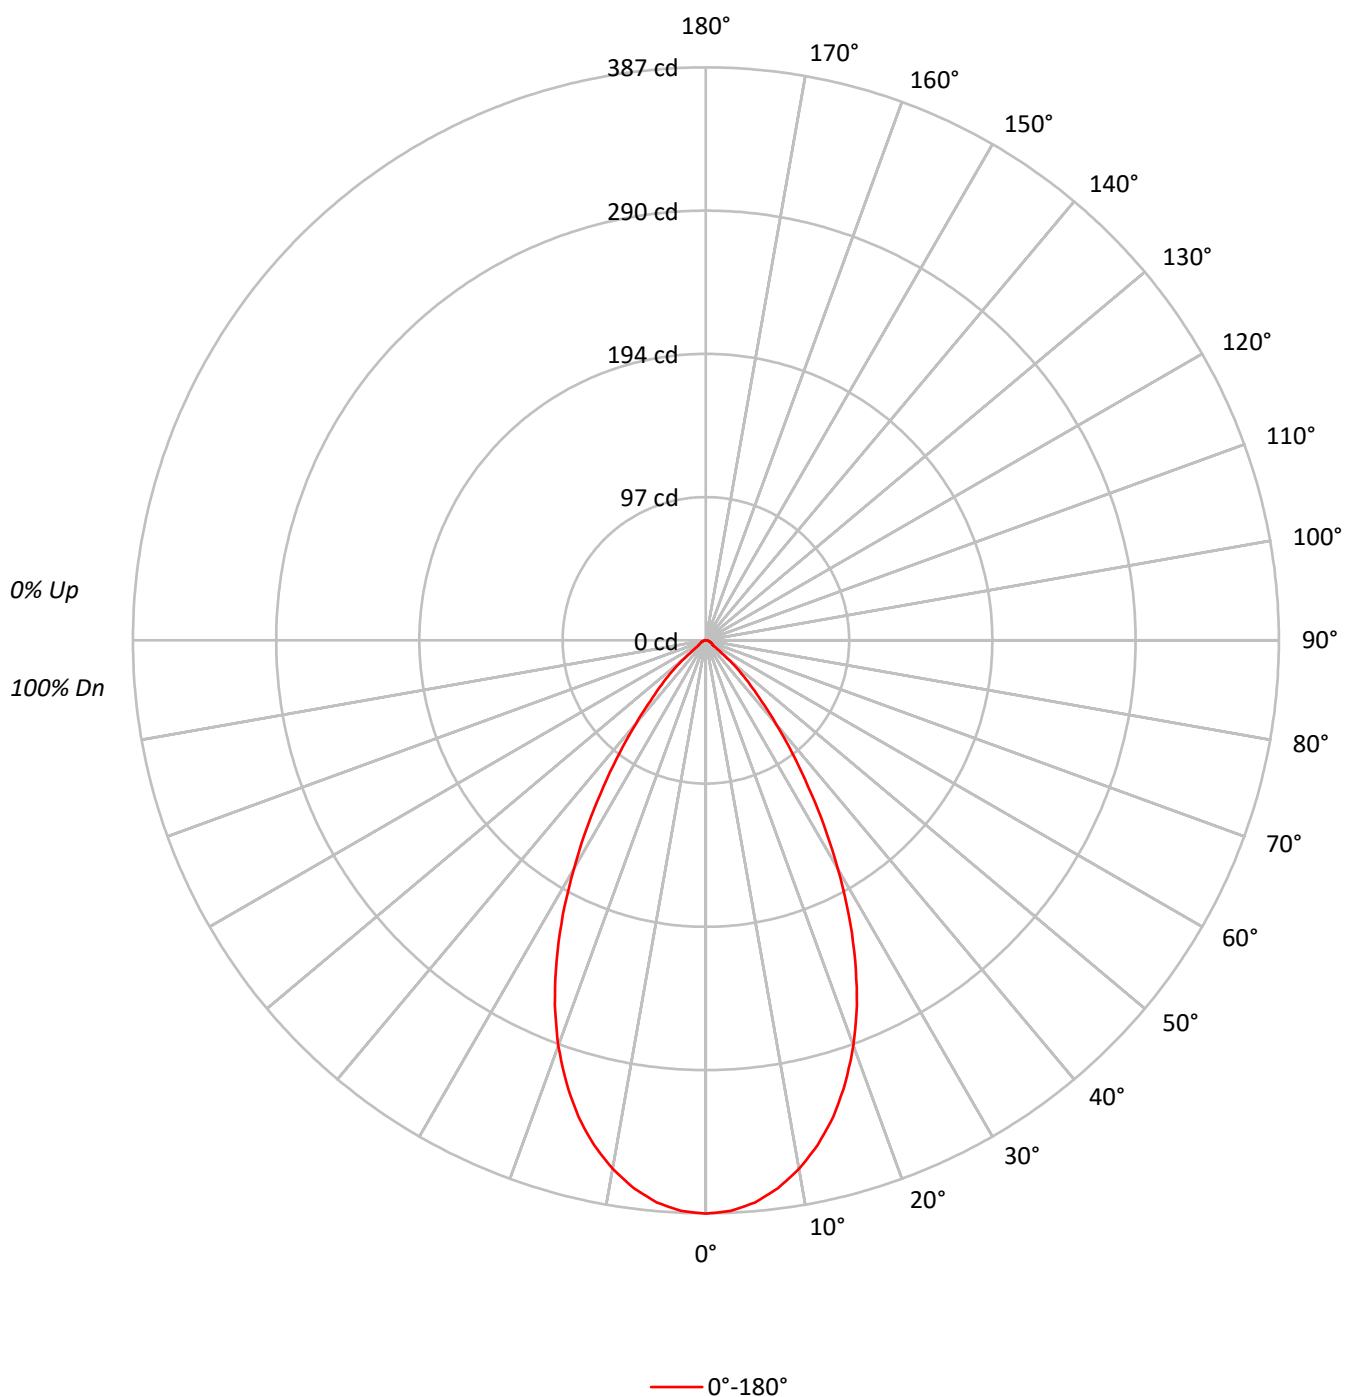

TEST NUMBER: P1291147

CATALOG NUMBER: P3A05R65W2N902765DE010 E3DL1MW\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 |  | 100 | 99  | 97  |  | 97  | 96  | 94  | 93  |
| 2   | 107 | 102 | 98  | 94  | 105 | 100 | 96  | 93  | 97  | 94  | 91  |  | 94  | 91  | 89  |  | 91  | 89  | 87  | 85  |
| 3   | 101 | 95  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  |  | 88  | 85  | 82  |  | 86  | 83  | 80  | 79  |
| 4   | 96  | 88  | 82  | 78  | 94  | 87  | 81  | 77  | 85  | 80  | 76  |  | 83  | 79  | 75  |  | 81  | 77  | 74  | 73  |
| 5   | 91  | 82  | 76  | 71  | 89  | 81  | 75  | 71  | 79  | 74  | 70  |  | 77  | 73  | 70  |  | 76  | 72  | 69  | 68  |
| 6   | 86  | 77  | 70  | 66  | 84  | 76  | 70  | 66  | 74  | 69  | 65  |  | 73  | 68  | 65  |  | 72  | 67  | 64  | 63  |
| 7   | 82  | 72  | 66  | 61  | 80  | 71  | 65  | 61  | 70  | 64  | 61  |  | 69  | 64  | 60  |  | 67  | 63  | 60  | 58  |
| 8   | 77  | 67  | 61  | 57  | 76  | 67  | 61  | 57  | 66  | 60  | 57  |  | 65  | 60  | 56  |  | 64  | 59  | 56  | 55  |
| 9   | 74  | 64  | 57  | 53  | 72  | 63  | 57  | 53  | 62  | 57  | 53  |  | 61  | 56  | 53  |  | 60  | 56  | 53  | 51  |
| 10  | 70  | 60  | 54  | 50  | 69  | 59  | 54  | 50  | 59  | 53  | 50  |  | 58  | 53  | 50  |  | 57  | 53  | 49  | 48  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 84905 |
| 5°  | 83887 |
| 10° | 80693 |
| 15° | 75596 |
| 20° | 67999 |
| 25° | 57729 |
| 30° | 45146 |
| 35° | 32177 |
| 40° | 21068 |
| 45° | 13025 |
| 50° | 6618  |
| 55° | 2332  |
| 60° | 2061  |
| 65° | 2024  |
| 70° | 1859  |
| 75° | 1864  |
| 80° | 1768  |
| 85° | 1761  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 13025 cd/sqm

TEST NUMBER: P1291147

CATALOG NUMBER: P3A05R65W2N902765DE010 E3DL1MW\_2700K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 35.8   | 9.9       |
| 10°-20°   | 92.7   | 25.7      |
| 20°-30°   | 108.3  | 30.1      |
| 30°-40°   | 75.7   | 21.0      |
| 40°-50°   | 33.3   | 9.3       |
| 50°-60°   | 7.4    | 2.1       |
| 60°-70°   | 3.8    | 1.0       |
| 70°-80°   | 2.3    | 0.6       |
| 80°-90°   | 0.8    | 0.2       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 236.8  | 65.8      |
| 0°-40°    | 312.4  | 86.8      |
| 0°-60°    | 353.2  | 98.1      |
| 0°-90°    | 360.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 360.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 387 |      |
| 5°  | 381 | 36   |
| 15° | 333 | 93   |
| 25° | 239 | 108  |
| 35° | 120 | 76   |
| 45° | 42  | 33   |
| 55° | 6   | 7    |
| 65° | 4   | 4    |
| 75° | 2   | 2    |
| 85° | 1   | 1    |
| 90° | 0   |      |

TEST NUMBER: P1291147

CATALOG NUMBER: P3A05R65W2N902765DE010 E3DL1MW\_2700K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 387.2 |
| 2.5°  | 385.7 |
| 5°    | 381.1 |
| 7.5°  | 373.2 |
| 10°   | 362.4 |
| 12.5° | 349.1 |
| 15°   | 333.0 |
| 17.5° | 313.3 |
| 20°   | 291.4 |
| 22.5° | 266.6 |
| 25°   | 238.6 |
| 27.5° | 209.2 |
| 30°   | 178.3 |
| 32.5° | 148.6 |
| 35°   | 120.2 |
| 37.5° | 95.4  |
| 40°   | 73.6  |
| 42.5° | 55.6  |
| 45°   | 42.0  |
| 47.5° | 30.9  |
| 50°   | 19.4  |
| 52.5° | 10.0  |
| 55°   | 6.1   |
| 57.5° | 5.4   |
| 60°   | 4.7   |
| 62.5° | 4.3   |
| 65°   | 3.9   |
| 67.5° | 3.2   |
| 70°   | 2.9   |
| 72.5° | 2.5   |
| 75°   | 2.2   |
| 77.5° | 1.8   |
| 80°   | 1.4   |
| 82.5° | 1.1   |
| 85°   | 0.7   |
| 87.5° | 0.4   |
| 90°   | 0.0   |

(END OF REPORT)