

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291468

Luminaire Tested: P3A05R70W2N902765DE010 E3DLP1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291468
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A05R70W2N902765DE010 E3DLP1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 5000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 141.0 lumens
Efficiency: N/A
Efficacy: 23.9 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291468

CATALOG NUMBER: P3A05R70W2N902765DE010 E3DLP1GPH_5000K

Luminous Intensity Polar Plot

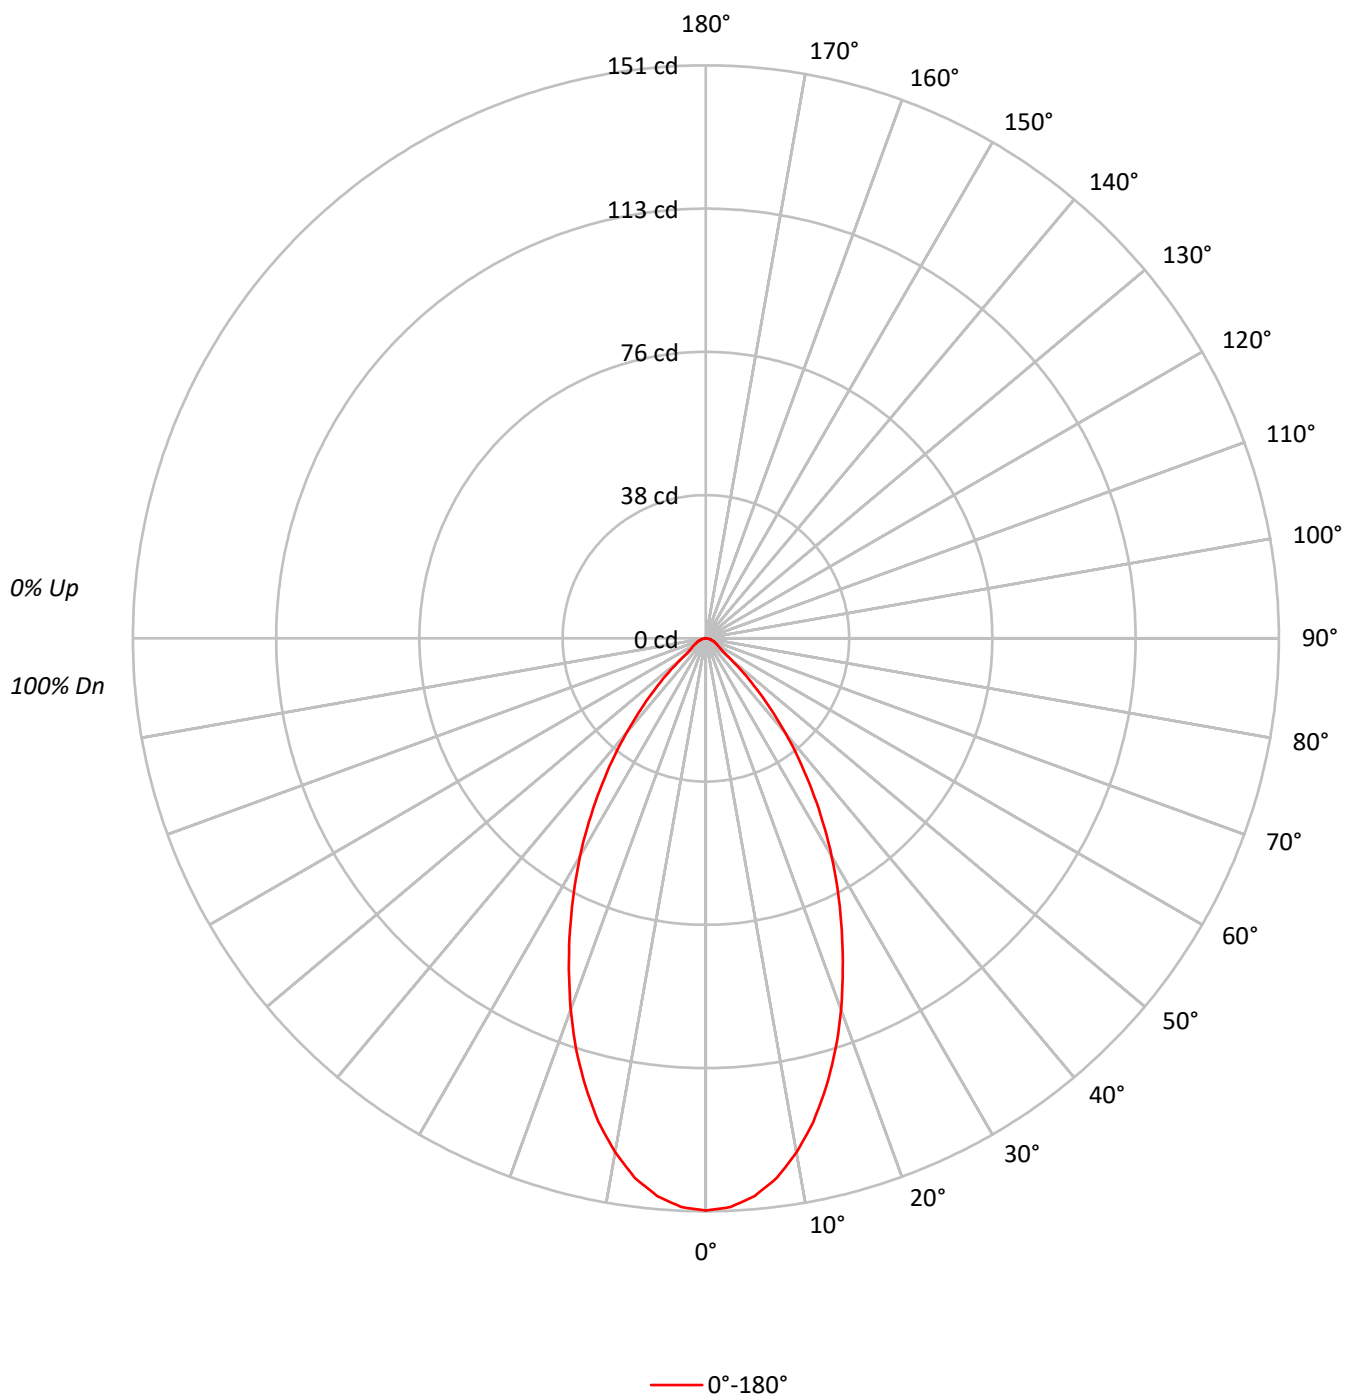

TEST NUMBER: P1291468

CATALOG NUMBER: P3A05R70W2N902765DE010 E3DLP1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	104		110	107	105	103		103	101	100		100	98	97		96	95	94
2	106	101	97	93		104	99	95	92		96	93	90		93	90	88		90	88	86
3	100	93	88	83		98	92	87	83		89	85	81		87	83	80		84	81	79
4	95	86	80	76		93	85	80	75		83	78	74		81	77	73		79	76	73
5	89	80	74	69		88	79	73	69		78	72	68		76	71	68		74	70	67
6	85	75	68	64		83	74	68	64		73	67	63		71	66	63		70	65	62
7	80	70	64	59		79	69	63	59		68	62	58		67	62	58		66	61	58
8	76	66	59	55		75	65	59	55		64	58	54		63	58	54		62	57	54
9	72	62	55	51		71	61	55	51		60	55	51		59	54	51		58	54	50
10	69	58	52	48		67	58	52	48		57	51	48		56	51	47		55	51	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	33068
5°	32467
10°	30616
15°	27787
20°	24292
25°	20493
30°	16787
35°	13010
40°	9332
45°	5892
50°	2934
55°	1797
60°	1535
65°	1401
70°	1282
75°	1186
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5892 cd/sqm

TEST NUMBER: P1291468

CATALOG NUMBER: P3A05R70W2N902765DE010 E3DLP1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	13.8	9.8
10°-20°	34.1	24.2
20°-30°	38.8	27.5
30°-40°	30.3	21.5
40°-50°	14.9	10.6
50°-60°	4.6	3.2
60°-70°	2.7	1.9
70°-80°	1.5	1.0
80°-90°	0.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	86.6	61.4
0°-40°	116.9	82.9
0°-60°	136.4	96.7
0°-90°	141.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	141.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	151	
5°	148	14
15°	122	34
25°	85	39
35°	49	30
45°	19	15
55°	5	5
65°	3	3
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1291468

CATALOG NUMBER: P3A05R70W2N902765DE010 E3DLP1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	150.8
2.5°	150.0
5°	147.5
7.5°	143.4
10°	137.5
12.5°	130.6
15°	122.4
17.5°	113.6
20°	104.1
22.5°	94.3
25°	84.7
27.5°	75.3
30°	66.3
32.5°	57.3
35°	48.6
37.5°	40.4
40°	32.6
42.5°	25.3
45°	19.0
47.5°	13.3
50°	8.6
52.5°	5.7
55°	4.7
57.5°	4.1
60°	3.5
62.5°	3.1
65°	2.7
67.5°	2.4
70°	2.0
72.5°	1.6
75°	1.4
77.5°	1.2
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)