

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291743

Luminaire Tested: P3A09R15W2N902765DE010 E3DL1GPH_6500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291743
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R15W2N902765DE010 E3DL1GPH_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 6500K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 299.0 lumens
Efficiency: N/A
Efficacy: 33.2 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291743

CATALOG NUMBER: P3A09R15W2N902765DE010 E3DL1GPH_6500K

Luminous Intensity Polar Plot

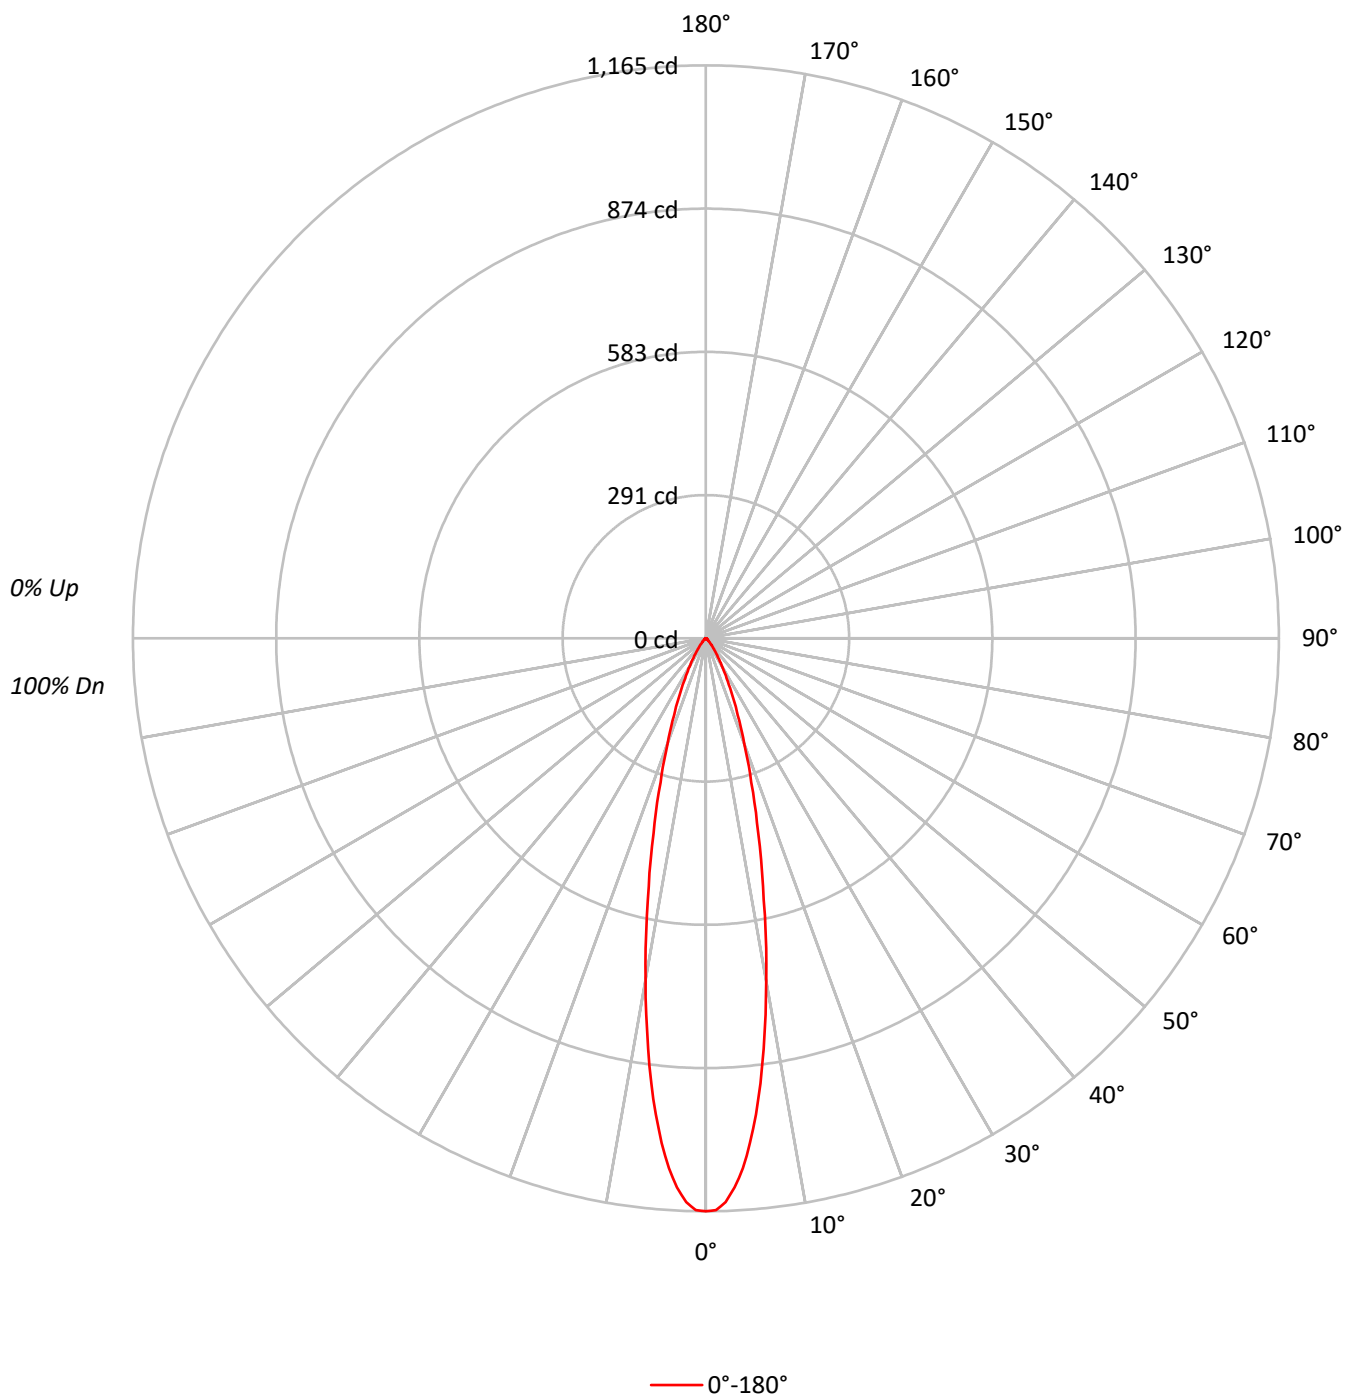

TEST NUMBER: P1291743

CATALOG NUMBER: P3A09R15W2N902765DE010 E3DL1GPH_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97		95
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96	94	93		91
3	106	101	97	93	104	99	96	93	97	94	91		94	92	90		92	90	88		87
4	102	96	92	88	100	95	91	88	93	89	87		91	88	86		89	87	85		83
5	98	92	87	84	97	91	87	83	89	85	83		88	84	82		86	83	81		80
6	95	88	83	80	94	87	83	80	86	82	79		85	81	79		83	80	78		77
7	92	85	80	77	91	84	80	76	83	79	76		82	78	76		81	78	75		74
8	89	81	77	74	88	81	77	73	80	76	73		79	75	73		78	75	73		72
9	86	79	74	71	85	78	74	71	77	73	71		77	73	70		76	73	70		69
10	84	76	71	68	83	76	71	68	75	71	68		74	71	68		74	70	68		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	255418
5°	226722
10°	157445
15°	93122
20°	53041
25°	30316
30°	16762
35°	8941
40°	4952
45°	2667
50°	1672
55°	1338
60°	1140
65°	1038
70°	898
75°	1017
80°	758
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2667 cd/sqm

TEST NUMBER: P1291743

CATALOG NUMBER: P3A09R15W2N902765DE010 E3DL1GPH_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.6	29.3
10°-20°	115.6	38.7
20°-30°	59.5	19.9
30°-40°	22.4	7.5
40°-50°	7.3	2.4
50°-60°	3.2	1.1
60°-70°	2.0	0.7
70°-80°	1.2	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	262.7	87.9
0°-40°	285.1	95.3
0°-60°	295.5	98.8
0°-90°	299.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	299.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1165	
5°	1030	88
15°	410	116
25°	125	60
35°	33	22
45°	9	7
55°	4	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1291743

CATALOG NUMBER: P3A09R15W2N902765DE010 E3DL1GPH_6500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1164.8
1°	1162.5
2°	1147.3
3°	1118.2
4°	1079.9
5°	1030.0
6°	973.6
7°	911.6
8°	842.8
9°	774.8
10°	707.1
12.5°	544.1
15°	410.2
17.5°	307.0
20°	227.3
22.5°	169.7
25°	125.3
27.5°	91.3
30°	66.2
32.5°	47.0
35°	33.4
37.5°	23.9
40°	17.3
42.5°	12.4
45°	8.6
47.5°	6.3
50°	4.9
52.5°	4.0
55°	3.5
57.5°	2.9
60°	2.6
62.5°	2.3
65°	2.0
67.5°	1.7
70°	1.4
72.5°	1.4
75°	1.2
77.5°	0.9
80°	0.6
82.5°	0.6
85°	0.3
87.5°	0.0
90°	0.0

(END OF REPORT)