

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292127

Luminaire Tested: P3A09R20W2N902765DE010 E3DLP1WH\_3000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1292127  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A09R20W2N902765DE010 E3DLP1WH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,  
E3DLP1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 603.0 lumens  
Efficiency: N/A  
Efficacy: 67.0 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292127

CATALOG NUMBER: P3A09R20W2N902765DE010 E3DLP1WH\_3000K

### Luminous Intensity Polar Plot

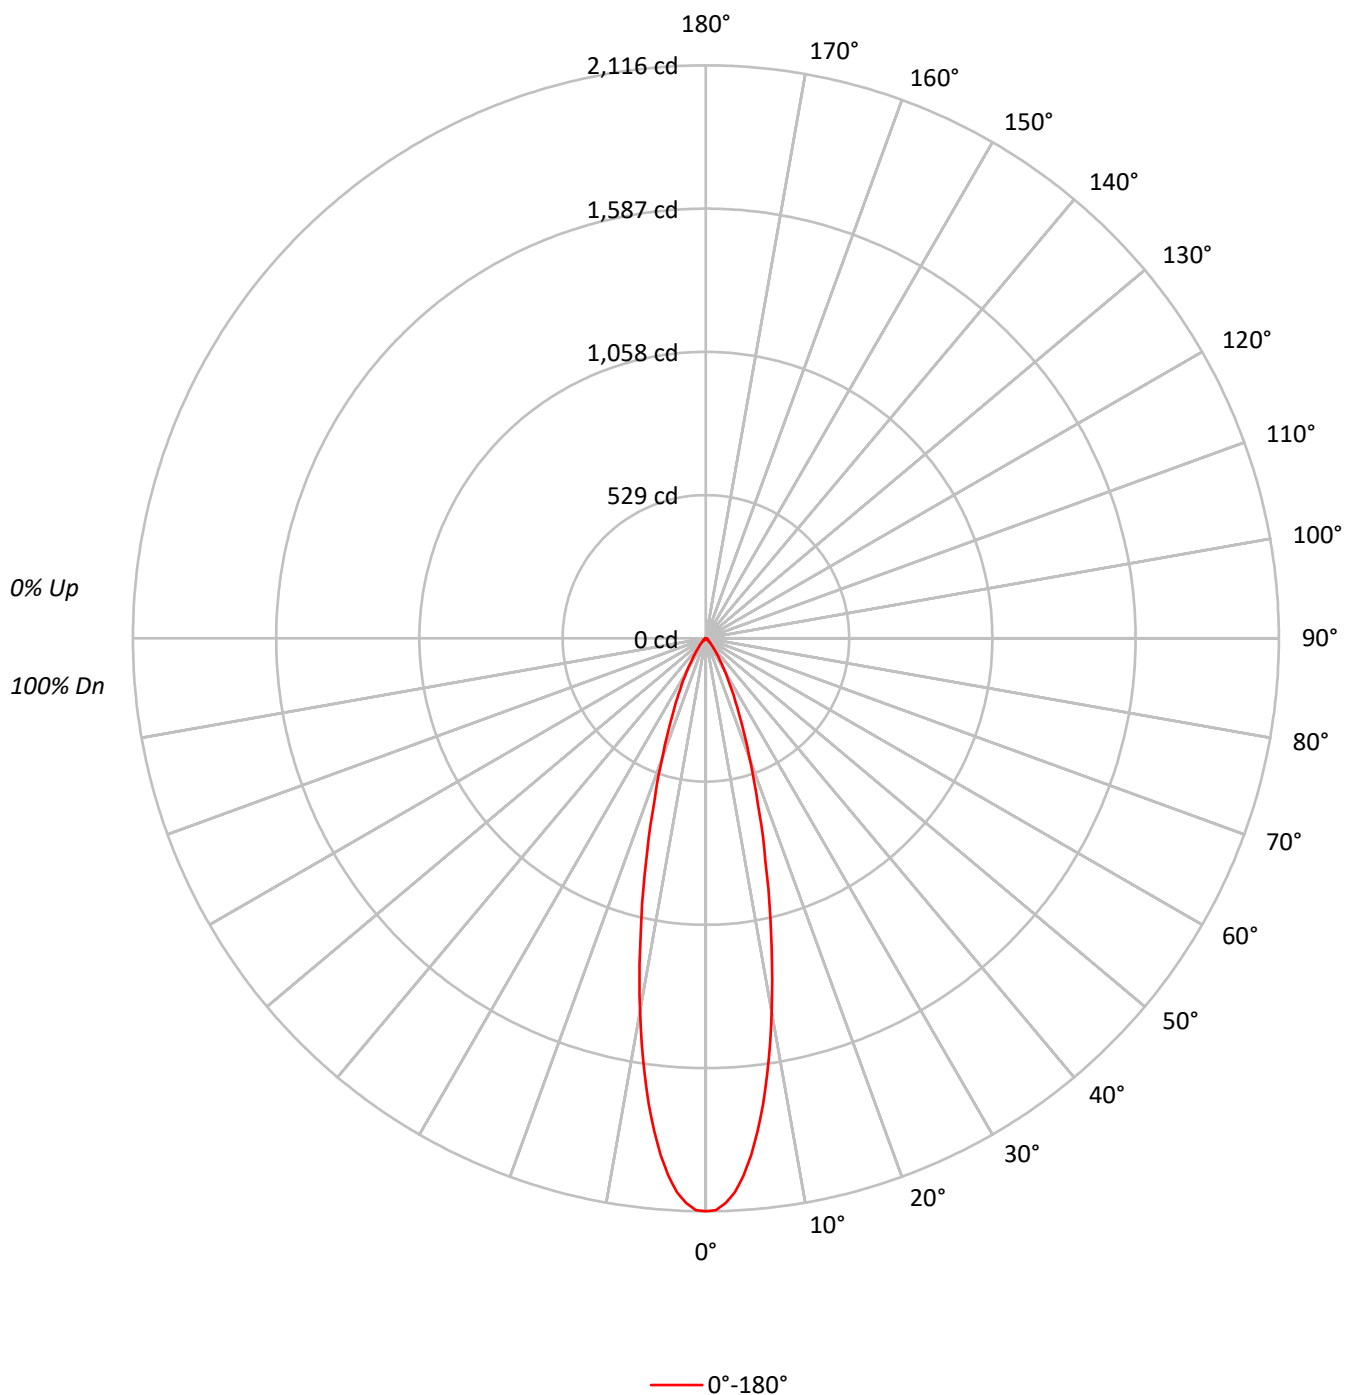

CATALOG NUMBER: P3A09R20W2N902765DE010 E3DLP1WH\_3000K

### COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |  |  |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |  |  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |  |  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |  |  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |  |  |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |  |  |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 95  |  |  |
| 2   | 110 | 106 | 102 | 100 | 108 | 104 | 101 | 98  | 101 | 98  | 96  | 98  | 96  | 94  | 95  | 94  | 92  | 91  |  |  |
| 3   | 106 | 100 | 96  | 93  | 104 | 99  | 95  | 92  | 97  | 93  | 91  | 94  | 92  | 89  | 92  | 90  | 88  | 87  |  |  |
| 4   | 102 | 96  | 91  | 88  | 100 | 95  | 90  | 87  | 92  | 89  | 86  | 91  | 88  | 85  | 89  | 86  | 84  | 83  |  |  |
| 5   | 98  | 91  | 87  | 83  | 97  | 90  | 86  | 83  | 89  | 85  | 82  | 87  | 84  | 81  | 86  | 83  | 81  | 79  |  |  |
| 6   | 95  | 87  | 83  | 79  | 93  | 87  | 82  | 79  | 85  | 81  | 78  | 84  | 81  | 78  | 83  | 80  | 77  | 76  |  |  |
| 7   | 91  | 84  | 79  | 76  | 90  | 83  | 79  | 76  | 82  | 78  | 75  | 81  | 78  | 75  | 80  | 77  | 75  | 73  |  |  |
| 8   | 88  | 81  | 76  | 73  | 87  | 80  | 76  | 73  | 79  | 75  | 72  | 78  | 75  | 72  | 78  | 74  | 72  | 71  |  |  |
| 9   | 85  | 78  | 73  | 70  | 85  | 77  | 73  | 70  | 77  | 73  | 70  | 76  | 72  | 69  | 75  | 72  | 69  | 68  |  |  |
| 10  | 83  | 75  | 71  | 68  | 82  | 75  | 70  | 67  | 74  | 70  | 67  | 73  | 70  | 67  | 73  | 69  | 67  | 66  |  |  |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°     |
|-----|--------|
| 0°  | 463932 |
| 5°  | 421725 |
| 10° | 311684 |
| 15° | 192805 |
| 20° | 110096 |
| 25° | 62858  |
| 30° | 35246  |
| 35° | 19194  |
| 40° | 10505  |
| 45° | 5768   |
| 50° | 3377   |
| 55° | 2447   |
| 60° | 2281   |
| 65° | 2127   |
| 70° | 1859   |
| 75° | 1949   |
| 80° | 1515   |
| 85° | 1510   |

**MAXIMUM LUMINANCE 45°-90°:**

Luminance: 5768 cd/sqm

TEST NUMBER: P1292127

CATALOG NUMBER: P3A09R20W2N902765DE010 E3DLP1WH\_3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 165.9  | 27.5      |
| 10°-20°   | 236.8  | 39.3      |
| 20°-30°   | 123.6  | 20.5      |
| 30°-40°   | 47.8   | 7.9       |
| 40°-50°   | 15.5   | 2.6       |
| 50°-60°   | 6.1    | 1.0       |
| 60°-70°   | 4.0    | 0.7       |
| 70°-80°   | 2.4    | 0.4       |
| 80°-90°   | 0.8    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 526.4  | 87.3      |
| 0°-40°    | 574.2  | 95.2      |
| 0°-60°    | 595.8  | 98.8      |
| 0°-90°    | 603.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 603.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2116 |      |
| 5°  | 1916 | 166  |
| 15° | 849  | 237  |
| 25° | 260  | 124  |
| 35° | 72   | 48   |
| 45° | 19   | 16   |
| 55° | 6    | 6    |
| 65° | 4    | 4    |
| 75° | 2    | 2    |
| 85° | 1    | 1    |
| 90° | 0    |      |



TEST NUMBER: P1292127

CATALOG NUMBER: P3A09R20W2N902765DE010 E3DLP1WH\_3000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 2115.7 |
| 1°    | 2111.7 |
| 2°    | 2086.6 |
| 3°    | 2048.2 |
| 4°    | 1988.7 |
| 5°    | 1915.9 |
| 6°    | 1829.7 |
| 7°    | 1734.2 |
| 8°    | 1623.5 |
| 9°    | 1515.7 |
| 10°   | 1399.8 |
| 12.5° | 1112.6 |
| 15°   | 849.3  |
| 17.5° | 635.5  |
| 20°   | 471.8  |
| 22.5° | 349.5  |
| 25°   | 259.8  |
| 27.5° | 191.7  |
| 30°   | 139.2  |
| 32.5° | 100.8  |
| 35°   | 71.7   |
| 37.5° | 51.8   |
| 40°   | 36.7   |
| 42.5° | 26.2   |
| 45°   | 18.6   |
| 47.5° | 13.4   |
| 50°   | 9.9    |
| 52.5° | 7.6    |
| 55°   | 6.4    |
| 57.5° | 5.8    |
| 60°   | 5.2    |
| 62.5° | 4.7    |
| 65°   | 4.1    |
| 67.5° | 3.5    |
| 70°   | 2.9    |
| 72.5° | 2.9    |
| 75°   | 2.3    |
| 77.5° | 1.7    |
| 80°   | 1.2    |
| 82.5° | 1.2    |
| 85°   | 0.6    |
| 87.5° | 0.6    |
| 90°   | 0.0    |

(END OF REPORT)