

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292170

Luminaire Tested: P3A09R25W2N902750DE010 E3CD1MMS_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292170
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R25W2N902750DE010 E3CD1MMS_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,
E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 673.0 lumens
Efficiency: N/A
Efficacy: 74.8 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292170

CATALOG NUMBER: P3A09R25W2N902750DE010 E3CD1MMS_2700K

Luminous Intensity Polar Plot

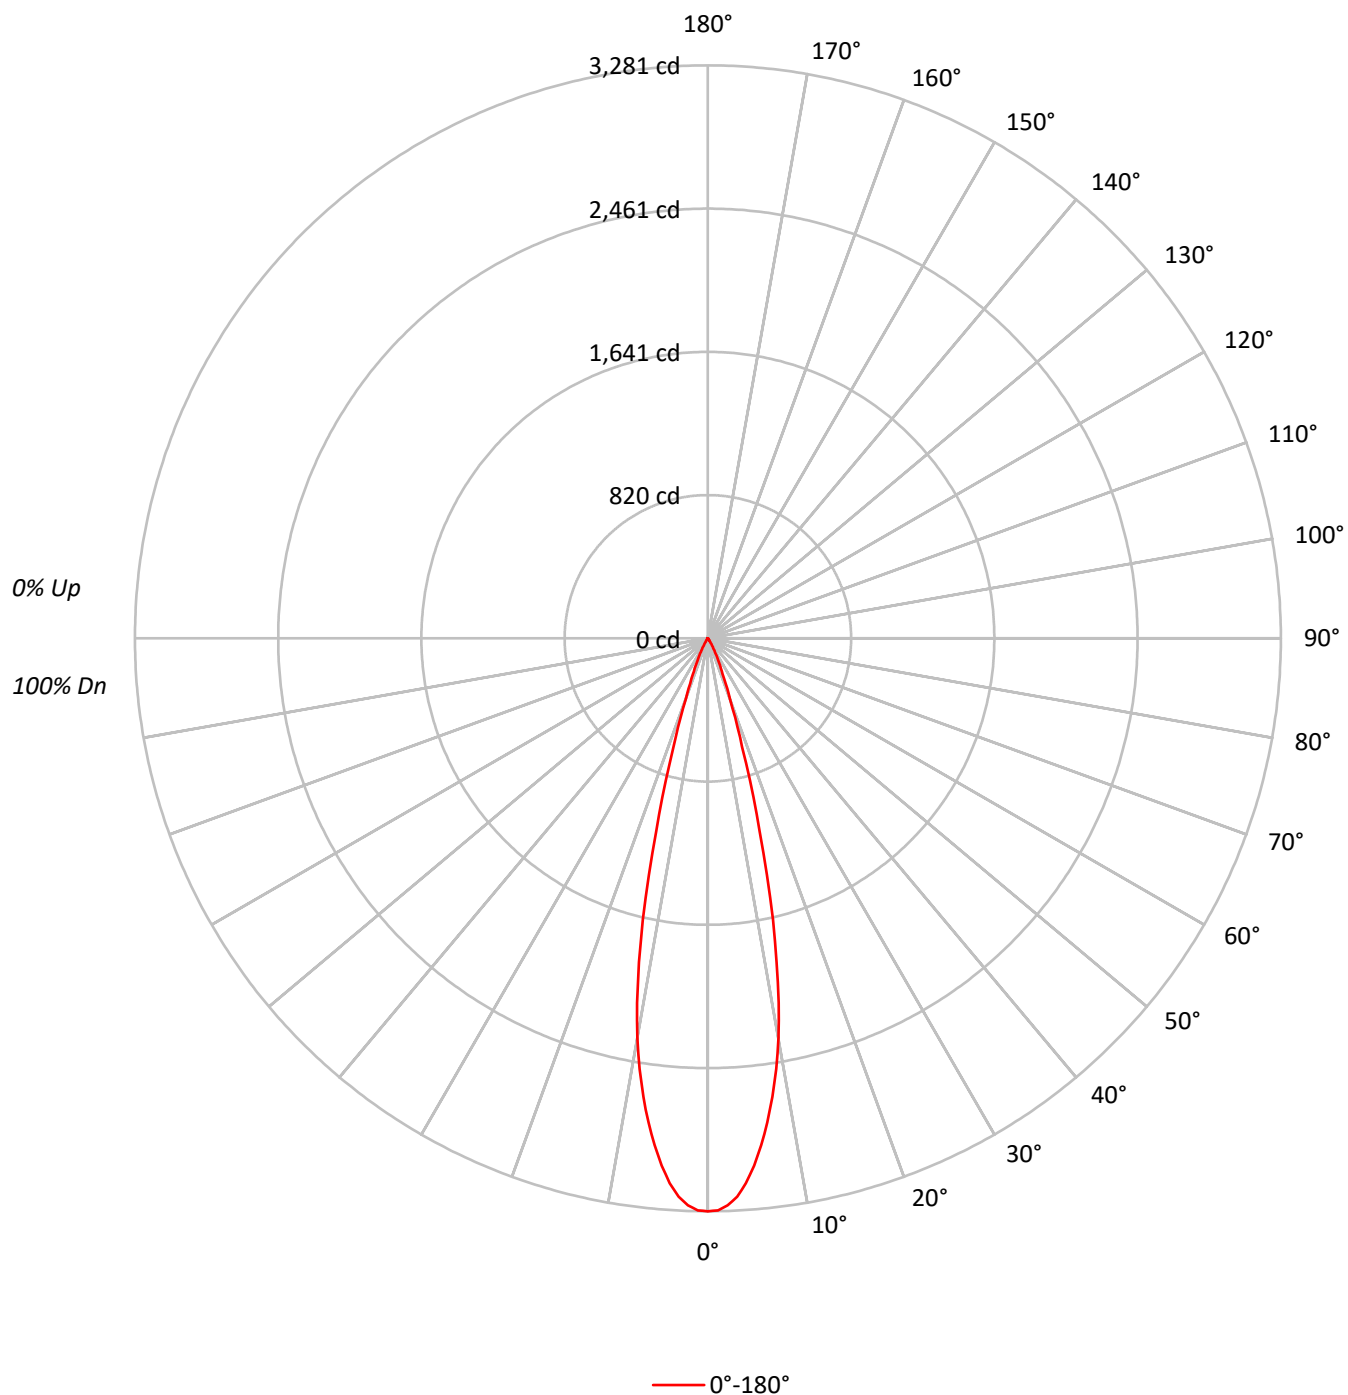

TEST NUMBER: P1292170

CATALOG NUMBER: P3A09R25W2N902750DE010 E3CD1MMS_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100	99	99	97
2	112	108	105	103	110	107	104	102	104	102	100		101	99	98		98	97	96	94
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96	94	93	92
4	105	100	97	94	104	99	96	93	97	95	92		96	93	91		94	92	90	89
5	103	97	93	90	101	96	93	90	95	92	89		93	91	89		92	90	88	87
6	100	94	90	87	99	93	90	87	92	89	87		91	88	86		90	87	86	85
7	97	91	88	85	96	91	87	85	90	87	84		89	86	84		88	85	83	83
8	95	89	85	83	94	89	85	82	88	84	82		87	84	82		86	83	81	81
9	93	87	83	80	92	86	83	80	86	82	80		85	82	80		84	82	80	79
10	91	85	81	78	90	84	81	78	84	80	78		83	80	78		82	80	78	77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	719526
5°	667355
10°	517537
15°	259502
20°	85267
25°	33897
30°	12711
35°	3667
40°	1660
45°	651
50°	546
55°	421
60°	482
65°	571
70°	321
75°	424
80°	631
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 651 cd/sqm

TEST NUMBER: P1292170

CATALOG NUMBER: P3A09R25W2N902750DE010 E3CD1MMS_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	266.7	39.6
10°-20°	318.1	47.3
20°-30°	71.7	10.7
30°-40°	11.6	1.7
40°-50°	2.1	0.3
50°-60°	1.1	0.2
60°-70°	1.0	0.2
70°-80°	0.5	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	656.5	97.6
0°-40°	668.1	99.3
0°-60°	671.4	99.8
0°-90°	673.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	673.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3281	
5°	3032	267
15°	1143	318
25°	140	72
35°	14	12
45°	2	2
55°	1	1
65°	1	1
75°	0	1
85°	0	0
90°	0	

TEST NUMBER: P1292170

CATALOG NUMBER: P3A09R25W2N902750DE010 E3CD1MMS_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	3281.3
1°	3276.1
2°	3249.6
3°	3201.0
4°	3127.5
5°	3031.8
6°	2917.6
7°	2793.8
8°	2652.1
9°	2497.2
10°	2324.3
11°	2125.0
12°	1895.5
13°	1655.5
14°	1398.0
15°	1143.1
17.5°	651.4
20°	365.4
22.5°	220.5
25°	140.1
27.5°	86.2
30°	50.2
32.5°	26.4
35°	13.7
37.5°	9.0
40°	5.8
42.5°	3.7
45°	2.1
47.5°	1.6
50°	1.6
52.5°	1.6
55°	1.1
57.5°	1.1
60°	1.1
62.5°	1.1
65°	1.1
67.5°	1.1
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1292170

CATALOG NUMBER: P3A09R25W2N902750DE010 E3CD1MMS_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)