

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292203

Luminaire Tested: P3A09R25W2N902750DE010 E3D1WMH_4000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292203
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R25W2N902750DE010 E3D1WMH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 4000K CCT AND, 90CRI ,
E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 800.0 lumens
Efficiency: N/A
Efficacy: 88.9 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292203

CATALOG NUMBER: P3A09R25W2N902750DE010 E3D1WMH_4000K

Luminous Intensity Polar Plot

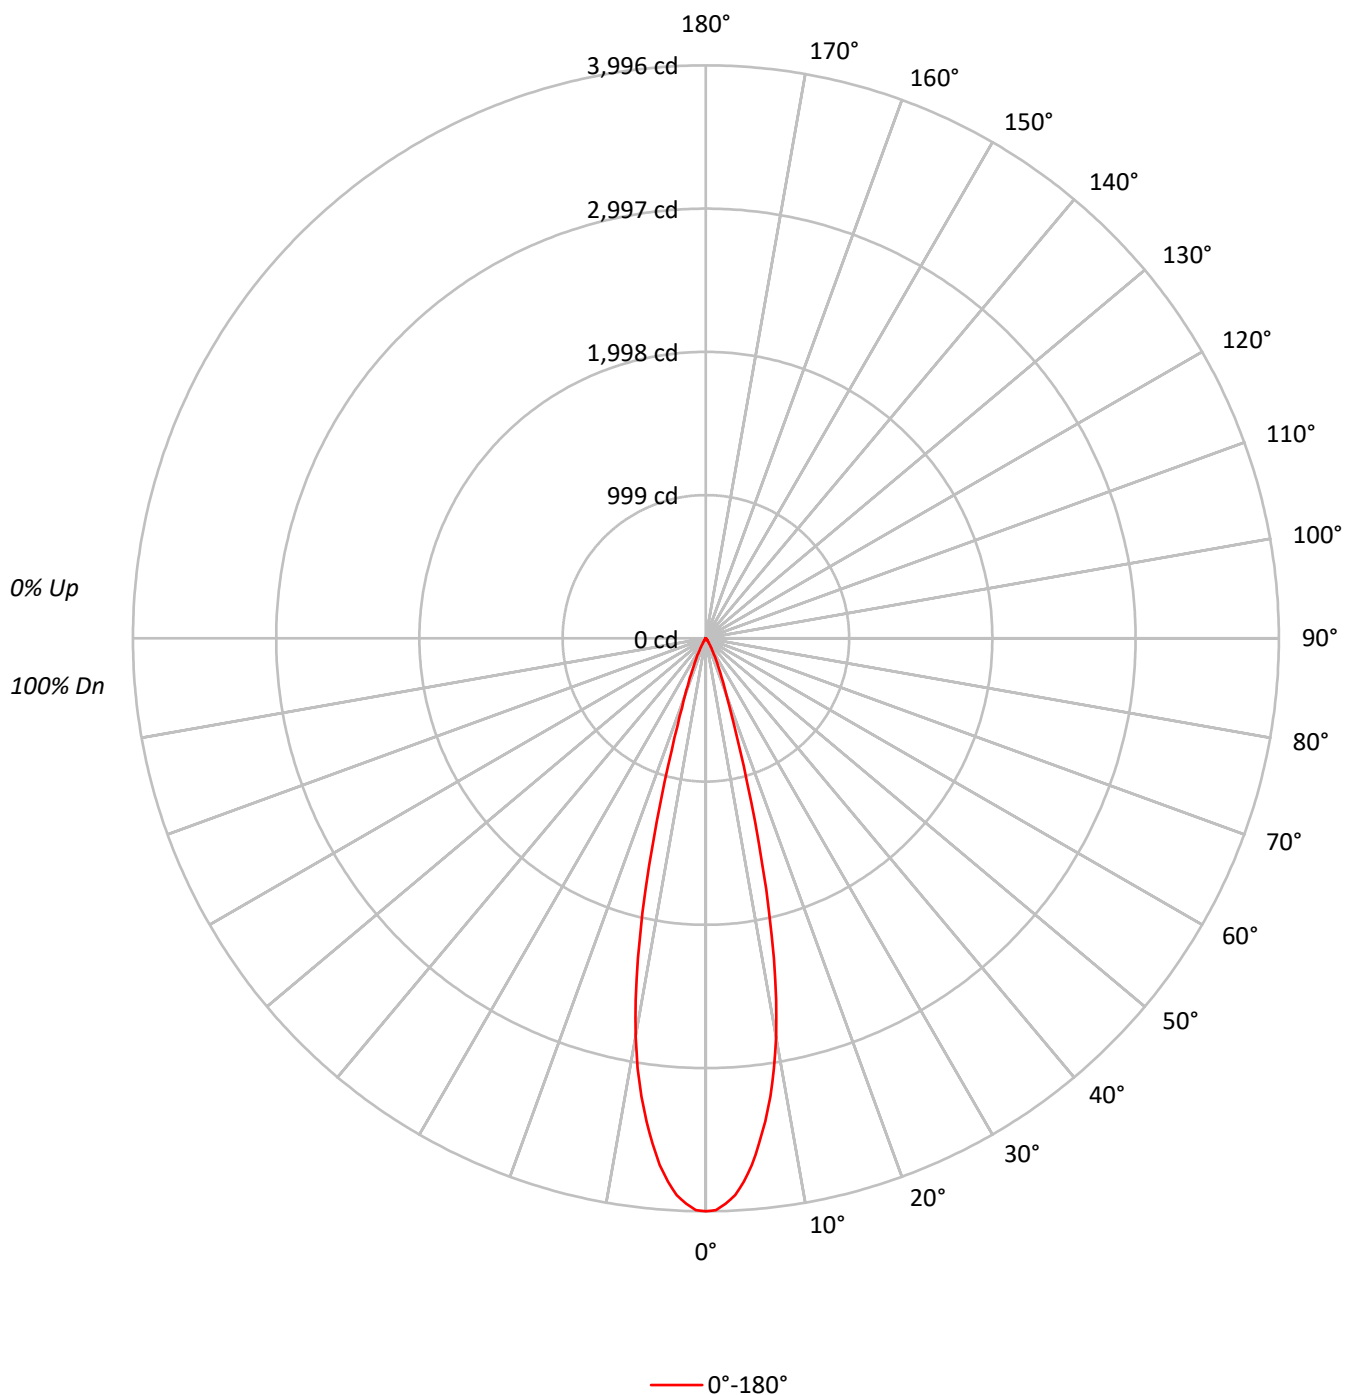

TEST NUMBER: P1292203

CATALOG NUMBER: P3A09R25W2N902750DE010 E3D1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	115	113	111	110	113	111	110	108	107	106	105		104	103	102		100	99	99		97
2	112	108	106	103	110	107	104	102	104	102	100		101	99	98		98	97	96		94
3	109	104	101	98	107	103	100	97	100	98	96		98	96	94		96	94	93		92
4	106	101	97	94	104	100	96	94	98	95	92		96	93	91		94	92	90		89
5	103	97	93	91	101	96	93	90	95	92	90		93	91	89		92	90	88		87
6	100	94	90	88	99	94	90	87	92	89	87		91	88	86		90	88	86		85
7	98	92	88	85	97	91	87	85	90	87	84		89	86	84		88	86	84		83
8	95	89	85	83	94	89	85	83	88	85	82		87	84	82		86	84	82		81
9	93	87	83	81	92	86	83	80	86	83	80		85	82	80		84	82	80		79
10	91	85	81	79	90	84	81	79	84	81	78		83	80	78		83	80	78		77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	876158
5°	811620
10°	627955
15°	299934
20°	98895
25°	41688
30°	16154
35°	6987
40°	2319
45°	1085
50°	409
55°	229
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1085 cd/sqm

TEST NUMBER: P1292203

CATALOG NUMBER: P3A09R25W2N902750DE010 E3D1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	324.1	40.5
10°-20°	368.6	46.1
20°-30°	85.7	10.7
30°-40°	18.0	2.2
40°-50°	2.9	0.4
50°-60°	0.5	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	778.4	97.3
0°-40°	796.4	99.5
0°-60°	799.8	100.0
0°-90°	800.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	800.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3996	
5°	3687	324
15°	1321	369
25°	172	86
35°	26	18
45°	4	3
55°	1	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1292203

CATALOG NUMBER: P3A09R25W2N902750DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	3995.6
1°	3987.4
2°	3946.0
3°	3887.7
4°	3798.6
5°	3687.2
6°	3544.2
7°	3394.6
8°	3226.6
9°	3037.2
10°	2820.2
11°	2568.8
12°	2280.2
13°	1964.0
14°	1633.3
15°	1321.2
16°	1045.1
17°	814.2
18°	640.4
19°	512.2
20°	423.8
21°	354.2
22°	297.3
23°	248.3
24°	207.7
25°	172.3
27.5°	102.1
30°	63.8
32.5°	40.9
35°	26.1
37.5°	15.7
40°	8.1
42.5°	5.2
45°	3.5
47.5°	2.0
50°	1.2
52.5°	0.6
55°	0.6
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.0
72.5°	0.0



TEST NUMBER: P1292203

CATALOG NUMBER: P3A09R25W2N902750DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)