

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292548

Luminaire Tested: P3A09R30W2N902750DE010 E3D1WH_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292548
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R30W2N902750DE010 E3D1WH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 736.0 lumens
Efficiency: N/A
Efficacy: 81.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292548

CATALOG NUMBER: P3A09R30W2N902750DE010 E3D1WH_3000K

Luminous Intensity Polar Plot

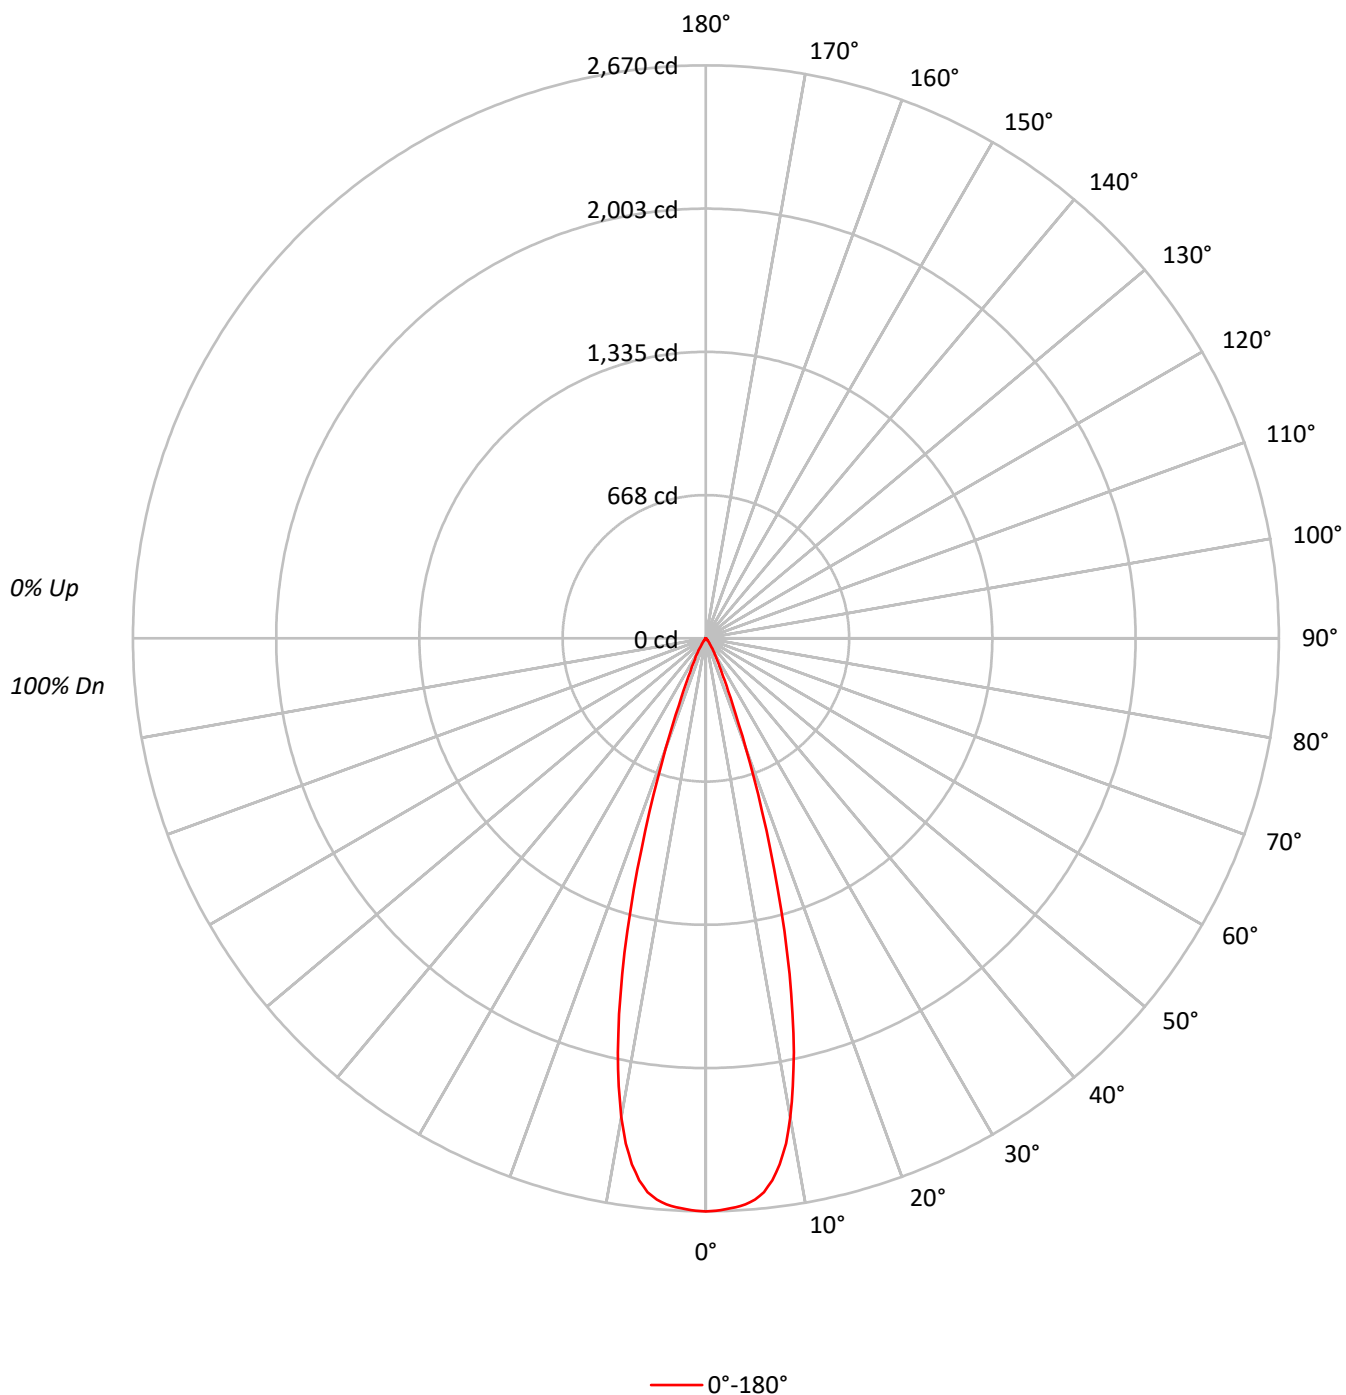



TEST NUMBER: P1292548

CATALOG NUMBER: P3A09R30W2N902750DE010 E3D1WH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		113	111	109	108		107	106	104		103	102	101		100	99	98
2	111	108	105	102		109	106	103	101		103	101	99		100	98	97		97	96	95
3	108	103	100	97		106	102	99	96		99	97	95		97	95	93		95	93	92
4	105	99	95	92		103	98	95	92		96	93	91		94	92	90		93	91	89
5	101	96	92	89		100	95	91	88		93	90	87		92	89	87		90	88	86
6	99	92	88	85		97	92	88	85		90	87	84		89	86	84		88	85	83
7	96	89	85	82		95	89	85	82		88	84	82		87	84	81		86	83	81
8	93	87	83	80		92	86	82	80		85	82	79		84	81	79		84	81	79
9	91	84	80	77		90	84	80	77		83	79	77		82	79	77		82	79	77
10	88	82	78	75		88	81	78	75		81	77	75		80	77	75		80	77	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	585589
5°	577943
10°	504600
15°	320728
20°	127084
25°	42438
30°	19750
35°	8941
40°	3435
45°	1675
50°	478
55°	229
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1675 cd/sqm

TEST NUMBER: P1292548

CATALOG NUMBER: P3A09R30W2N902750DE010 E3D1WH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	240.1	32.6
10°-20°	372.3	50.6
20°-30°	96.0	13.0
30°-40°	22.5	3.1
40°-50°	4.4	0.6
50°-60°	0.5	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	708.3	96.2
0°-40°	730.8	99.3
0°-60°	735.7	100.0
0°-90°	736.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	736.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2670	
5°	2626	240
15°	1413	372
25°	175	96
35°	33	23
45°	5	4
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1292548

CATALOG NUMBER: P3A09R30W2N902750DE010 E3D1WH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2670.5
1°	2668.5
2°	2662.2
3°	2655.0
4°	2644.5
5°	2625.6
6°	2595.1
7°	2544.2
8°	2474.8
9°	2384.2
10°	2266.2
11°	2125.9
12°	1972.8
13°	1796.5
14°	1611.9
15°	1412.8
16°	1217.7
17°	1029.7
18°	849.4
19°	684.0
20°	544.6
21°	428.6
22°	337.1
23°	266.8
24°	213.7
25°	175.4
26°	146.3
27°	124.3
28°	107.4
29°	92.0
30°	78.0
32.5°	49.1
35°	33.4
37.5°	20.9
40°	12.0
42.5°	8.0
45°	5.4
47.5°	3.1
50°	1.4
52.5°	0.6
55°	0.6
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3



TEST NUMBER: P1292548

CATALOG NUMBER: P3A09R30W2N902750DE010 E3D1WH_3000K

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.3
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)