

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292734

Luminaire Tested: P3A09R30W2N902765DE010 E3DL1H_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292734
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R30W2N902765DE010 E3DL1H_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,
E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 560.0 lumens
Efficiency: N/A
Efficacy: 62.2 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292734

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DL1H_2700K

Luminous Intensity Polar Plot

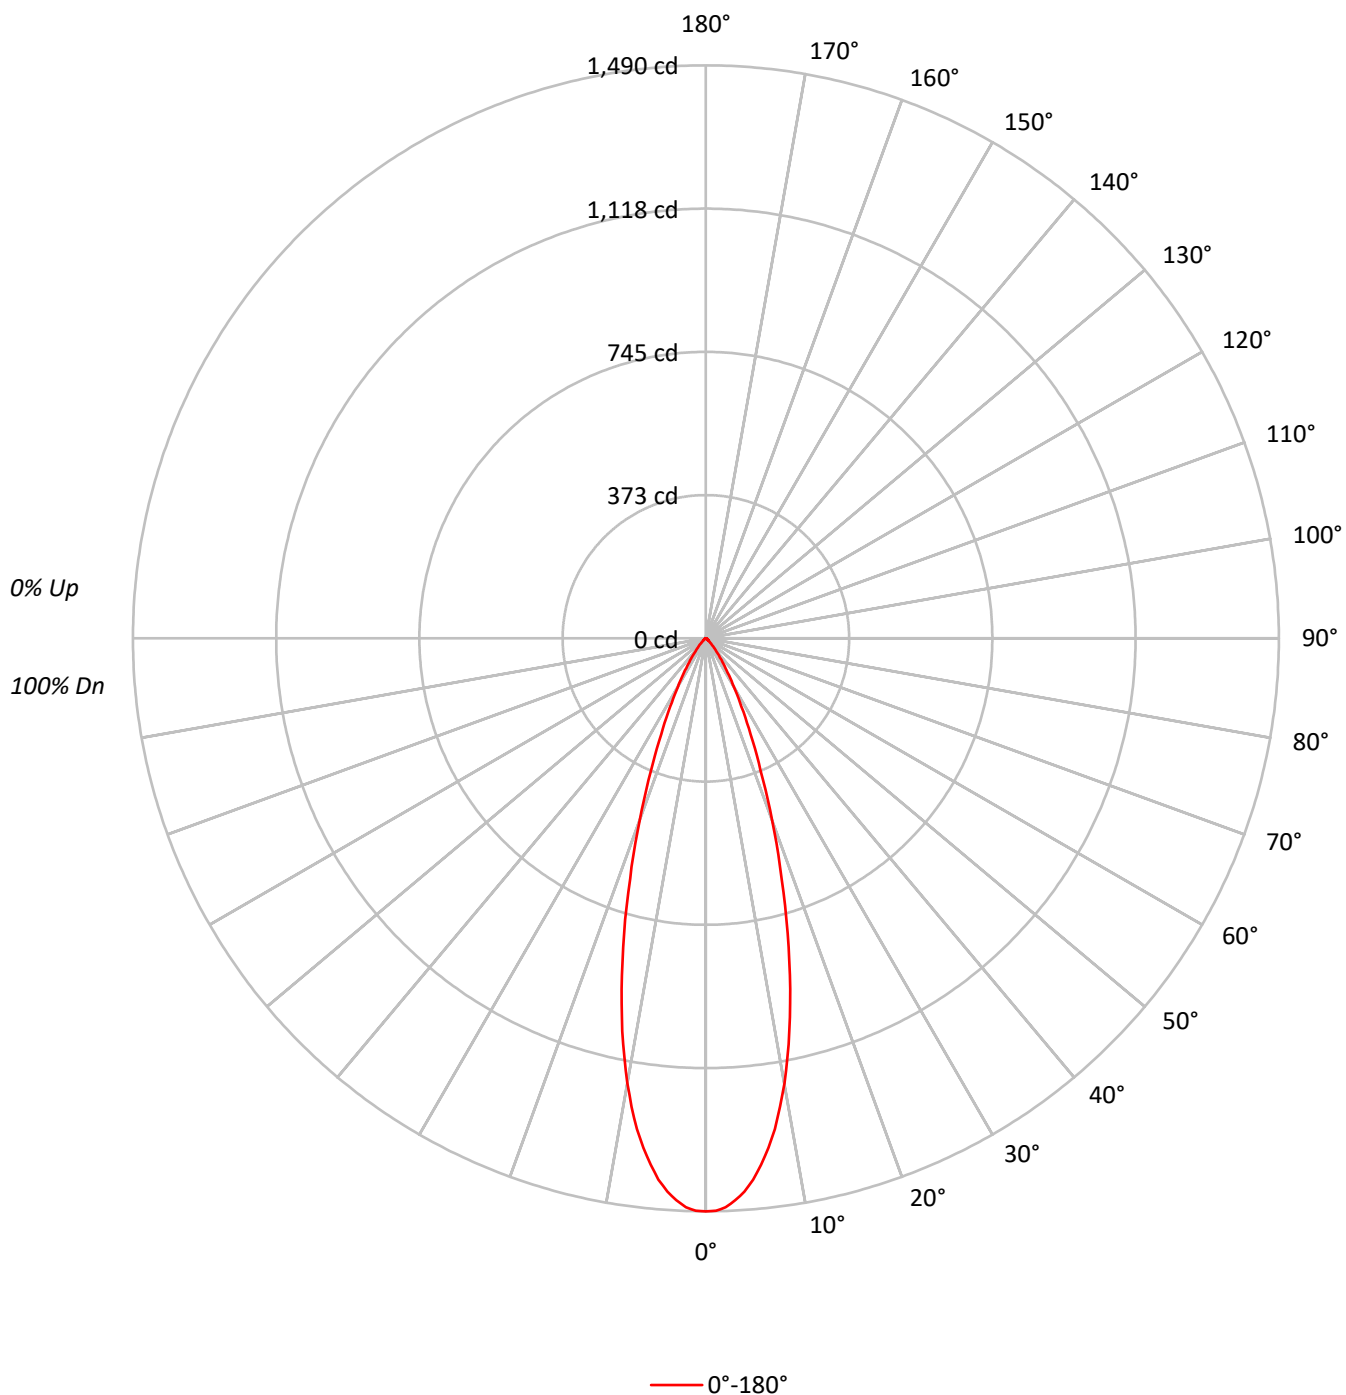

TEST NUMBER: P1292734

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DL1H_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97		95
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95	93	92		90
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91	89	87		86
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88	85	83		82
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85	82	79		78
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81	78	76		75
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		79	75	73		71
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76	72	70		69
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73	70	67		66
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71	67	65		63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	326772
5°	311027
10°	261607
15°	188673
20°	117027
25°	66560
30°	36968
35°	20104
40°	10591
45°	5737
50°	3070
55°	2026
60°	1842
65°	1920
70°	1667
75°	1356
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5737 cd/sqm

TEST NUMBER: P1292734

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DL1H_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.2	22.7
10°-20°	226.2	40.4
20°-30°	130.7	23.3
30°-40°	49.6	8.9
40°-50°	15.2	2.7
50°-60°	5.1	0.9
60°-70°	3.5	0.6
70°-80°	1.9	0.3
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	484.1	86.4
0°-40°	533.7	95.3
0°-60°	554.1	98.9
0°-90°	560.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	560.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1490	
5°	1413	127
15°	831	226
25°	275	131
35°	75	50
45°	18	15
55°	5	5
65°	4	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1292734

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DL1H_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1490.2
1°	1489.2
2°	1480.2
3°	1463.2
4°	1442.1
5°	1413.0
6°	1376.0
7°	1334.7
8°	1288.7
9°	1233.7
10°	1174.9
11°	1111.5
12°	1044.3
13°	973.9
14°	902.5
15°	831.1
17.5°	655.4
20°	501.5
22.5°	371.9
25°	275.1
27.5°	200.0
30°	146.0
32.5°	105.3
35°	75.1
37.5°	52.4
40°	37.0
42.5°	25.9
45°	18.5
47.5°	12.7
50°	9.0
52.5°	6.3
55°	5.3
57.5°	4.8
60°	4.2
62.5°	3.7
65°	3.7
67.5°	3.2
70°	2.6
72.5°	2.1
75°	1.6
77.5°	1.6
80°	1.1
82.5°	1.1
85°	0.5
87.5°	0.0



TEST NUMBER: P1292734

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DL1H_2700K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)