

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292796

Luminaire Tested: P3A09R30W2N902765DE010 E3DLD1WMH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292796
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R30W2N902765DE010 E3DLD1WMH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 482.0 lumens
Efficiency: N/A
Efficacy: 53.6 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292796

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLD1WMH_3500K

Luminous Intensity Polar Plot

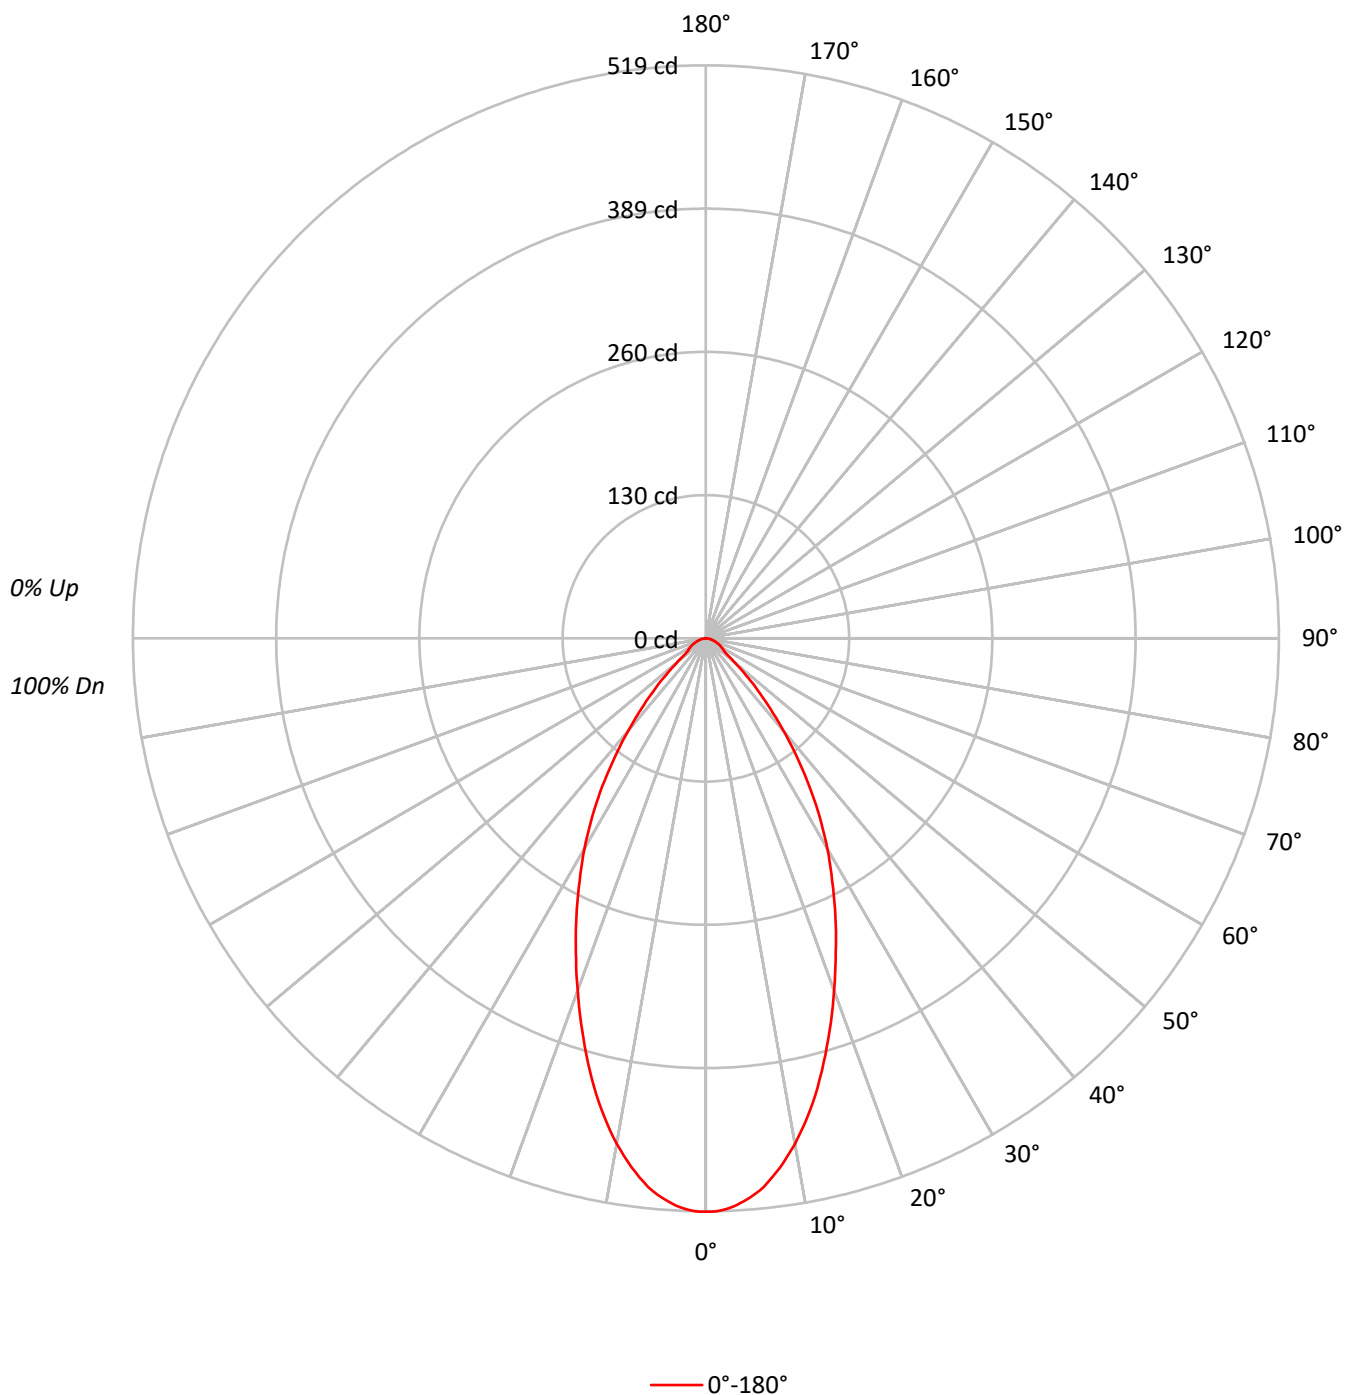

TEST NUMBER: P1292796

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLD1WMH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91		
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83		
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	84	80	78	76		
4	94	85	79	74	92	84	79	74	82	77	73	80	76	72	78	74	71	70		
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64		
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59		
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55		
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51		
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48		
10	68	57	51	47	67	57	51	47	56	50	47	55	50	46	54	50	46	45		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	113872
5°	111314
10°	103516
15°	92100
20°	79224
25°	67117
30°	55705
35°	43687
40°	31316
45°	20529
50°	11701
55°	7684
60°	7280
65°	6745
70°	6091
75°	5507
80°	5177
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 20529 cd/sqm

TEST NUMBER: P1292796

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLD1WMH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.9	9.7
10°-20°	112.8	23.4
20°-30°	127.1	26.4
30°-40°	101.5	21.1
40°-50°	52.2	10.8
50°-60°	19.6	4.1
60°-70°	12.9	2.7
70°-80°	6.9	1.4
80°-90°	2.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	286.9	59.5
0°-40°	388.3	80.6
0°-60°	460.1	95.5
0°-90°	482.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	482.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	519	
5°	506	47
15°	406	113
25°	277	127
35°	163	101
45°	66	52
55°	20	20
65°	13	13
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1292796

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLD1WMH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	519.3
1°	519.3
2°	517.5
3°	514.6
4°	510.4
5°	505.7
6°	499.8
7°	492.1
8°	483.8
9°	474.4
10°	464.9
11°	454.2
12°	443.0
13°	431.2
14°	418.8
15°	405.7
17.5°	372.6
20°	339.5
22.5°	307.6
25°	277.4
27.5°	247.8
30°	220.0
32.5°	191.6
35°	163.2
37.5°	135.4
40°	109.4
42.5°	86.4
45°	66.2
47.5°	49.1
50°	34.3
52.5°	24.2
55°	20.1
57.5°	18.3
60°	16.6
62.5°	14.8
65°	13.0
67.5°	11.2
70°	9.5
72.5°	7.7
75°	6.5
77.5°	5.3
80°	4.1
82.5°	3.0
85°	1.8
87.5°	0.6



TEST NUMBER: P1292796

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLD1WMH_3500K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)