

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292801

Luminaire Tested: P3A09R30W2N902765DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292801
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R30W2N902765DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 184.0 lumens
Efficiency: N/A
Efficacy: 20.4 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292801
CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

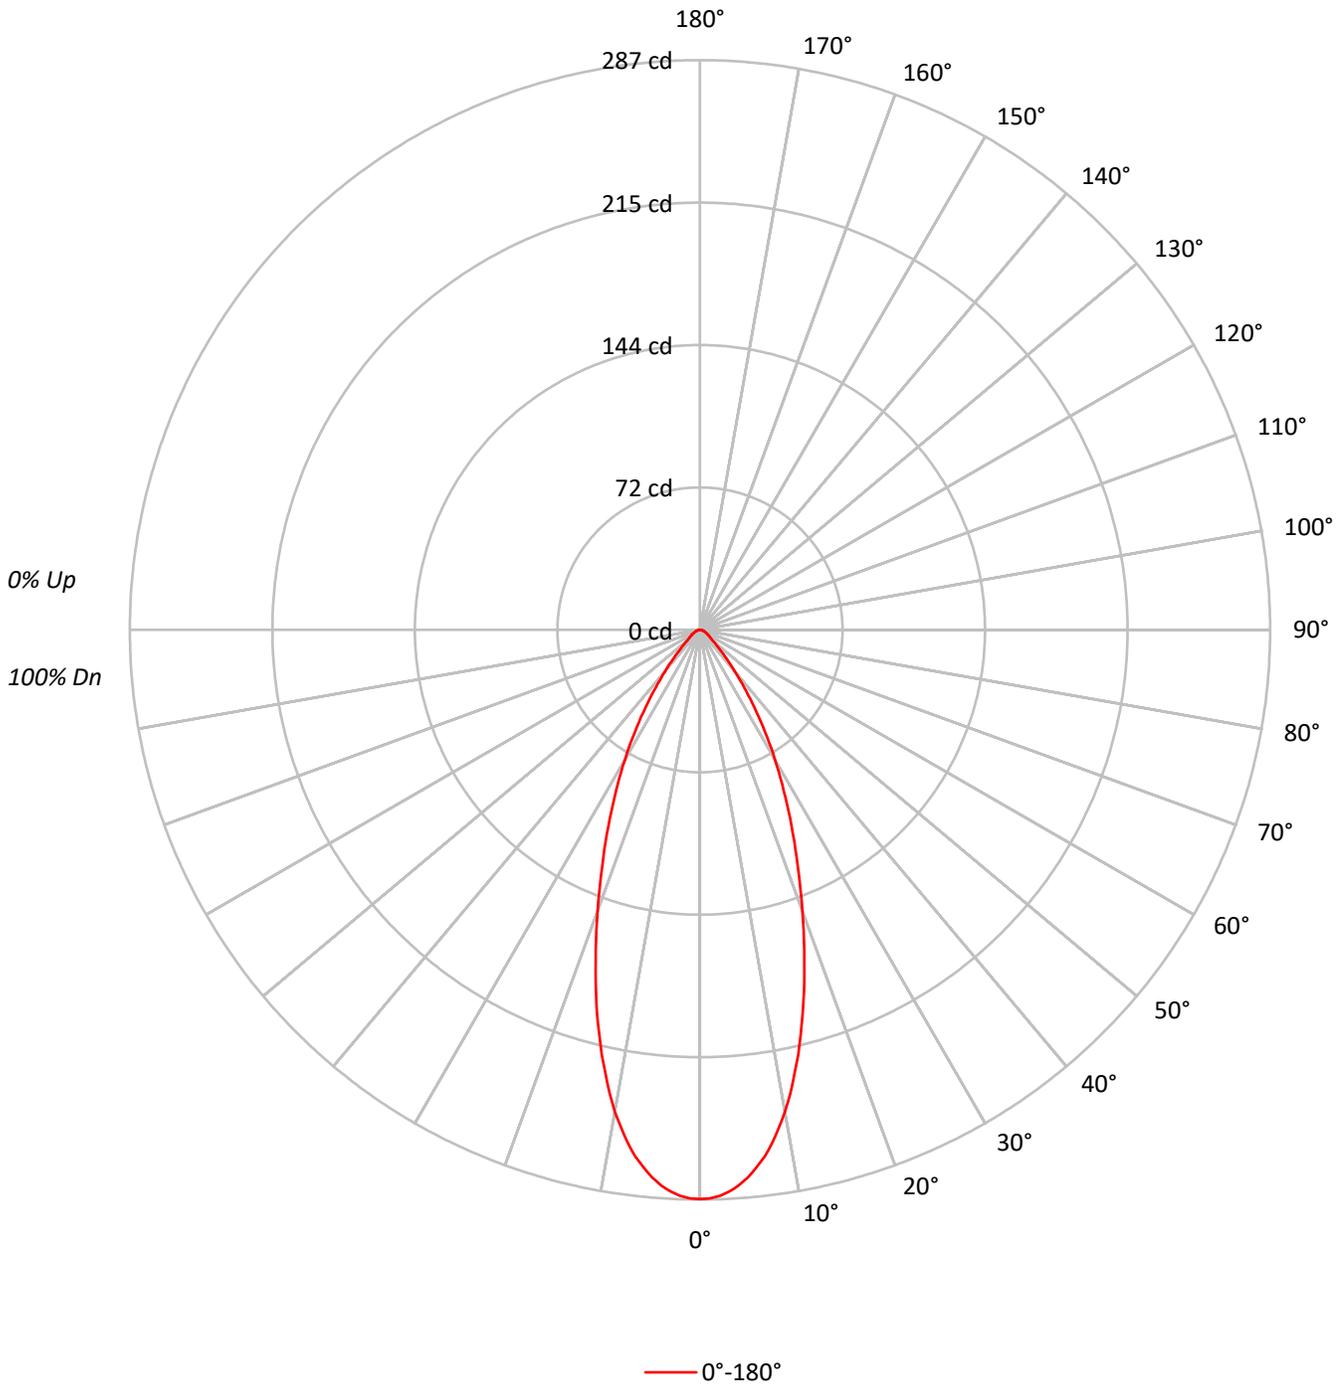



TEST NUMBER: P1292801

CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	25.5	13.8
10°-20°	55.1	29.9
20°-30°	50.1	27.2
30°-40°	30.3	16.5
40°-50°	12.1	6.6
50°-60°	5.4	2.9
60°-70°	3.3	1.8
70°-80°	1.8	1.0
80°-90°	0.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	130.7	71.0
0°-40°	160.9	87.5
0°-60°	178.5	97.0
0°-90°	184.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	184.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	287	
5°	277	25
15°	200	55
25°	109	50
35°	48	30
45°	15	12
55°	6	5
65°	3	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1292801
CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	286.7
1°	286.5
2°	285.3
3°	283.3
4°	280.5
5°	276.8
6°	272.2
7°	267.3
8°	261.1
9°	253.9
10°	246.5
11°	238.0
12°	228.8
13°	219.7
14°	209.7
15°	200.0
17.5°	174.6
20°	150.6
22.5°	128.4
25°	109.0
27.5°	91.3
30°	75.6
32.5°	61.1
35°	47.6
37.5°	36.5
40°	27.4
42.5°	20.0
45°	14.8
47.5°	11.1
50°	8.3
52.5°	6.6
55°	6.0
57.5°	5.1
60°	4.6
62.5°	3.7
65°	3.1
67.5°	2.9
70°	2.3
72.5°	2.0
75°	1.7
77.5°	1.4
80°	0.9
82.5°	0.6
85°	0.6
87.5°	0.3



TEST NUMBER: P1292801
CATALOG NUMBER: P3A09R30W2N902765DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)