

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292980

Luminaire Tested: P3A09R35W2N902750DE010 E3PH1MW_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292980
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R35W2N902750DE010 E3PH1MW_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
E3PH1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 677.0 lumens
Efficiency: N/A
Efficacy: 75.2 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292980

CATALOG NUMBER: P3A09R35W2N902750DE010 E3PH1MW_3000K

Luminous Intensity Polar Plot

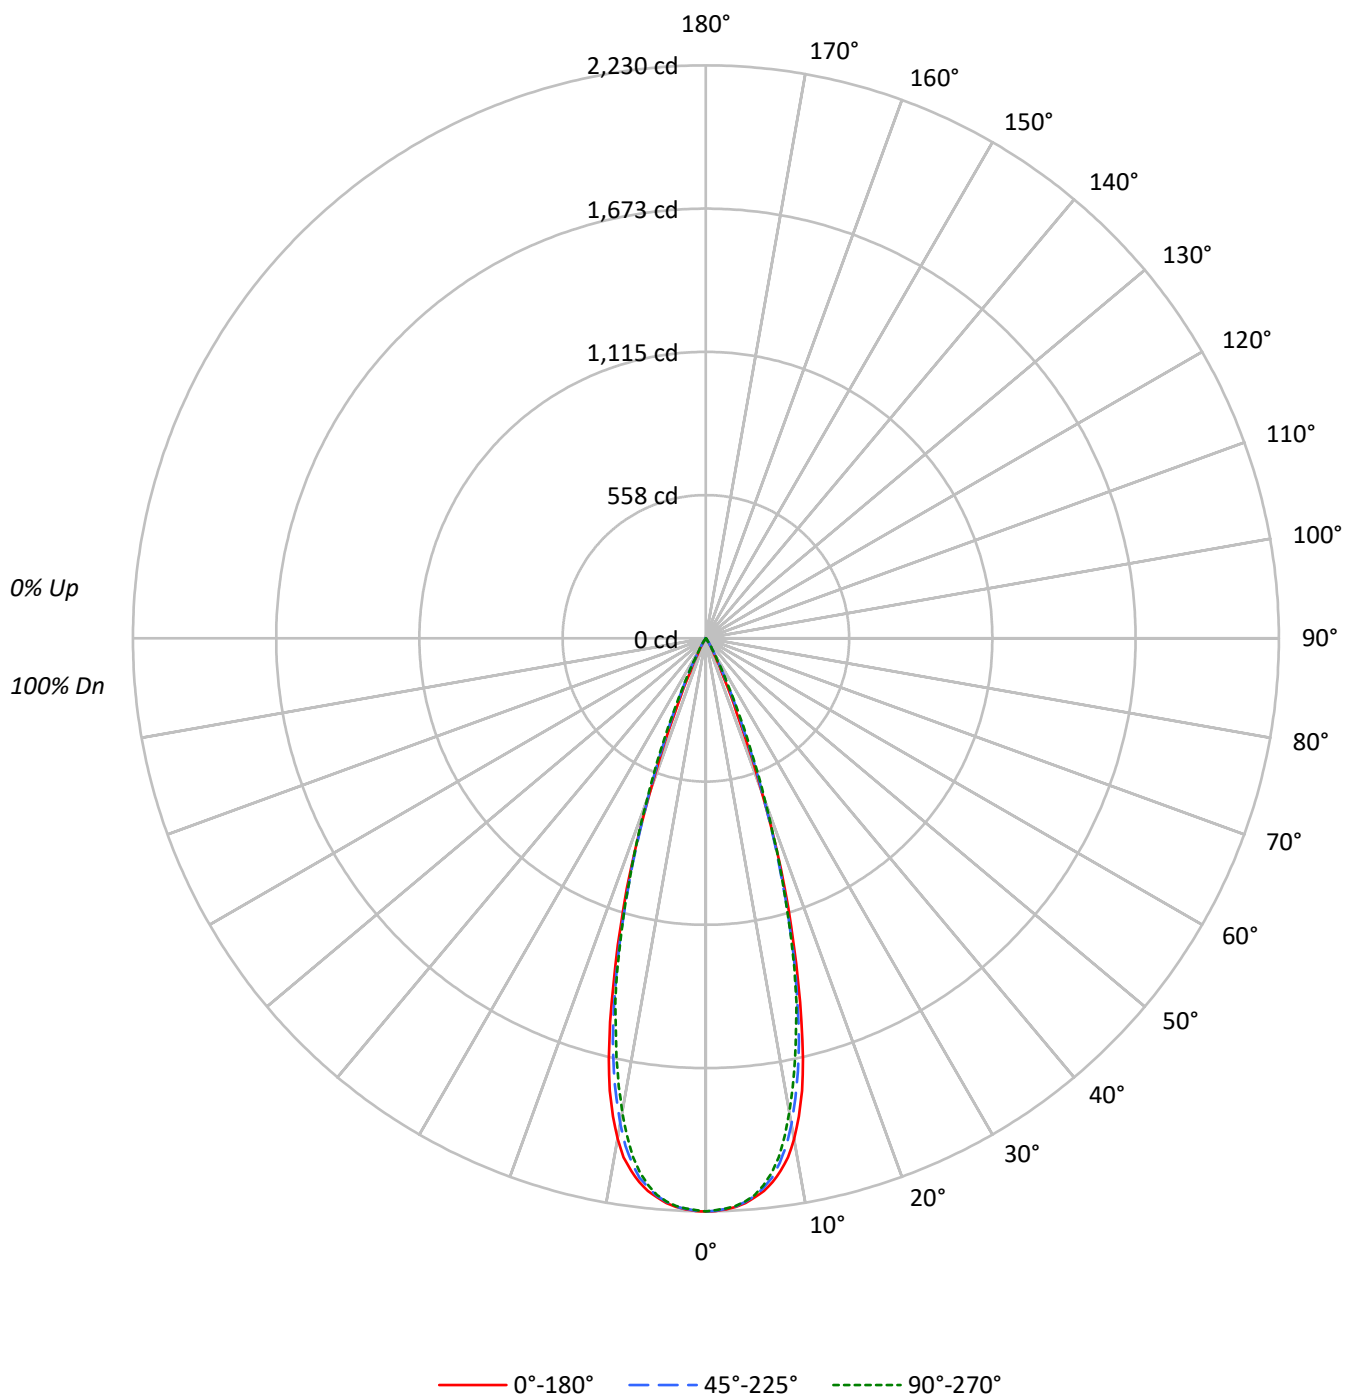

TEST NUMBER: P1292980

CATALOG NUMBER: P3A09R35W2N902750DE010 E3PH1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100	99	98		97
2	111	108	105	102	109	106	103	101	103	101	99		100	98	97		97	96	95		93
3	108	103	100	97	106	102	99	96	99	97	94		97	95	93		95	93	92		90
4	104	99	95	92	103	98	94	92	96	93	91		94	92	90		93	90	89		87
5	101	95	91	88	100	95	91	88	93	90	87		92	89	87		90	88	86		85
6	98	92	88	85	97	91	88	85	90	87	84		89	86	84		88	85	83		82
7	96	89	85	82	94	89	85	82	87	84	81		86	83	81		85	83	81		80
8	93	86	82	79	92	86	82	79	85	81	79		84	81	79		83	80	78		77
9	90	84	80	77	89	83	79	77	82	79	76		82	79	76		81	78	76		75
10	88	81	77	75	87	81	77	74	80	77	74		80	76	74		79	76	74		73

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	489106	489106	489106
5°	480694	479682	478647
10°	440562	427313	416915
15°	315462	305405	301704
20°	146289	151306	156627
25°	34720	49382	51487
30°	10179	11673	13141
35°	2329	3748	3426
40°	487	1002	658
45°	186	186	186
50°	205	0	205
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 216 cd/sqm

TEST NUMBER: P1292980

CATALOG NUMBER: P3A09R35W2N902750DE010 E3PH1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.3	29.6
10°-20°	358.0	52.9
20°-30°	107.7	15.9
30°-40°	10.3	1.5
40°-50°	0.7	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	665.9	98.4
0°-40°	676.2	99.9
0°-60°	677.0	100.0
0°-90°	677.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	677.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2230	2230	2230	2230	2230	
5°	2184	2183	2179	2176	2174	202
15°	1390	1379	1345	1340	1329	367
25°	144	158	204	213	213	92
35°	9	12	14	15	13	8
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1292980

CATALOG NUMBER: P3A09R35W2N902750DE010 E3PH1MW_3000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2230.5	2230.5	2230.5	2230.5	2230.5
1°	2229.3	2229.3	2228.1	2228.1	2225.8
2°	2224.1	2224.6	2222.3	2221.7	2220.0
3°	2215.9	2214.2	2214.2	2213.0	2211.8
4°	2203.1	2199.6	2198.4	2199.0	2196.7
5°	2183.8	2183.2	2179.2	2176.2	2174.5
6°	2162.8	2158.8	2150.0	2142.4	2140.7
7°	2131.3	2122.6	2115.0	2099.3	2096.9
8°	2092.9	2078.9	2062.5	2040.4	2039.2
9°	2045.6	2022.9	2000.1	1970.4	1959.9
10°	1978.6	1957.6	1919.1	1892.8	1872.4
11°	1895.2	1868.9	1824.0	1792.5	1775.6
12°	1800.7	1776.2	1723.7	1695.2	1671.3
13°	1679.4	1659.0	1610.0	1578.5	1559.9
14°	1538.9	1523.7	1477.1	1463.1	1456.7
15°	1389.6	1379.1	1345.3	1339.5	1329.0
17.5°	1022.8	1005.3	986.1	989.6	993.1
20°	626.9	651.4	648.4	661.3	671.2
22.5°	312.6	344.0	380.8	402.9	414.0
25°	143.5	158.0	204.1	212.8	212.8
27.5°	72.3	75.8	96.2	98.0	102.6
30°	40.2	43.2	46.1	51.3	51.9
32.5°	20.4	23.9	25.1	28.0	26.8
35°	8.7	11.7	14.0	15.2	12.8
37.5°	4.1	5.2	7.6	7.0	5.2
40°	1.7	2.3	3.5	2.9	2.3
42.5°	1.2	1.2	1.7	1.2	1.2
45°	0.6	0.6	0.6	0.6	0.6
47.5°	0.6	0.6	0.0	0.6	0.6
50°	0.6	0.0	0.0	0.0	0.6
52.5°	0.6	0.0	0.0	0.0	0.6
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1292980

CATALOG NUMBER: P3A09R35W2N902750DE010 E3PH1MW_3000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)