

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293040

Luminaire Tested: P3A09R35W2N902765DE010 E3DL1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1293040  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A09R35W2N902765DE010 E3DL1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 5000K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 303.0 lumens  
Efficiency: N/A  
Efficacy: 33.7 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1293040

CATALOG NUMBER: P3A09R35W2N902765DE010 E3DL1GPH\_5000K

### Luminous Intensity Polar Plot

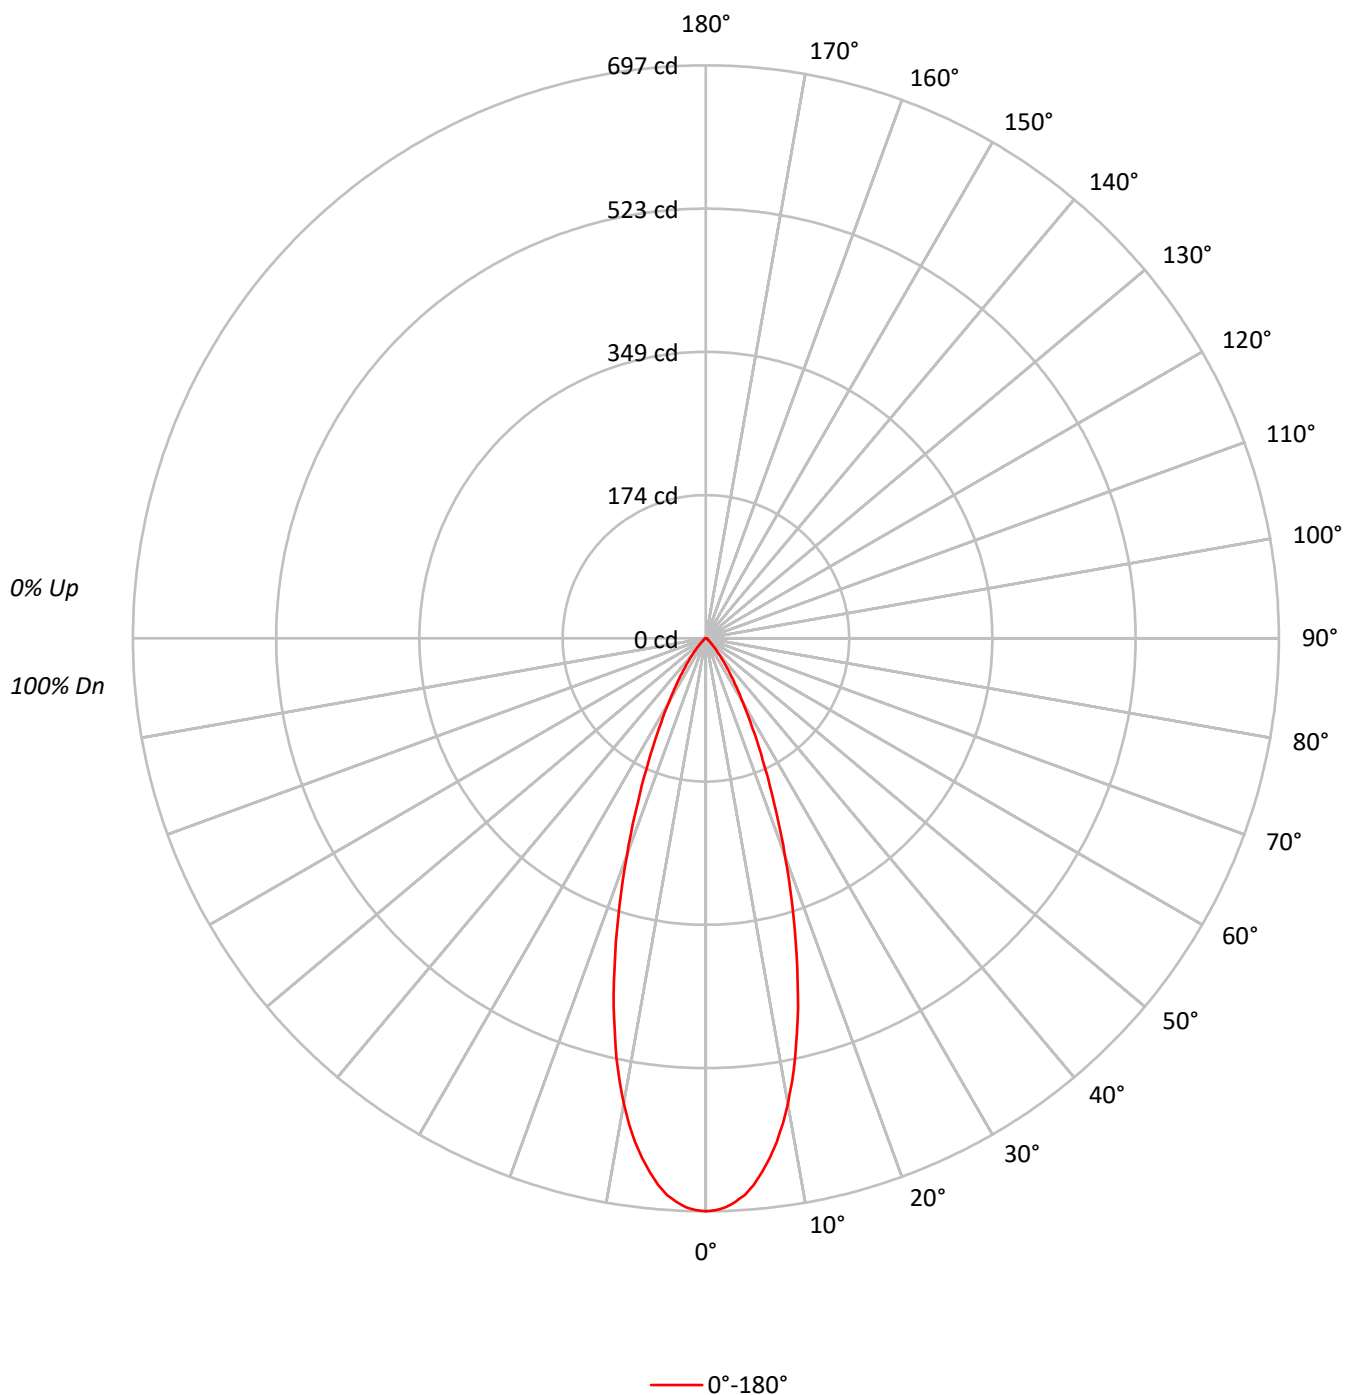

TEST NUMBER: P1293040

CATALOG NUMBER: P3A09R35W2N902765DE010 E3DL1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     |     | 0   |     |     |     | 0   |     |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1   | 114 | 112 | 109 | 107 | 112 | 109 | 107 | 106 | 105 | 104 | 102 | 102 | 100 | 99  | 98  | 97  | 96  | 95  | 94  | 93  | 91  | 90  | 89  | 88  | 86  | 85  | 84  | 82  | 80  |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 97  | 95  | 97  | 95  | 93  | 94  | 93  | 91  | 90  | 89  | 88  | 86  | 85  | 84  | 82  | 80  | 78  | 76  | 74  | 73  |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 88  | 86  | 85  | 84  | 82  | 80  | 78  | 76  | 74  | 73  | 71  | 70  | 68  | 66  |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 91  | 87  | 84  | 89  | 85  | 83  | 87  | 84  | 82  | 80  | 78  | 76  | 74  | 73  | 71  | 70  | 68  | 66  | 64  | 62  | 61  |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 80  | 86  | 82  | 79  | 85  | 81  | 78  | 83  | 80  | 78  | 76  | 74  | 73  | 71  | 70  | 68  | 66  | 64  | 62  | 61  | 60  | 59  |
| 6   | 92  | 85  | 80  | 76  | 91  | 84  | 79  | 76  | 83  | 78  | 75  | 81  | 77  | 75  | 80  | 77  | 74  | 73  | 71  | 70  | 68  | 66  | 64  | 62  | 61  | 60  | 59  | 58  | 57  |
| 7   | 89  | 81  | 76  | 72  | 88  | 80  | 75  | 72  | 79  | 75  | 71  | 78  | 74  | 71  | 77  | 73  | 71  | 70  | 68  | 66  | 64  | 62  | 61  | 60  | 59  | 58  | 57  | 56  | 55  |
| 8   | 85  | 77  | 72  | 69  | 84  | 77  | 72  | 68  | 76  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 68  | 66  | 64  | 62  | 61  | 60  | 59  | 58  | 57  | 56  | 55  | 54  | 53  |
| 9   | 82  | 74  | 69  | 66  | 81  | 74  | 69  | 65  | 73  | 68  | 65  | 72  | 68  | 65  | 71  | 67  | 65  | 63  | 61  | 60  | 59  | 58  | 57  | 56  | 55  | 54  | 53  | 52  | 51  |
| 10  | 79  | 71  | 66  | 63  | 78  | 71  | 66  | 63  | 70  | 66  | 63  | 69  | 65  | 62  | 69  | 65  | 62  | 60  | 58  | 57  | 56  | 55  | 54  | 53  | 52  | 51  | 50  | 49  | 48  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
| 0°  | 152817 |
| 5°  | 146863 |
| 10° | 127965 |
| 15° | 98026  |
| 20° | 65572  |
| 25° | 39680  |
| 30° | 22763  |
| 35° | 12742  |
| 40° | 6756   |
| 45° | 3473   |
| 50° | 1672   |
| 55° | 1338   |
| 60° | 1272   |
| 65° | 1038   |
| 70° | 1090   |
| 75° | 1017   |
| 80° | 1137   |
| 85° | 755    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 3473 cd/sqm

TEST NUMBER: P1293040

CATALOG NUMBER: P3A09R35W2N902765DE010 E3DL1GPH\_5000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 60.7   | 20.0      |
| 10°-20°   | 117.6  | 38.8      |
| 20°-30°   | 77.0   | 25.4      |
| 30°-40°   | 31.2   | 10.3      |
| 40°-50°   | 9.4    | 3.1       |
| 50°-60°   | 3.2    | 1.1       |
| 60°-70°   | 2.1    | 0.7       |
| 70°-80°   | 1.3    | 0.4       |
| 80°-90°   | 0.4    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 255.4  | 84.3      |
| 0°-40°    | 286.6  | 94.6      |
| 0°-60°    | 299.2  | 98.7      |
| 0°-90°    | 303.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 303.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 697 |      |
| 5°  | 667 | 61   |
| 15° | 432 | 118  |
| 25° | 164 | 77   |
| 35° | 48  | 31   |
| 45° | 11  | 9    |
| 55° | 4   | 3    |
| 65° | 2   | 2    |
| 75° | 1   | 1    |
| 85° | 0   | 0    |
| 90° | 0   |      |

TEST NUMBER: P1293040

CATALOG NUMBER: P3A09R35W2N902765DE010 E3DL1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 696.9 |
| 1°    | 695.8 |
| 2°    | 692.6 |
| 3°    | 686.3 |
| 4°    | 678.8 |
| 5°    | 667.2 |
| 6°    | 652.8 |
| 7°    | 636.7 |
| 8°    | 618.5 |
| 9°    | 597.8 |
| 10°   | 574.7 |
| 11°   | 549.1 |
| 12°   | 522.3 |
| 13°   | 492.3 |
| 14°   | 463.7 |
| 15°   | 431.8 |
| 17.5° | 354.2 |
| 20°   | 281.0 |
| 22.5° | 216.2 |
| 25°   | 164.0 |
| 27.5° | 122.2 |
| 30°   | 89.9  |
| 32.5° | 66.0  |
| 35°   | 47.6  |
| 37.5° | 33.7  |
| 40°   | 23.6  |
| 42.5° | 16.4  |
| 45°   | 11.2  |
| 47.5° | 7.5   |
| 50°   | 4.9   |
| 52.5° | 3.7   |
| 55°   | 3.5   |
| 57.5° | 3.2   |
| 60°   | 2.9   |
| 62.5° | 2.6   |
| 65°   | 2.0   |
| 67.5° | 1.7   |
| 70°   | 1.7   |
| 72.5° | 1.4   |
| 75°   | 1.2   |
| 77.5° | 0.9   |
| 80°   | 0.9   |
| 82.5° | 0.6   |
| 85°   | 0.3   |
| 87.5° | 0.3   |



TEST NUMBER: P1293040

CATALOG NUMBER: P3A09R35W2N902765DE010 E3DL1GPH\_5000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)