

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293078

Luminaire Tested: P3A09R35W2N902765DE010 E3DLD1H\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1293078  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A09R35W2N902765DE010 E3DLD1H\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 2700K CCT AND, 90CRI ,  
E3DLD1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 428.0 lumens  
Efficiency: N/A  
Efficacy: 47.6 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1293078  
CATALOG NUMBER: P3A09R35W2N902765DE010 E3DLD1H\_2700K

### Luminous Intensity Polar Plot

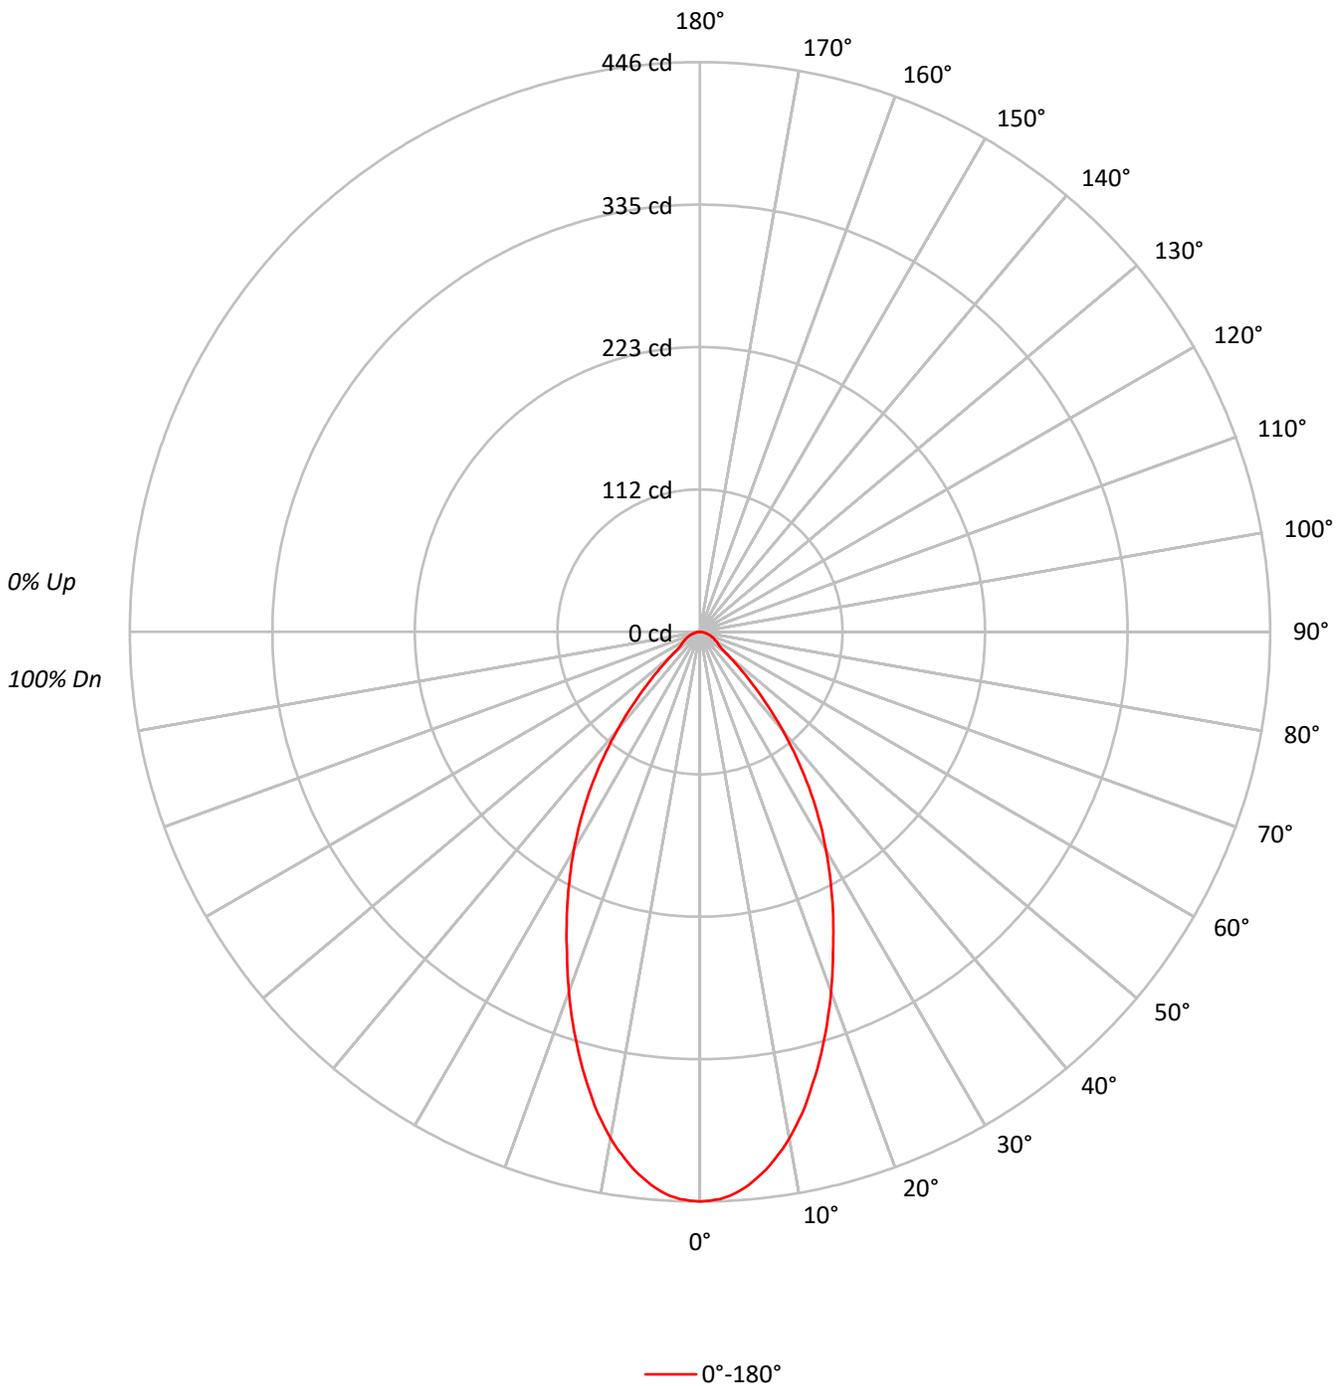





TEST NUMBER: P1293078

CATALOG NUMBER: P3A09R35W2N902765DE010 E3DLD1H\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	40.5	9.5
10°-20°	98.6	23.0
20°-30°	113.0	26.4
30°-40°	92.2	21.5
40°-50°	46.5	10.9
50°-60°	17.3	4.0
60°-70°	11.6	2.7
70°-80°	6.4	1.5
80°-90°	1.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	252.1	58.9
0°-40°	344.3	80.4
0°-60°	408.1	95.3
0°-90°	428.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	428.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	446	
5°	435	40
15°	354	99
25°	246	113
35°	149	92
45°	59	47
55°	18	17
65°	12	12
75°	6	6
85°	2	2
90°	0	



TEST NUMBER: P1293078  
CATALOG NUMBER: P3A09R35W2N902765DE010 E3DLD1H\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	445.9
1°	445.3
2°	444.3
3°	442.2
4°	439.0
5°	434.8
6°	429.5
7°	424.2
8°	417.3
9°	410.4
10°	402.5
11°	394.0
12°	385.0
13°	375.0
14°	364.4
15°	354.4
17.5°	327.4
20°	299.9
22.5°	271.9
25°	246.5
27.5°	221.6
30°	197.3
32.5°	172.9
35°	148.6
37.5°	124.3
40°	100.5
42.5°	78.3
45°	58.7
47.5°	42.3
50°	29.1
52.5°	21.2
55°	18.0
57.5°	16.4
60°	14.8
62.5°	13.2
65°	11.6
67.5°	10.0
70°	9.0
72.5°	7.4
75°	5.8
77.5°	4.8
80°	3.7
82.5°	2.6
85°	1.6
87.5°	1.1



TEST NUMBER: P1293078  
CATALOG NUMBER: P3A09R35W2N902765DE010 E3DLD1H\_2700K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)