

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293209

Luminaire Tested: P3A09R40W2N902750DE010 E3D1WH_3500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1293209
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R40W2N902750DE010 E3D1WH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3500K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 829.0 lumens
Efficiency: N/A
Efficacy: 92.1 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1293209

CATALOG NUMBER: P3A09R40W2N902750DE010 E3D1WH_3500K

Luminous Intensity Polar Plot

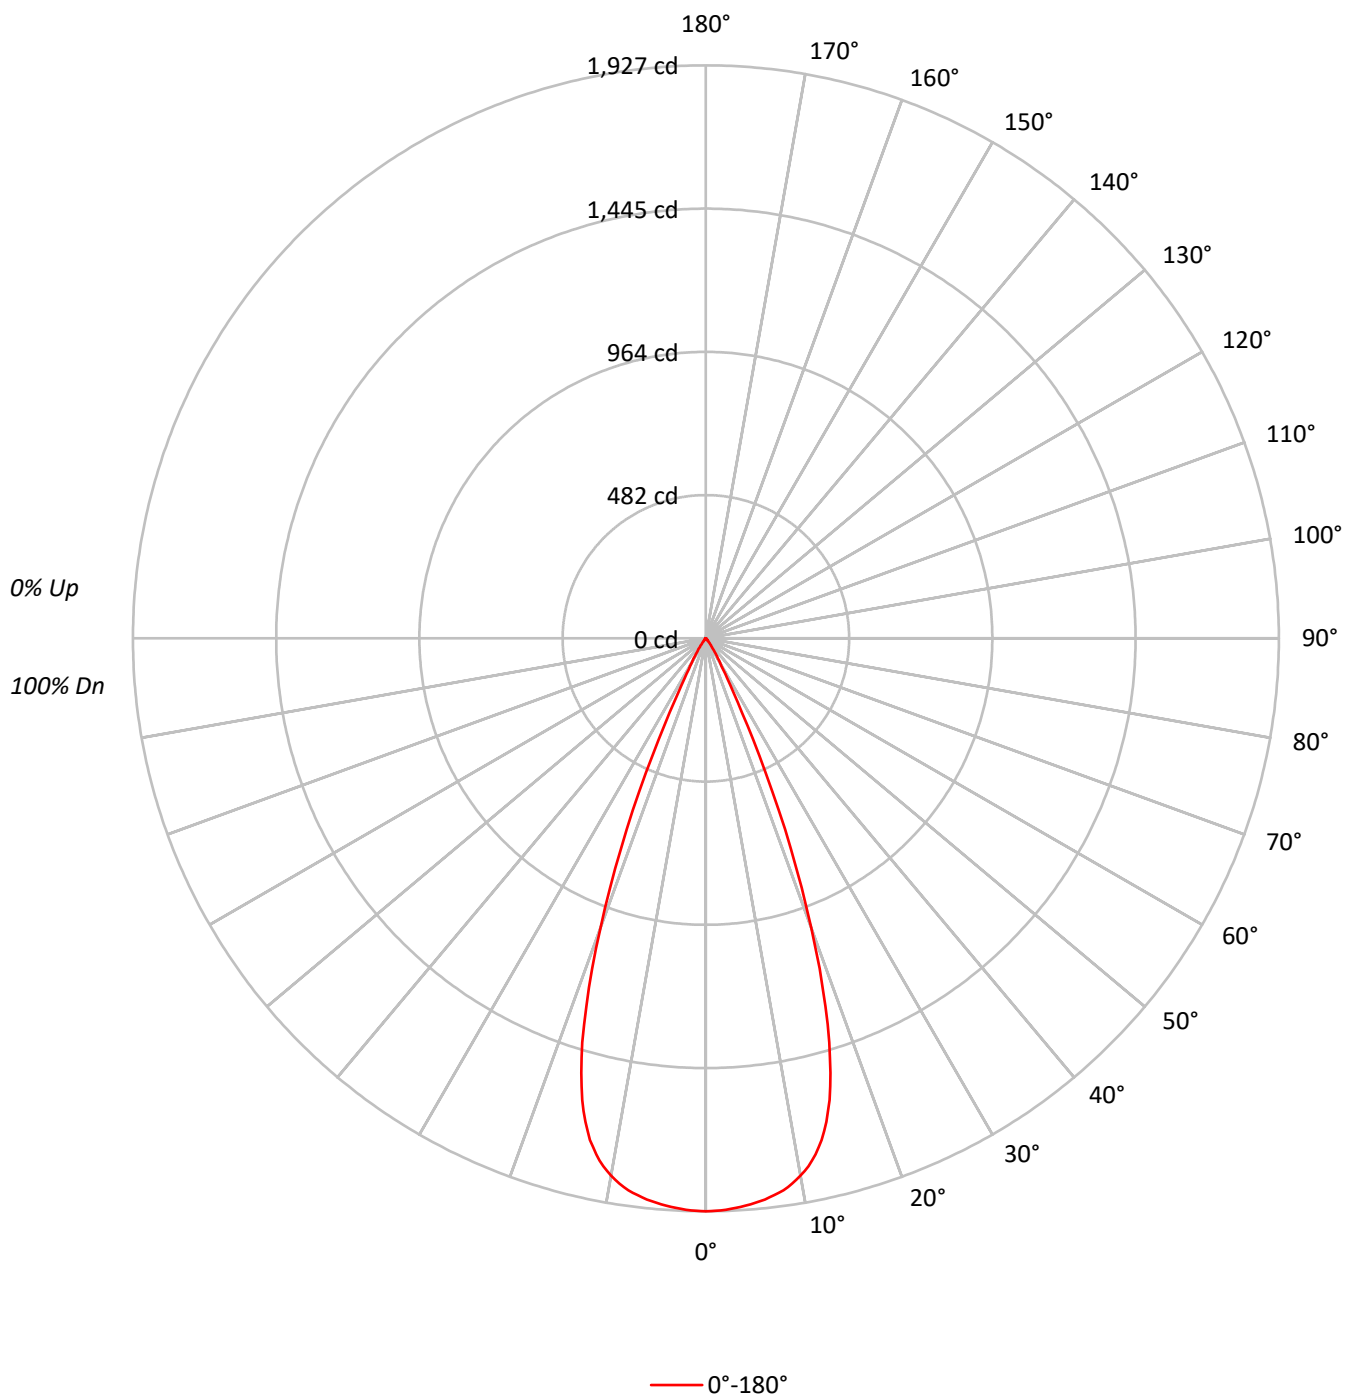



TEST NUMBER: P1293209

CATALOG NUMBER: P3A09R40W2N902750DE010 E3D1WH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	112	110	109		112	110	109	107		106	105	104		103	102	101		99	98	98
2	111	107	104	101		109	105	102	100		102	100	98		99	97	96		96	95	94
3	107	102	98	95		105	100	97	94		98	95	93		96	93	91		93	91	90
4	103	97	93	90		101	96	92	89		94	91	88		92	89	87		90	88	86
5	99	93	89	85		98	92	88	85		91	87	84		89	86	84		88	85	83
6	96	89	85	81		95	89	84	81		87	83	81		86	83	80		85	82	80
7	93	86	81	78		92	85	81	78		84	80	77		83	80	77		82	79	77
8	90	83	78	75		89	82	78	75		81	77	75		80	77	74		79	76	74
9	87	80	75	72		86	79	75	72		78	75	72		78	74	72		77	74	71
10	84	77	72	70		83	77	72	69		76	72	69		75	72	69		74	71	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	422554
5°	419501
10°	408521
15°	364928
20°	241964
25°	90658
30°	24257
35°	9476
40°	3406
45°	1613
50°	512
55°	229
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1613 cd/sqm

TEST NUMBER: P1293209

CATALOG NUMBER: P3A09R40W2N902750DE010 E3D1WH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.8	21.7
10°-20°	425.9	51.4
20°-30°	193.2	23.3
30°-40°	25.0	3.0
40°-50°	4.3	0.5
50°-60°	0.5	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	798.9	96.4
0°-40°	824.0	99.4
0°-60°	828.8	100.0
0°-90°	829.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	829.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1927	
5°	1906	180
15°	1608	426
25°	375	193
35°	35	25
45°	5	4
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1293209

CATALOG NUMBER: P3A09R40W2N902750DE010 E3D1WH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1927.0
1°	1925.9
2°	1923.0
3°	1918.6
4°	1913.1
5°	1905.8
6°	1897.4
7°	1887.0
8°	1874.2
9°	1856.8
10°	1834.7
11°	1808.9
12°	1774.4
13°	1731.7
14°	1676.0
15°	1607.5
16°	1520.1
17°	1420.6
18°	1301.0
19°	1174.8
20°	1036.9
21°	899.1
22°	763.3
23°	628.0
24°	495.1
25°	374.7
26°	277.4
27°	203.2
28°	152.7
29°	118.7
30°	95.8
31°	79.2
32°	66.2
32.5°	60.4
33°	54.6
34°	44.4
35°	35.4
36°	27.9
37°	22.1
37.5°	19.7
38°	17.4
39°	14.5
40°	11.9
42.5°	7.8
45°	5.2



TEST NUMBER: P1293209

CATALOG NUMBER: P3A09R40W2N902750DE010 E3D1WH_3500K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	3.2
50°	1.5
52.5°	0.6
55°	0.6
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)