

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293919

Luminaire Tested: P3A09R50W2N902765DE010 E3CD1MB\_2700K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1293919  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-32)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3A09R50W2N902765DE010 E3CD1MB\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,  
E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 723.0 lumens  
Efficiency: N/A  
Efficacy: 80.3 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1293919

CATALOG NUMBER: P3A09R50W2N902765DE010 E3CD1MB\_2700K

### Luminous Intensity Polar Plot

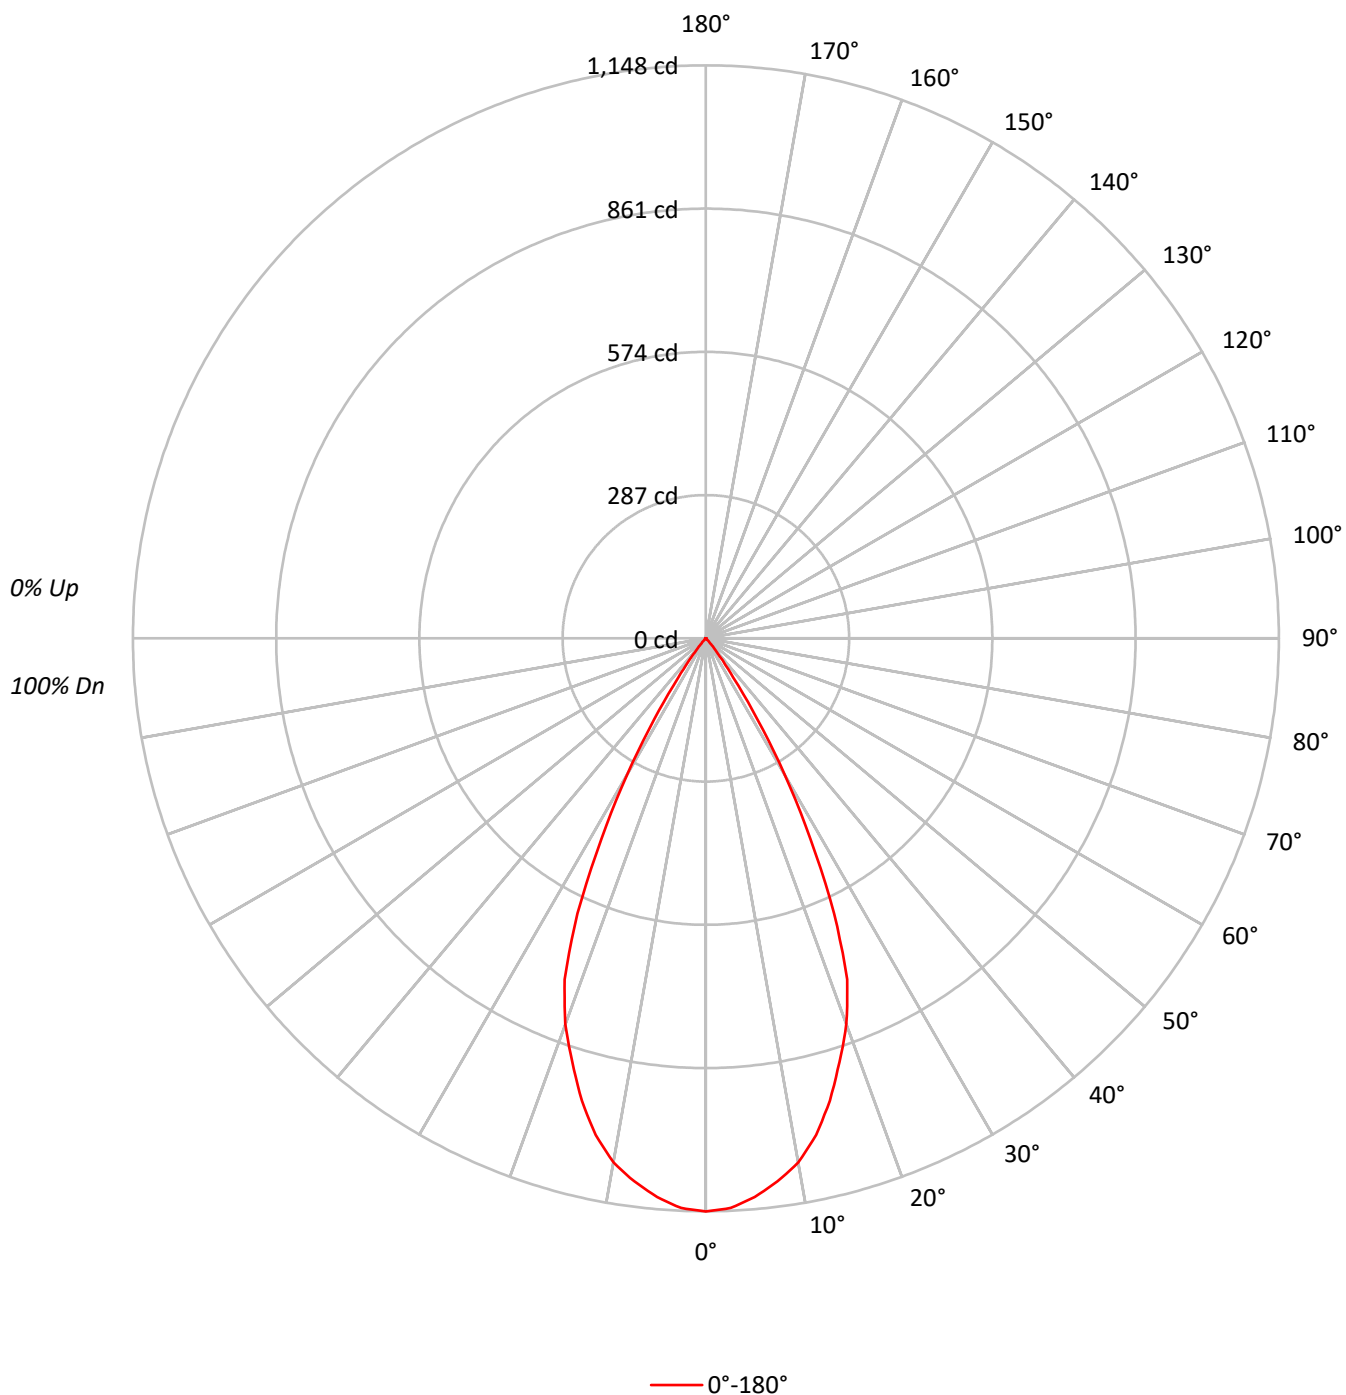

TEST NUMBER: P1293919

CATALOG NUMBER: P3A09R50W2N902765DE010 E3CD1MB\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1   | 114 | 112 | 109 | 107 | 112 | 109 | 107 | 106 | 105 | 104 | 102 | 102 | 101 | 99  | 98  | 97  | 97  | 97  | 97  | 95  |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 97  | 95  | 97  | 95  | 93  | 94  | 93  | 91  | 91  | 91  | 90  |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 88  | 86  | 86  | 86  | 85  |
| 4   | 100 | 94  | 89  | 85  | 99  | 92  | 88  | 85  | 90  | 87  | 84  | 88  | 85  | 83  | 87  | 84  | 82  | 82  | 82  | 80  |
| 5   | 96  | 89  | 84  | 80  | 94  | 88  | 83  | 79  | 86  | 82  | 79  | 84  | 81  | 78  | 83  | 80  | 77  | 77  | 77  | 76  |
| 6   | 92  | 84  | 79  | 75  | 91  | 83  | 79  | 75  | 82  | 78  | 74  | 81  | 77  | 74  | 79  | 76  | 73  | 73  | 73  | 72  |
| 7   | 88  | 80  | 75  | 71  | 87  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 70  | 76  | 73  | 70  | 70  | 70  | 69  |
| 8   | 85  | 76  | 71  | 67  | 83  | 76  | 71  | 67  | 75  | 70  | 67  | 74  | 70  | 67  | 73  | 69  | 66  | 66  | 66  | 65  |
| 9   | 81  | 73  | 68  | 64  | 80  | 72  | 67  | 64  | 71  | 67  | 64  | 71  | 66  | 63  | 70  | 66  | 63  | 63  | 63  | 62  |
| 10  | 78  | 69  | 64  | 61  | 77  | 69  | 64  | 61  | 68  | 64  | 61  | 68  | 63  | 61  | 67  | 63  | 60  | 60  | 60  | 59  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 251800 |
| 5°  | 247303 |
| 10° | 237448 |
| 15° | 217731 |
| 20° | 192003 |
| 25° | 147154 |
| 30° | 80012  |
| 35° | 25752  |
| 40° | 6040   |
| 45° | 806    |
| 50° | 716    |
| 55° | 803    |
| 60° | 702    |
| 65° | 830    |
| 70° | 705    |
| 75° | 932    |
| 80° | 631    |
| 85° | 1258   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 85°  
Luminance: 1258 cd/sqm

TEST NUMBER: P1293919

CATALOG NUMBER: P3A09R50W2N902765DE010 E3CD1MB\_2700K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 105.4  | 14.6      |
| 10°-20°   | 266.6  | 36.9      |
| 20°-30°   | 267.0  | 36.9      |
| 30°-40°   | 75.1   | 10.4      |
| 40°-50°   | 4.5    | 0.6       |
| 50°-60°   | 1.7    | 0.2       |
| 60°-70°   | 1.4    | 0.2       |
| 70°-80°   | 0.9    | 0.1       |
| 80°-90°   | 0.3    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 639.0  | 88.4      |
| 0°-40°    | 714.1  | 98.8      |
| 0°-60°    | 720.3  | 99.6      |
| 0°-90°    | 723.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 723.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1148 |      |
| 5°  | 1124 | 105  |
| 15° | 959  | 267  |
| 25° | 608  | 267  |
| 35° | 96   | 75   |
| 45° | 3    | 5    |
| 55° | 2    | 2    |
| 65° | 2    | 1    |
| 75° | 1    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1293919

CATALOG NUMBER: P3A09R50W2N902765DE010 E3CD1MB\_2700K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1148.3 |
| 2.5°  | 1142.5 |
| 5°    | 1123.5 |
| 7.5°  | 1097.6 |
| 10°   | 1066.4 |
| 12.5° | 1019.4 |
| 15°   | 959.1  |
| 17.5° | 889.9  |
| 20°   | 822.8  |
| 22.5° | 739.3  |
| 25°   | 608.2  |
| 27.5° | 452.9  |
| 30°   | 316.0  |
| 32.5° | 190.8  |
| 35°   | 96.2   |
| 37.5° | 45.4   |
| 40°   | 21.1   |
| 42.5° | 7.9    |
| 45°   | 2.6    |
| 47.5° | 2.1    |
| 50°   | 2.1    |
| 52.5° | 2.1    |
| 55°   | 2.1    |
| 57.5° | 1.6    |
| 60°   | 1.6    |
| 62.5° | 1.6    |
| 65°   | 1.6    |
| 67.5° | 1.1    |
| 70°   | 1.1    |
| 72.5° | 1.1    |
| 75°   | 1.1    |
| 77.5° | 0.5    |
| 80°   | 0.5    |
| 82.5° | 0.5    |
| 85°   | 0.5    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)