

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294078

Luminaire Tested: P3A09R55W2N902750DE010 E3CB1MB_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1294078
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3A09R55W2N902750DE010 E3CB1MB_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 4000K CCT AND, 90CRI ,
E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 787.0 lumens
Efficiency: N/A
Efficacy: 87.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1294078

CATALOG NUMBER: P3A09R55W2N902750DE010 E3CB1MB_4000K

Luminous Intensity Polar Plot

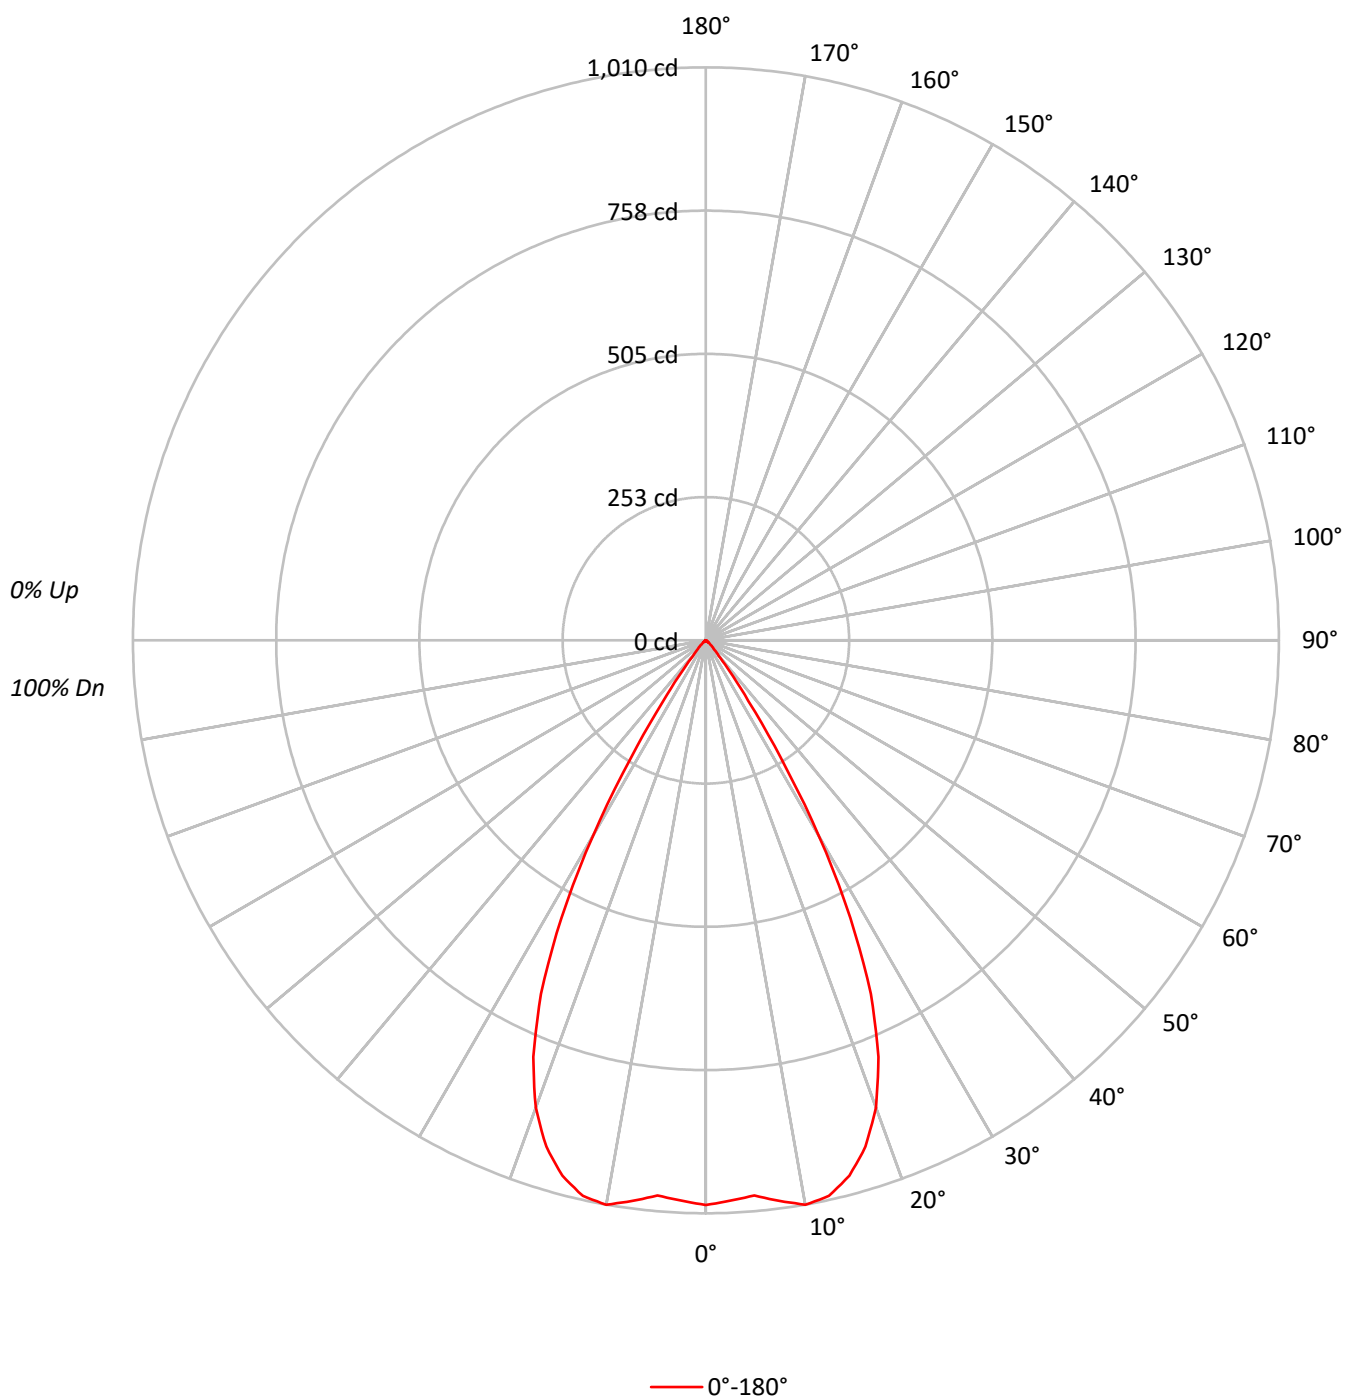



TEST NUMBER: P1294078

CATALOG NUMBER: P3A09R55W2N902750DE010 E3CB1MB_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	114	111	109	107		112	109	107	105		105	104	102		101	100	99		98	97	96		94			
2	109	104	101	98		107	103	99	96		100	97	94		97	94	92		94	92	90		89			
3	104	98	94	90		102	97	93	89		94	91	88		92	89	86		90	87	85		84			
4	99	92	87	84		98	91	87	83		89	85	82		87	84	81		85	83	80		79			
5	95	87	82	78		93	86	81	78		85	80	77		83	79	76		82	78	76		74			
6	91	83	77	73		89	82	77	73		80	76	72		79	75	72		78	74	72		70			
7	87	78	73	69		85	78	72	69		76	72	68		75	71	68		74	70	68		66			
8	83	74	69	65		82	74	68	65		73	68	65		72	67	64		71	67	64		63			
9	79	71	65	61		78	70	65	61		69	64	61		68	64	61		68	64	61		60			
10	76	67	62	58		75	67	62	58		66	61	58		65	61	58		65	61	58		57			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	218272
5°	216244
10°	224935
15°	221817
20°	204534
25°	166437
30°	101079
35°	34987
40°	9990
45°	4776
50°	2013
55°	918
60°	1053
65°	934
70°	769
75°	1017
80°	758
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4776 cd/sqm

TEST NUMBER: P1294078

CATALOG NUMBER: P3A09R55W2N902750DE010 E3CB1MB_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.0	12.1
10°-20°	271.6	34.5
20°-30°	302.7	38.5
30°-40°	99.0	12.6
40°-50°	13.1	1.7
50°-60°	2.8	0.4
60°-70°	1.6	0.2
70°-80°	1.0	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	669.3	85.0
0°-40°	768.3	97.6
0°-60°	784.1	99.6
0°-90°	787.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	787.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	995	
5°	982	95
15°	977	272
25°	688	303
35°	131	99
45°	15	13
55°	2	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1294078

CATALOG NUMBER: P3A09R55W2N902750DE010 E3CB1MB_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	995.4
2.5°	988.3
5°	982.4
7.5°	996.6
10°	1010.2
12.5°	1003.1
15°	977.1
17.5°	935.7
20°	876.5
22.5°	794.9
25°	687.9
27.5°	551.8
30°	399.2
32.5°	244.9
35°	130.7
37.5°	66.2
40°	34.9
42.5°	22.5
45°	15.4
47.5°	10.6
50°	5.9
52.5°	3.5
55°	2.4
57.5°	2.4
60°	2.4
62.5°	1.8
65°	1.8
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)