

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1303061

Luminaire Tested: P3DUS20R209024D010 E3CBUS1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1303061  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-86)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3DUS20R209024D010 E3CBUS1MW  
Description: 3in Adjustable LED luminaire with, R20 optic, 2400K CCT AND, 90CRI , E3CBUS1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2013.0 lumens  
Efficiency: N/A  
Efficacy: 69.9 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.33  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1303061  
CATALOG NUMBER: P3DUS20R209024D010 E3CBUS1MW

### Luminous Intensity Polar Plot

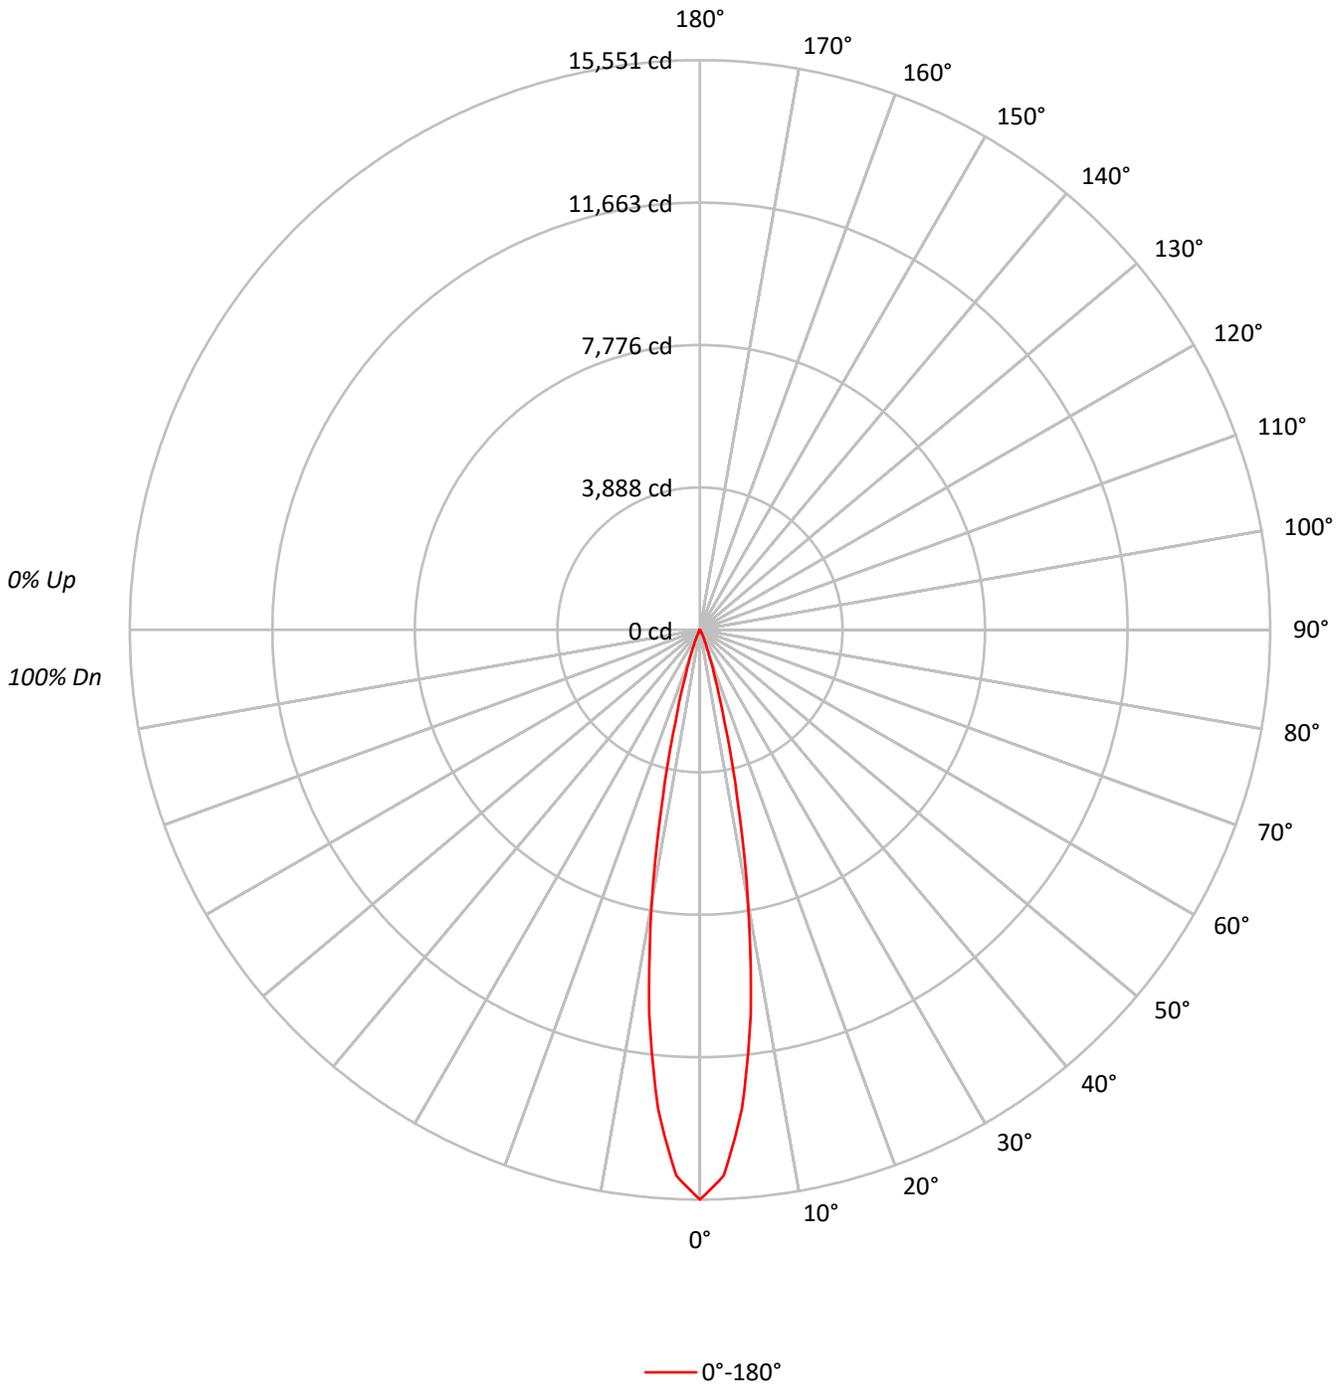



TEST NUMBER: P1303061  
 CATALOG NUMBER: P3DUS20R209024D010 E3CBUS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	100	100	100	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	97	98	97	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	95	98	96	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	93	96	95	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	91	95	93	91
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	90	93	91	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	88	92	90	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	87	91	88	86
9	97	92	88	86	96	91	88	86	90	88	86	90	87	85	89	87	85	85	89	87	84
10	95	90	87	85	95	90	86	84	89	86	84	88	86	84	88	86	84	84	88	86	83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3410034
5°	2889251
10°	1680485
15°	577007
20°	166218
25°	50930
30°	13926
35°	7790
40°	3721
45°	992
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 992 cd/sqm



TEST NUMBER: P1303061

CATALOG NUMBER: P3DUS20R209024D010 E3CBUS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1074.5	53.4
10°-20°	799.7	39.7
20°-30°	117.2	5.8
30°-40°	18.6	0.9
40°-50°	3.0	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1991.4	98.9
0°-40°	2010.0	99.9
0°-60°	2013.0	100.0
0°-90°	2013.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2013.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15551	
5°	13126	###
15°	2542	800
25°	210	117
35°	29	19
45°	3	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1303061  
CATALOG NUMBER: P3DUS20R209024D010 E3CBUS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	15551.0
2.5°	14909.9
5°	13125.9
7.5°	10590.8
10°	7547.2
12.5°	4685.1
15°	2541.7
17.5°	1314.5
20°	712.3
22.5°	391.8
25°	210.5
27.5°	100.4
30°	55.0
32.5°	38.9
35°	29.1
37.5°	19.4
40°	13.0
42.5°	6.5
45°	3.2
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)