

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1303416

Luminaire Tested: P3DUS24R359030D010 E3CBUS1MW

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1303416  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-89)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3DUS24R359030D010 E3CBUS1MW  
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3CBUS1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2664.0 lumens  
Efficiency: N/A  
Efficacy: 92.5 lumens/watt  
Spacing Criteria (0/90/45): 0.55 / 0.55 / 0.5  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1303416

CATALOG NUMBER: P3DUS24R359030D010 E3CBUS1MW

### Luminous Intensity Polar Plot

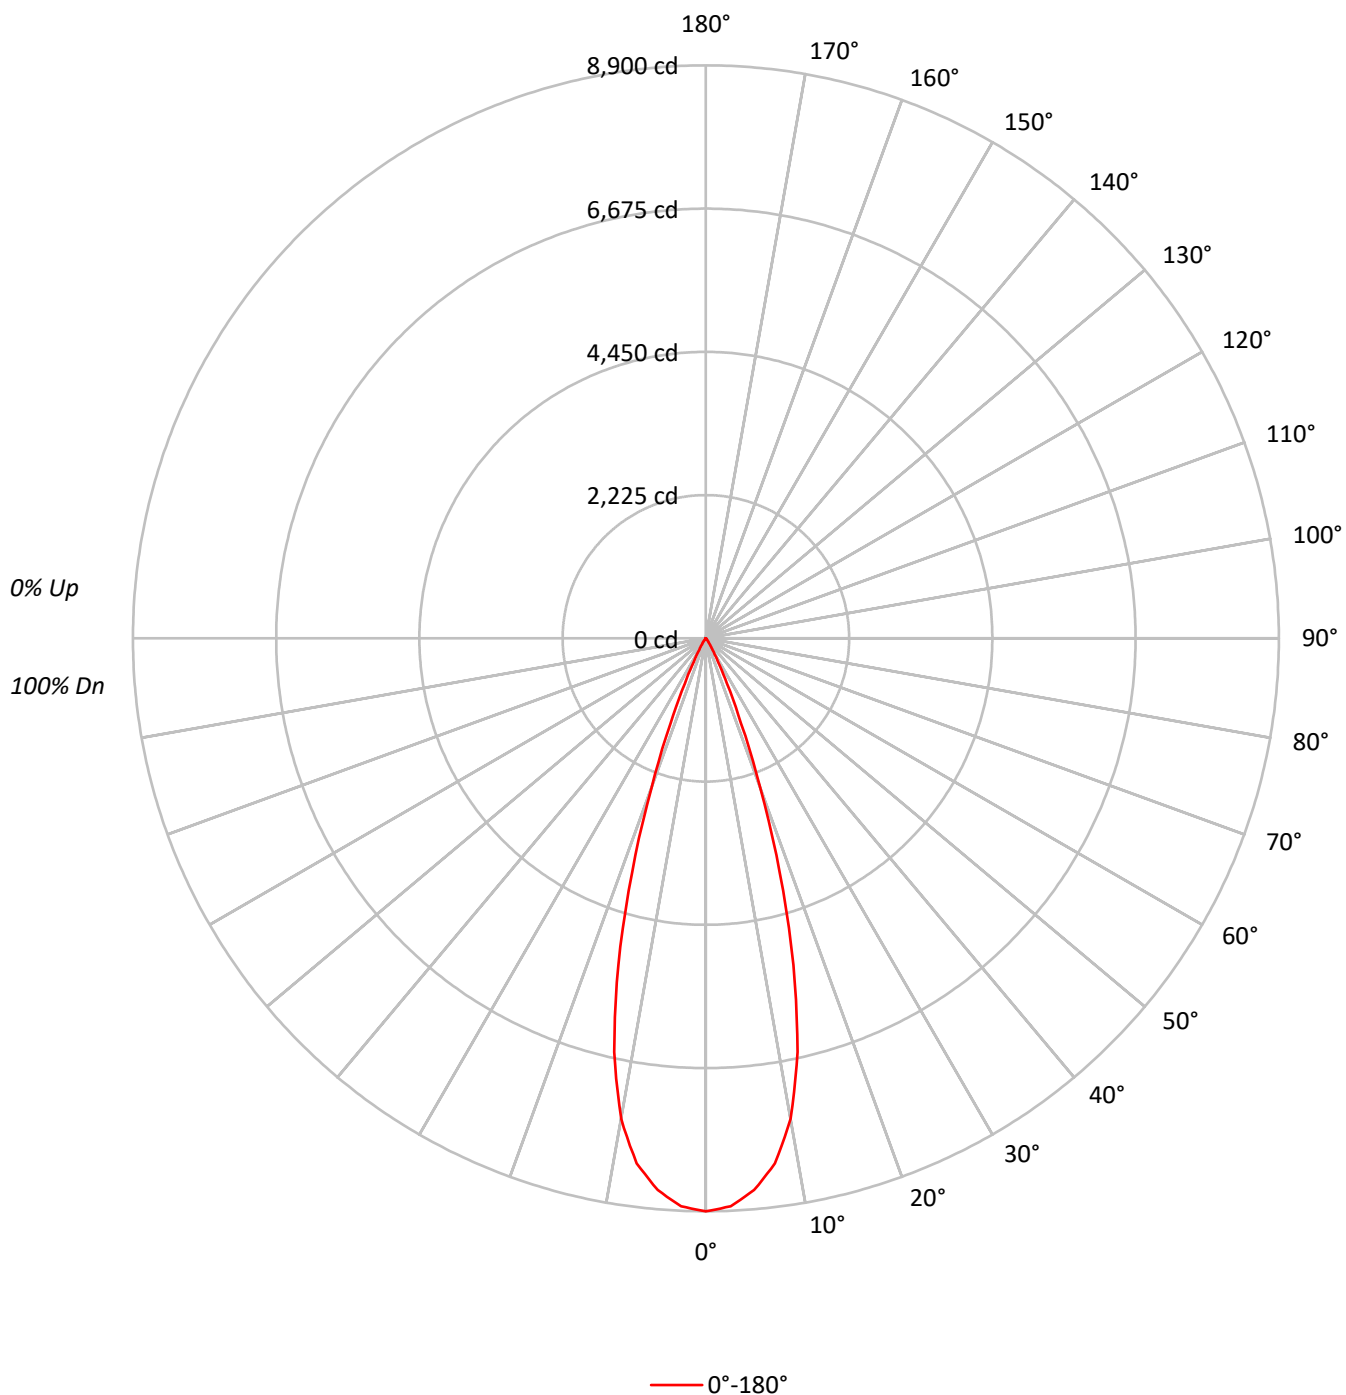

TEST NUMBER: P1303416

CATALOG NUMBER: P3DUS24R359030D010 E3CBUS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 115 | 113 | 111 | 109 | 113 | 111 | 109 | 108 | 107 | 105 | 104 |  | 103 | 102 | 101 |  | 100 |
| 2   | 111 | 108 | 105 | 102 | 109 | 106 | 103 | 101 | 103 | 101 | 99  |  | 100 | 98  | 97  |  | 97  |
| 3   | 108 | 103 | 99  | 97  | 106 | 102 | 98  | 96  | 99  | 97  | 94  |  | 97  | 95  | 93  |  | 95  |
| 4   | 104 | 99  | 95  | 92  | 103 | 98  | 94  | 92  | 96  | 93  | 90  |  | 94  | 92  | 89  |  | 92  |
| 5   | 101 | 95  | 91  | 88  | 100 | 94  | 91  | 88  | 93  | 90  | 87  |  | 91  | 89  | 86  |  | 90  |
| 6   | 98  | 92  | 88  | 85  | 97  | 91  | 87  | 85  | 90  | 87  | 84  |  | 89  | 86  | 83  |  | 88  |
| 7   | 95  | 89  | 85  | 82  | 94  | 88  | 84  | 82  | 87  | 84  | 81  |  | 86  | 83  | 81  |  | 85  |
| 8   | 93  | 86  | 82  | 79  | 92  | 86  | 82  | 79  | 85  | 81  | 79  |  | 84  | 81  | 78  |  | 83  |
| 9   | 90  | 83  | 79  | 77  | 89  | 83  | 79  | 76  | 82  | 79  | 76  |  | 82  | 78  | 76  |  | 81  |
| 10  | 88  | 81  | 77  | 74  | 87  | 81  | 77  | 74  | 80  | 76  | 74  |  | 79  | 76  | 74  |  | 79  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1951554 |
| 5°  | 1893348 |
| 10° | 1688279 |
| 15° | 1192674 |
| 20° | 575287  |
| 25° | 186470  |
| 30° | 52464   |
| 35° | 21067   |
| 40° | 5925    |
| 45° | 0       |
| 50° | 0       |
| 55° | 0       |
| 60° | 0       |
| 65° | 0       |
| 70° | 0       |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 0 cd/sqm

TEST NUMBER: P1303416

CATALOG NUMBER: P3DUS24R359030D010 E3CBUS1MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 789.9  | 29.7      |
| 10°-20°   | 1388.5 | 52.1      |
| 20°-30°   | 426.7  | 16.0      |
| 30°-40°   | 55.5   | 2.1       |
| 40°-50°   | 3.4    | 0.1       |
| 50°-60°   | 0.0    | 0.0       |
| 60°-70°   | 0.0    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 2605.1 | 97.8      |
| 0°-40°    | 2660.6 | 99.9      |
| 0°-60°    | 2664.0 | 100.0     |
| 0°-90°    | 2664.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2664.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 8900 |      |
| 5°  | 8602 | 790  |
| 15° | 5254 | 1388 |
| 25° | 771  | 427  |
| 35° | 79   | 55   |
| 45° | 0    | 3    |
| 55° | 0    | 0    |
| 65° | 0    | 0    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1303416

CATALOG NUMBER: P3DUS24R359030D010 E3CBUS1MW

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 8899.8 |
| 2.5°  | 8829.4 |
| 5°    | 8601.5 |
| 7.5°  | 8224.4 |
| 10°   | 7582.2 |
| 12.5° | 6579.6 |
| 15°   | 5253.7 |
| 17.5° | 3811.8 |
| 20°   | 2465.3 |
| 22.5° | 1429.4 |
| 25°   | 770.7  |
| 27.5° | 406.0  |
| 30°   | 207.2  |
| 32.5° | 124.3  |
| 35°   | 78.7   |
| 37.5° | 49.7   |
| 40°   | 20.7   |
| 42.5° | 8.3    |
| 45°   | 0.0    |
| 47.5° | 0.0    |
| 50°   | 0.0    |
| 52.5° | 0.0    |
| 55°   | 0.0    |
| 57.5° | 0.0    |
| 60°   | 0.0    |
| 62.5° | 0.0    |
| 65°   | 0.0    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)