

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1304332

Luminaire Tested: P3DUS05R509735DE010 E3CBUS1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1304332  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-91)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3DUS05R509735DE010 E3CBUS1MW  
Description: 3in Adjustable LED luminaire with, R50 optic, 3500K CCT AND, 97CRI , E3CBUS1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 677.0 lumens  
Efficiency: N/A  
Efficacy: 94.0 lumens/watt  
Spacing Criteria (0/90/45): 0.71 / 0.71 / 0.72  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1304332  
CATALOG NUMBER: P3DUS05R509735DE010 E3CBUS1MW

### Luminous Intensity Polar Plot

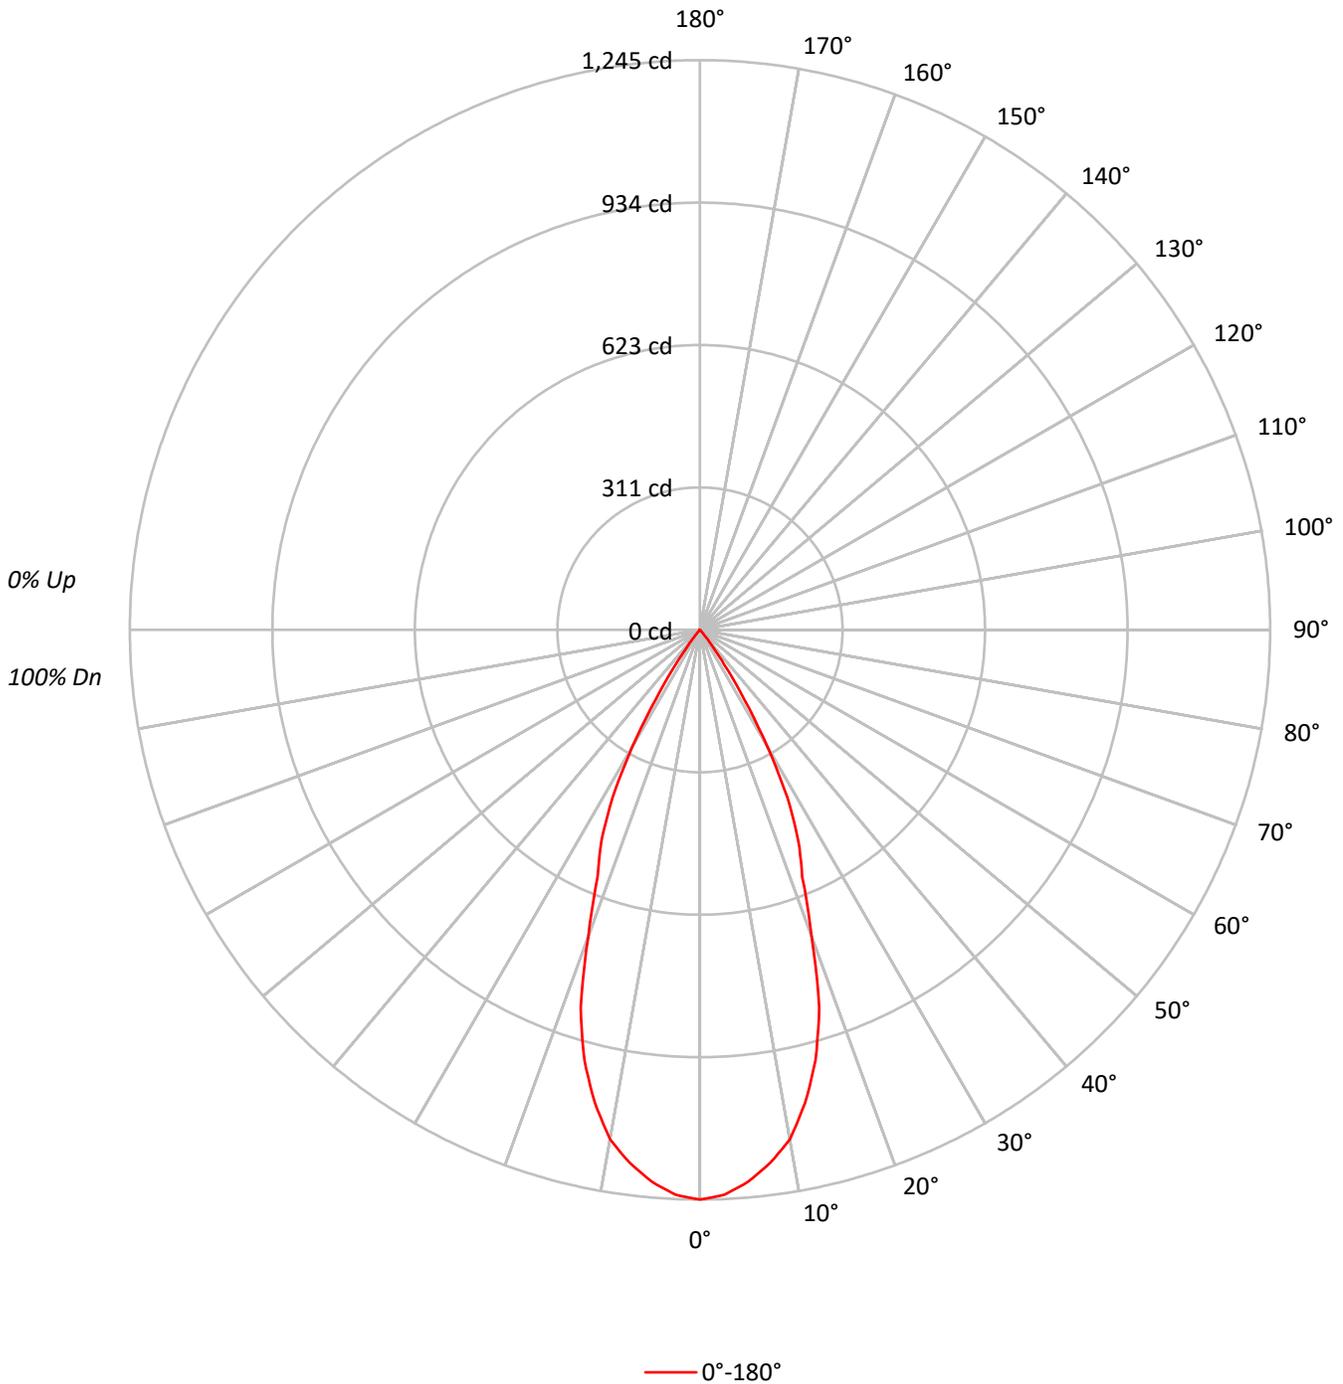



TEST NUMBER: P1304332  
 CATALOG NUMBER: P3DUS05R509735DE010 E3CBUS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	97	97	97	95
2	110	105	102	99	108	104	101	98	101	98	96	98	96	94	95	93	92	92	92	92	90
3	105	100	95	92	103	98	94	91	96	93	90	93	91	89	91	89	87	87	87	87	86
4	101	95	90	86	99	93	89	86	91	88	85	89	86	84	88	85	83	83	83	83	82
5	97	90	85	81	95	89	84	81	87	83	80	86	82	79	84	81	79	79	79	79	78
6	93	85	80	77	92	85	80	76	83	79	76	82	78	75	81	78	75	75	75	75	74
7	89	81	76	73	88	81	76	73	80	75	72	79	75	72	77	74	72	72	72	72	70
8	86	78	73	69	85	77	72	69	76	72	69	75	71	69	74	71	68	68	68	68	67
9	83	74	69	66	82	74	69	66	73	69	66	72	68	65	71	68	65	65	65	65	64
10	79	71	66	63	79	71	66	63	70	66	63	69	65	63	69	65	62	62	62	62	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	272939
5°	266409
10°	251676
15°	221182
20°	166381
25°	123007
30°	74619
35°	24681
40°	4351
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 0 cd/sqm



TEST NUMBER: P1304332  
 CATALOG NUMBER: P3DUS05R509735DE010 E3CBUS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	113.0	16.7
10°-20°	265.0	39.1
20°-30°	227.2	33.6
30°-40°	70.1	10.4
40°-50°	1.7	0.3
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	605.2	89.4
0°-40°	675.2	99.7
0°-60°	677.0	100.0
0°-90°	677.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	677.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1245	
5°	1210	113
15°	974	265
25°	508	227
35°	92	70
45°	0	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1304332  
CATALOG NUMBER: P3DUS05R509735DE010 E3CBUS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1244.7
2.5°	1235.6
5°	1210.3
7.5°	1174.8
10°	1130.3
12.5°	1059.4
15°	974.3
17.5°	865.9
20°	713.0
22.5°	583.4
25°	508.4
27.5°	413.2
30°	294.7
32.5°	179.3
35°	92.2
37.5°	41.5
40°	15.2
42.5°	2.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)