

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1304974

Luminaire Tested: P3DUS09R25B2750DE010 E3CBUS1MW_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1304974
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-87)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3DUS09R25B2750DE010 E3CBUS1MW_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3CBUS1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 792.0 lumens
Efficiency: N/A
Efficacy: 60.5 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.39
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1304974
CATALOG NUMBER: P3DUS09R25B2750DE010 E3CBUS1MW_3000K

Luminous Intensity Polar Plot

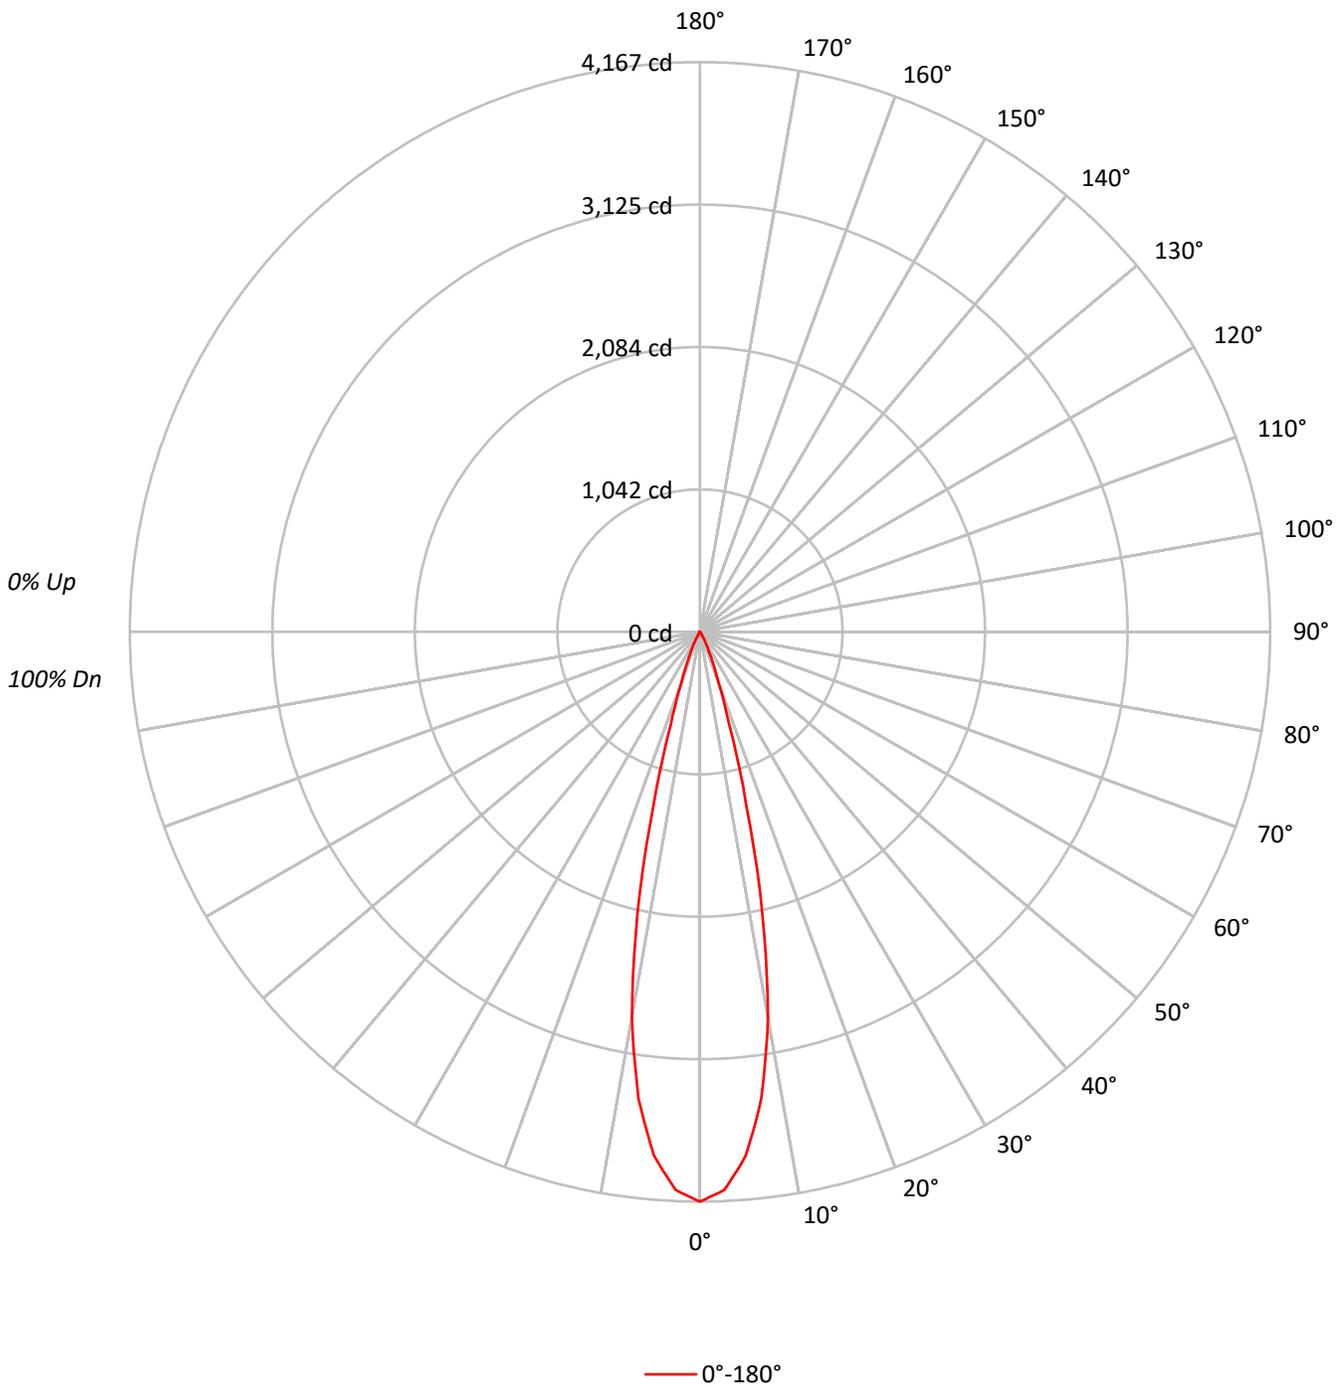



TEST NUMBER: P1304974

CATALOG NUMBER: P3DUS09R25B2750DE010 E3CBUS1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	97
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	96	95
2	112	109	106	104	110	107	105	103	104	102	100	101	100	98	99	97	96	95	95	94	92
3	109	105	101	99	107	103	100	98	101	99	97	99	97	95	97	95	94	92	92	91	90
4	106	101	98	95	105	100	97	94	98	95	93	96	94	92	95	93	91	89	88	86	84
5	103	98	94	92	102	97	94	91	96	93	90	94	92	90	93	91	89	88	86	84	82
6	101	95	91	89	100	95	91	88	93	90	88	92	89	87	91	89	87	86	84	82	80
7	98	93	89	86	97	92	89	86	91	88	86	90	87	85	89	87	85	84	82	80	79
8	96	90	87	84	95	90	86	84	89	86	84	88	85	83	87	85	83	82	80	79	78
9	94	88	84	82	93	88	84	82	87	84	82	86	83	81	86	83	81	80	79	78	77
10	92	86	83	80	91	86	82	80	85	82	80	84	82	80	84	81	80	79	78	77	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	913655
5°	846311
10°	637263
15°	296165
20°	93201
25°	36050
30°	10457
35°	3346
40°	1088
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 0 cd/sqm



TEST NUMBER: P1304974

CATALOG NUMBER: P3DUS09R25B2750DE010 E3CBUS1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	335.9	42.4
10°-20°	370.2	46.7
20°-30°	76.0	9.6
30°-40°	9.2	1.2
40°-50°	0.6	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	782.2	98.8
0°-40°	791.4	99.9
0°-60°	792.0	100.0
0°-90°	792.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	792.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4167	
5°	3845	336
15°	1305	370
25°	149	76
35°	12	9
45°	0	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1304974
CATALOG NUMBER: P3DUS09R25B2750DE010 E3CBUS1MW_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	4166.6
2.5°	4086.5
5°	3844.8
7.5°	3440.5
10°	2862.0
12.5°	2108.3
15°	1304.6
17.5°	709.9
20°	399.4
22.5°	244.1
25°	149.0
27.5°	83.9
30°	41.3
32.5°	18.8
35°	12.5
37.5°	7.5
40°	3.8
42.5°	1.3
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)