

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1305597

Luminaire Tested: P3SQAS05R309024DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1305597
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R309024DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 2400K CCT AND, 90CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 512.0 lumens
Efficiency: N/A
Efficacy: 71.1 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1305597

CATALOG NUMBER: P3SQAS05R309024DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

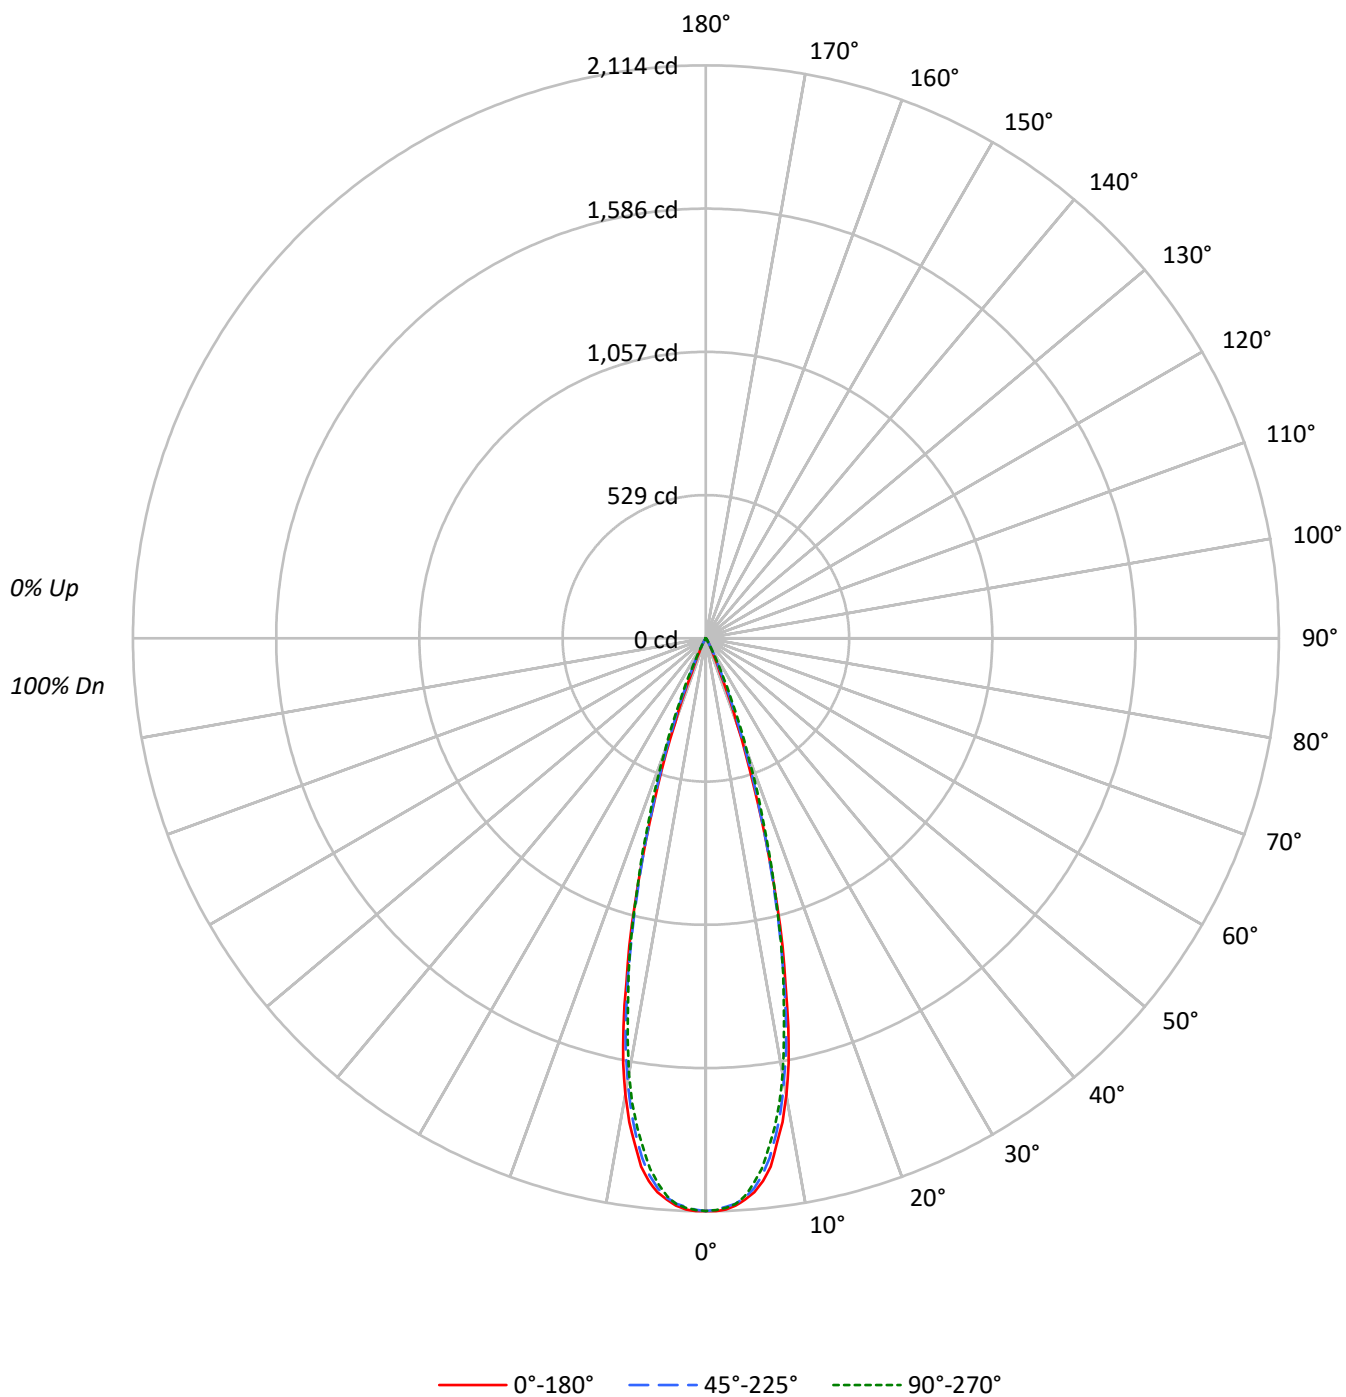

TEST NUMBER: P1305597

CATALOG NUMBER: P3SQAS05R309024DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100	99	99		97
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98	97	96		94
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96	94	93		92
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94	92	90		89
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92	89	88		87
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90	87	85		84
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88	85	83		82
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86	83	81		80
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84	81	79		78
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82	79	77		76

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	363906	363906	363906
5°	354543	352106	349201
10°	299201	290020	285316
15°	180313	175267	178494
20°	61159	70634	81466
25°	11231	17615	20808
30°	3858	4295	4832
35°	1114	1388	1493
40°	292	495	405
45°	97	97	97
50°	107	0	107
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 113 cd/sqm

TEST NUMBER: P1305597

CATALOG NUMBER: P3SQAS05R309024DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.7	35.7
10°-20°	267.0	52.2
20°-30°	56.5	11.0
30°-40°	5.2	1.0
40°-50°	0.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	506.3	98.9
0°-40°	511.5	99.9
0°-60°	512.0	100.0
0°-90°	512.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	512.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2113	2113	2113	2113	2113	
5°	2051	2047	2037	2030	2020	185
15°	1011	1008	983	1006	1001	267
25°	59	66	93	109	110	43
35°	5	7	7	8	7	4
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1305597

CATALOG NUMBER: P3SQAS05R309024DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2113.0	2113.0	2113.0	2113.0	2113.0
1°	2113.5	2111.3	2108.2	2112.6	2109.5
2°	2109.1	2103.8	2099.4	2103.8	2102.5
3°	2095.8	2091.4	2088.3	2090.5	2090.5
4°	2076.0	2071.1	2068.5	2068.9	2062.3
5°	2050.8	2046.8	2036.7	2030.5	2019.9
6°	2013.7	2004.0	1991.7	1981.5	1967.8
7°	1963.4	1948.4	1930.7	1913.1	1895.9
8°	1882.6	1875.6	1851.7	1839.8	1822.6
9°	1806.7	1789.5	1763.9	1744.5	1735.2
10°	1710.9	1685.3	1658.4	1642.9	1631.5
11°	1597.5	1571.4	1549.8	1527.3	1509.6
12°	1464.2	1442.1	1417.4	1402.4	1381.6
13°	1306.1	1303.1	1275.2	1270.4	1267.7
14°	1170.6	1158.3	1130.9	1138.4	1140.2
15°	1011.3	1007.7	983.0	1006.0	1001.1
17.5°	633.4	634.8	650.2	686.4	697.9
20°	333.7	343.9	385.4	429.1	444.5
22.5°	135.1	157.6	200.0	229.5	249.4
25°	59.1	66.2	92.7	109.0	109.5
27.5°	33.5	34.0	44.6	46.3	47.2
30°	19.4	19.9	21.6	23.0	24.3
32.5°	10.6	11.5	11.9	13.7	13.7
35°	5.3	6.6	6.6	7.9	7.1
37.5°	3.1	3.5	4.0	4.0	3.5
40°	1.3	1.8	2.2	2.2	1.8
42.5°	0.4	0.9	0.9	0.9	1.3
45°	0.4	0.4	0.4	0.4	0.4
47.5°	0.4	0.4	0.0	0.4	0.4
50°	0.4	0.0	0.0	0.0	0.4
52.5°	0.4	0.0	0.0	0.0	0.4
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1305597

CATALOG NUMBER: P3SQAS05R309024DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)