

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1306480

Luminaire Tested: P3SQAS02R709027DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1306480
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R709027DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R70 optic, 2700K CCT AND, 90CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 269.0 lumens
Efficiency: N/A
Efficacy: 74.7 lumens/watt
Spacing Criteria (0/90/45): 1 / 0.99 / 1.03
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1306480

CATALOG NUMBER: P3SQAS02R709027DE010 E3SQCD1MB

Luminous Intensity Polar Plot

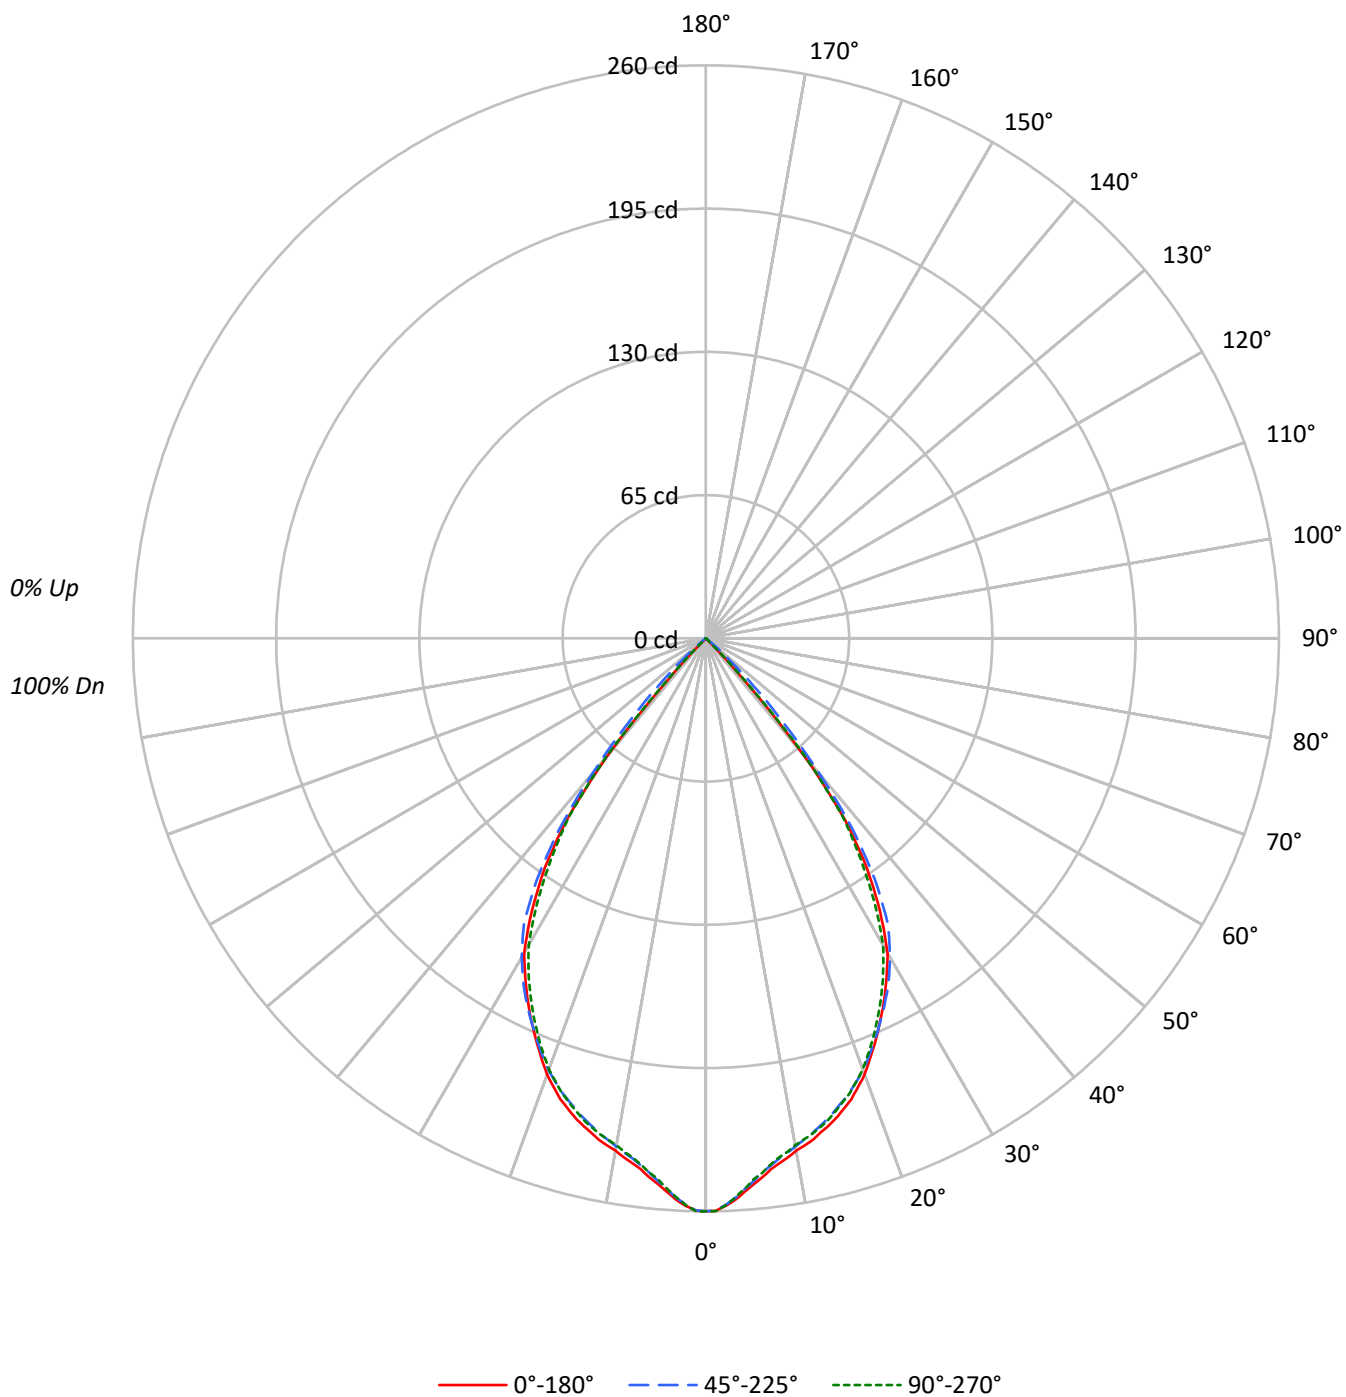

TEST NUMBER: P1306480

CATALOG NUMBER: P3SQAS02R709027DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86		
3	102	95	90	86	100	94	89	85	91	87	84	89	86	83	87	84	81	80		
4	96	89	83	79	95	88	82	78	85	81	77	83	79	76	81	78	75	74		
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	68		
6	86	77	71	67	85	76	71	66	75	70	66	73	69	65	72	68	65	63		
7	82	72	66	62	80	71	66	61	70	65	61	69	64	61	68	64	60	59		
8	78	68	61	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55		
9	74	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51		
10	70	60	54	50	69	59	53	50	58	53	49	58	53	49	57	52	49	48		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	44778	44778	44778
5°	42978	42753	42632
10°	41289	40939	40852
15°	40313	39743	39832
20°	38598	38231	38140
25°	35839	35915	35364
30°	32793	33250	31978
35°	26827	28131	25776
40°	15445	18008	15850
45°	219	7477	779
50°	0	804	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 7477 cd/sqm

TEST NUMBER: P1306480

CATALOG NUMBER: P3SQAS02R709027DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.2	8.6
10°-20°	62.9	23.4
20°-30°	86.4	32.1
30°-40°	78.3	29.1
40°-50°	18.2	6.8
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	172.4	64.1
0°-40°	250.7	93.2
0°-60°	269.0	100.0
0°-90°	269.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	269.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	260	260	260	260	260	
5°	249	248	247	247	247	23
15°	226	224	223	223	223	63
25°	189	190	189	187	186	87
35°	128	129	134	128	123	77
45°	1	10	31	13	3	11
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1306480

CATALOG NUMBER: P3SQAS02R709027DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	260.0	260.0	260.0	260.0	260.0
1°	259.8	259.3	259.6	259.8	260.0
2°	257.7	257.3	257.3	257.5	257.5
3°	255.2	254.3	254.3	254.1	254.1
4°	251.8	251.1	250.7	250.5	250.5
5°	248.6	248.0	247.3	246.8	246.6
6°	245.9	244.8	243.9	243.6	243.9
7°	242.7	242.0	241.1	240.4	240.7
8°	240.4	239.5	238.4	237.9	237.9
9°	238.4	237.5	236.4	235.4	235.9
10°	236.1	235.2	234.1	233.4	233.6
11°	234.5	233.4	232.0	231.6	231.8
12°	232.7	231.3	230.0	229.8	230.2
13°	230.4	229.1	227.7	227.7	228.2
14°	228.4	226.8	225.4	225.4	226.1
15°	226.1	224.5	222.9	222.9	223.4
17.5°	219.3	217.9	216.3	216.3	216.6
20°	210.6	210.0	208.6	207.9	208.1
22.5°	199.7	199.7	199.0	197.9	197.5
25°	188.6	189.5	189.0	187.2	186.1
27.5°	177.0	178.6	178.8	176.1	174.0
30°	164.9	166.3	167.2	164.0	160.8
32.5°	147.2	151.3	153.6	149.2	142.6
35°	127.6	129.4	133.8	128.1	122.6
37.5°	103.7	106.0	109.6	105.1	101.9
40°	68.7	77.8	80.1	77.8	70.5
42.5°	24.8	43.7	52.5	44.6	29.1
45°	0.9	10.2	30.7	13.2	3.2
47.5°	0.0	0.2	13.9	0.5	0.0
50°	0.0	0.0	3.0	0.0	0.0
52.5°	0.0	0.0	0.2	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1306480

CATALOG NUMBER: P3SQAS02R709027DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)