

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1306569

Luminaire Tested: P3SQAS05R309027DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1306569
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R309027DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 90CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 542.0 lumens
Efficiency: N/A
Efficacy: 75.3 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1306569

CATALOG NUMBER: P3SQAS05R309027DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

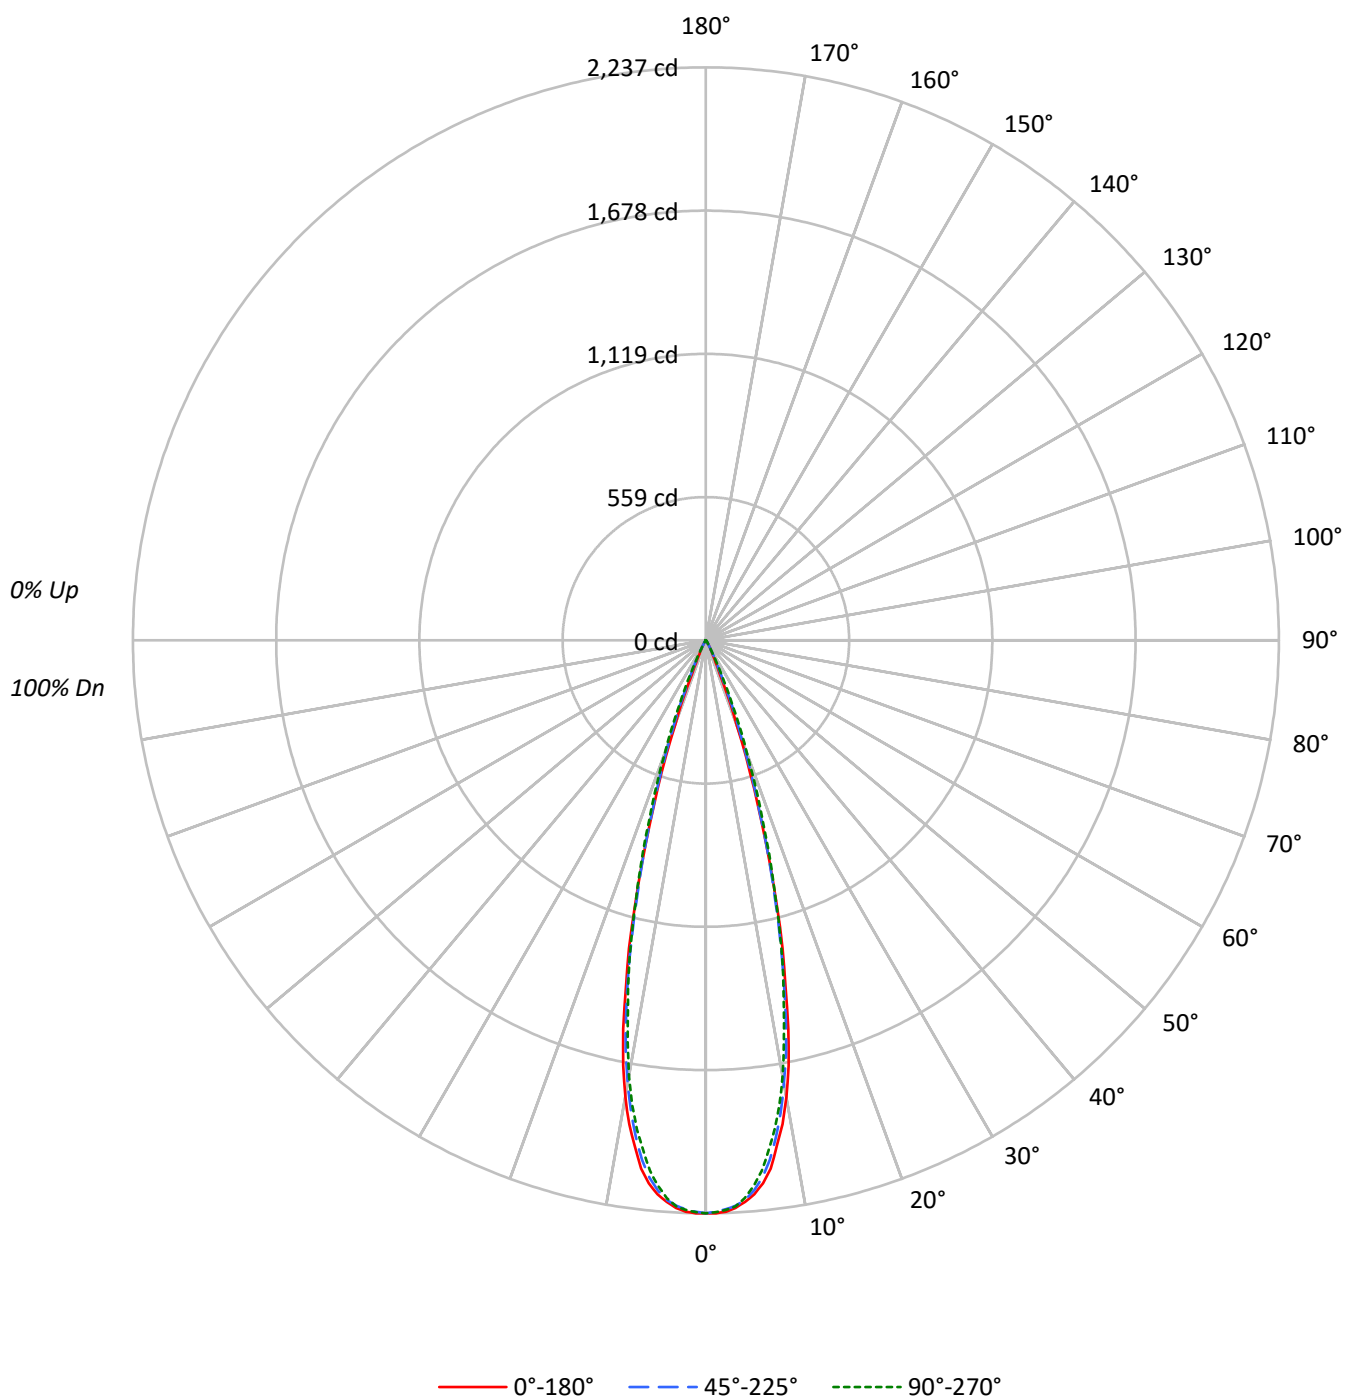

TEST NUMBER: P1306569

CATALOG NUMBER: P3SQAS05R309027DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	385245	385245	385245
5°	375324	372730	369670
10°	316742	307018	302034
15°	190868	185537	188960
20°	64751	74758	86231
25°	11896	18642	22024
30°	4097	4554	5111
35°	1177	1472	1577
40°	315	517	427
45°	122	122	122
50°	134	0	134
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 141 cd/sqm

TEST NUMBER: P1306569

CATALOG NUMBER: P3SQAS05R309027DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.4	35.7
10°-20°	282.7	52.2
20°-30°	59.8	11.0
30°-40°	5.5	1.0
40°-50°	0.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	535.9	98.9
0°-40°	541.4	99.9
0°-60°	542.0	100.0
0°-90°	542.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	542.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2237	2237	2237	2237	2237	
5°	2171	2167	2156	2150	2138	196
15°	1070	1067	1041	1065	1060	282
25°	63	70	98	115	116	46
35°	6	7	7	8	8	5
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1306569

CATALOG NUMBER: P3SQAS05R309027DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2236.9	2236.9	2236.9	2236.9	2236.9
1°	2237.3	2235.0	2231.7	2236.4	2233.1
2°	2232.7	2227.0	2222.4	2227.0	2225.6
3°	2218.6	2214.0	2210.7	2213.0	2213.0
4°	2197.6	2192.5	2189.7	2190.1	2183.1
5°	2171.0	2166.8	2156.0	2149.5	2138.3
6°	2131.7	2121.4	2108.4	2097.6	2083.1
7°	2078.4	2062.6	2043.9	2025.2	2007.0
8°	1992.9	1985.5	1960.2	1947.6	1929.4
9°	1912.6	1894.3	1867.2	1846.7	1836.9
10°	1811.2	1784.1	1755.6	1739.2	1727.1
11°	1691.1	1663.5	1640.6	1616.8	1598.1
12°	1550.0	1526.6	1500.4	1484.5	1462.6
13°	1382.7	1379.4	1350.0	1344.8	1342.0
14°	1239.2	1226.1	1197.2	1205.1	1207.0
15°	1070.5	1066.8	1040.6	1064.9	1059.8
17.5°	670.5	671.9	688.3	726.6	738.8
20°	353.3	364.0	407.9	454.2	470.5
22.5°	143.0	166.8	211.7	243.0	264.0
25°	62.6	70.1	98.1	115.4	115.9
27.5°	35.5	36.0	47.2	49.1	50.0
30°	20.6	21.0	22.9	24.3	25.7
32.5°	11.2	12.1	12.6	14.5	14.5
35°	5.6	7.0	7.0	8.4	7.5
37.5°	3.3	3.7	4.2	4.2	3.7
40°	1.4	1.9	2.3	2.3	1.9
42.5°	0.5	0.9	0.9	0.9	1.4
45°	0.5	0.5	0.5	0.5	0.5
47.5°	0.5	0.5	0.0	0.5	0.5
50°	0.5	0.0	0.0	0.0	0.5
52.5°	0.5	0.0	0.0	0.0	0.5
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1306569
CATALOG NUMBER: P3SQAS05R309027DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)