

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1306635

Luminaire Tested: P3SQAS05R609027DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1306635
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R609027DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 90CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 586.0 lumens
Efficiency: N/A
Efficacy: 81.4 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.93 / 0.9
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1306635

CATALOG NUMBER: P3SQAS05R609027DE010 E3SQCD1MB

Luminous Intensity Polar Plot

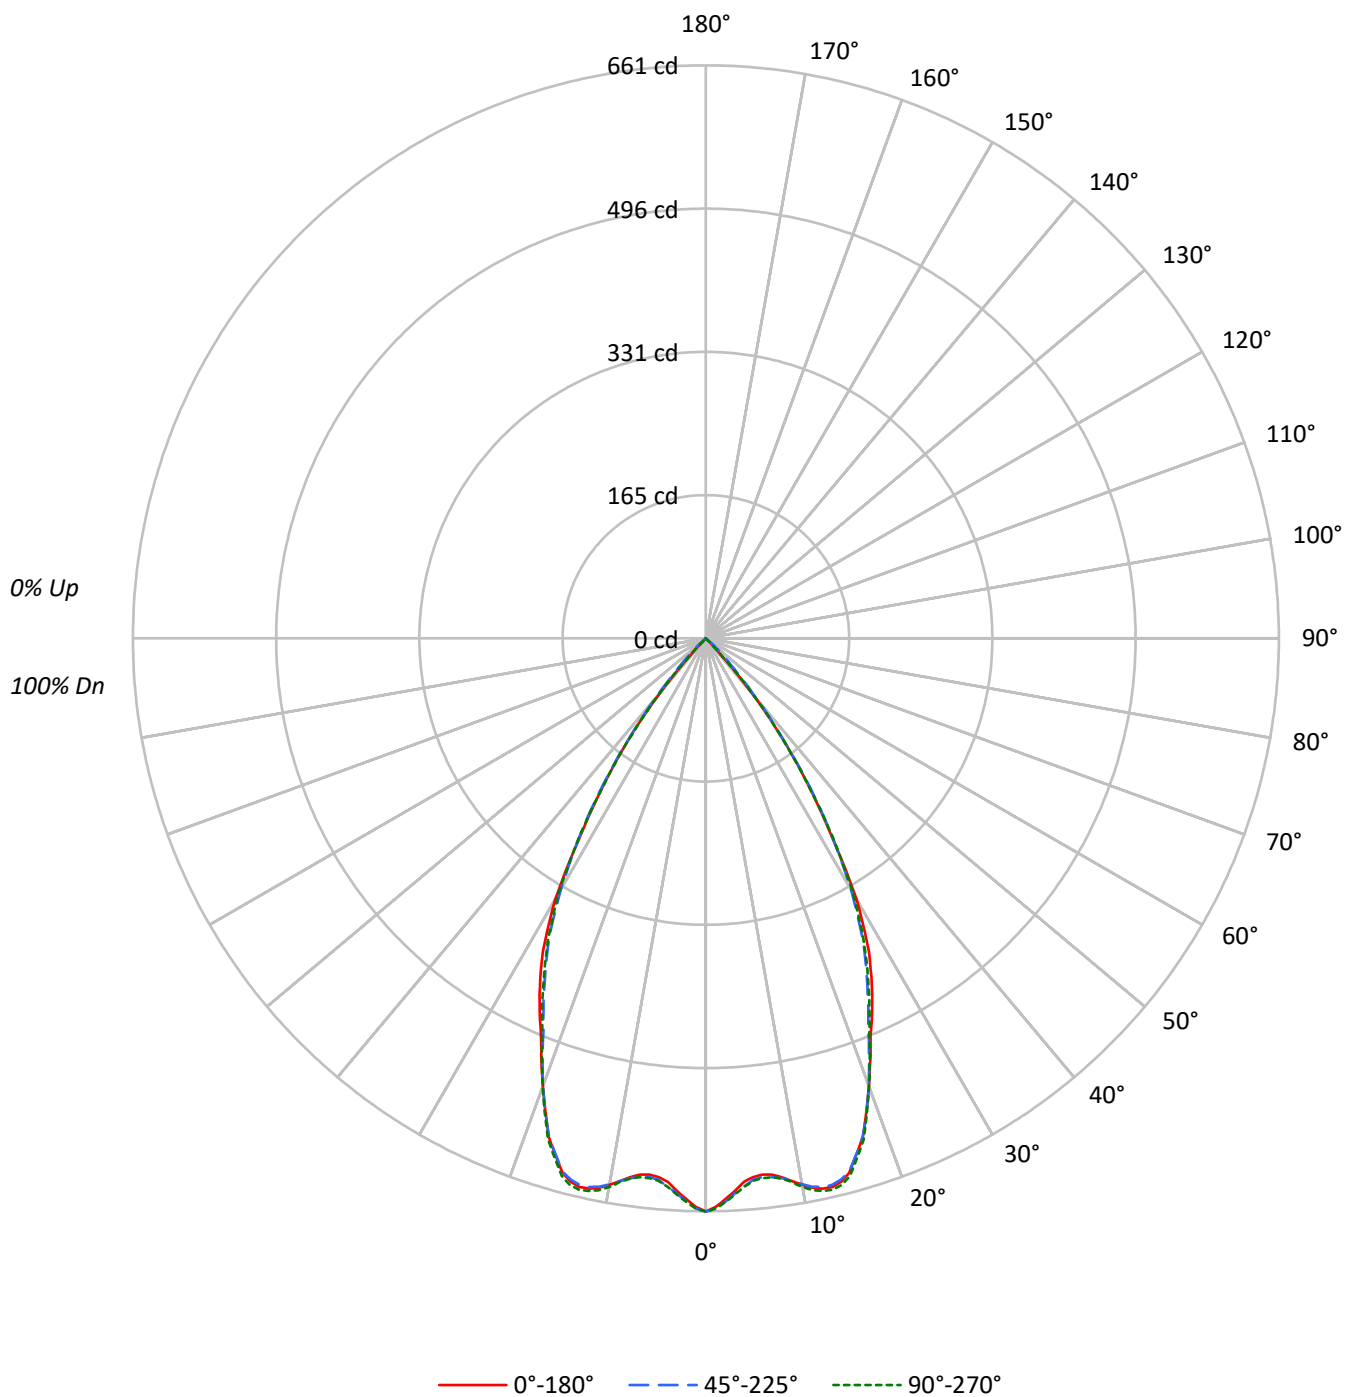

TEST NUMBER: P1306635

CATALOG NUMBER: P3SQAS05R609027DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88
4	98	91	86	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	76	92	84	79	75	83	78	75		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	66	62	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	113891	113891	113891
5°	107860	108413	108586
10°	111958	111800	112447
15°	113825	113647	114485
20°	100728	100728	100893
25°	86310	83745	84448
30°	69046	66540	67555
35°	42848	43731	42743
40°	18817	20706	19335
45°	219	6722	560
50°	0	750	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 6722 cd/sqm

TEST NUMBER: P1306635

CATALOG NUMBER: P3SQAS05R609027DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.4	10.3
10°-20°	175.1	29.9
20°-30°	203.2	34.7
30°-40°	128.0	21.8
40°-50°	19.2	3.3
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	438.7	74.9
0°-40°	566.7	96.7
0°-60°	586.0	100.0
0°-90°	586.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	586.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	661	661	661	661	661	
5°	624	626	627	628	628	60
15°	638	636	637	642	642	175
25°	454	449	441	443	444	206
35°	204	204	208	204	203	127
45°	1	9	28	12	2	13
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1306635

CATALOG NUMBER: P3SQAS05R609027DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	661.3	661.3	661.3	661.3	661.3
1°	656.1	658.0	658.0	658.5	658.0
2°	647.2	650.0	650.0	651.4	650.5
3°	638.4	640.7	641.2	643.0	642.6
4°	628.5	632.3	633.7	634.6	634.2
5°	623.9	626.2	627.1	628.5	628.1
6°	622.0	623.9	624.8	626.2	626.2
7°	623.4	624.8	626.2	627.1	626.2
8°	627.6	629.0	629.0	630.9	629.5
9°	633.7	634.2	634.2	636.5	635.1
10°	640.2	639.3	639.3	642.6	643.0
11°	645.8	644.9	644.4	647.7	648.6
12°	649.1	647.2	647.2	651.4	651.9
13°	649.6	647.2	647.2	651.4	652.8
14°	645.8	643.0	643.5	648.2	649.6
15°	638.4	636.0	637.4	641.6	642.1
17.5°	602.8	601.4	602.4	605.2	605.6
20°	549.6	548.6	549.6	549.6	550.5
22.5°	496.8	494.4	489.8	492.6	493.0
25°	454.2	449.1	440.7	442.6	444.4
27.5°	407.5	401.0	392.1	394.4	394.9
30°	347.2	343.9	334.6	336.9	339.7
32.5°	268.2	277.1	271.5	271.0	271.5
35°	203.8	204.2	208.0	203.8	203.3
37.5°	142.5	143.0	145.8	141.1	141.6
40°	83.7	89.7	92.1	90.2	86.0
42.5°	26.2	46.3	52.3	45.3	29.0
45°	0.9	8.9	27.6	11.7	2.3
47.5°	0.0	0.5	13.1	0.9	0.0
50°	0.0	0.0	2.8	0.0	0.0
52.5°	0.0	0.0	0.5	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1306635
CATALOG NUMBER: P3SQAS05R609027DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)