

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1306649

Luminaire Tested: P3SQAS05R709027DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1306649
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R709027DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R70 optic, 2700K CCT AND, 90CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 553.0 lumens
Efficiency: N/A
Efficacy: 76.8 lumens/watt
Spacing Criteria (0/90/45): 1 / 0.99 / 1.03
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1306649

CATALOG NUMBER: P3SQAS05R709027DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

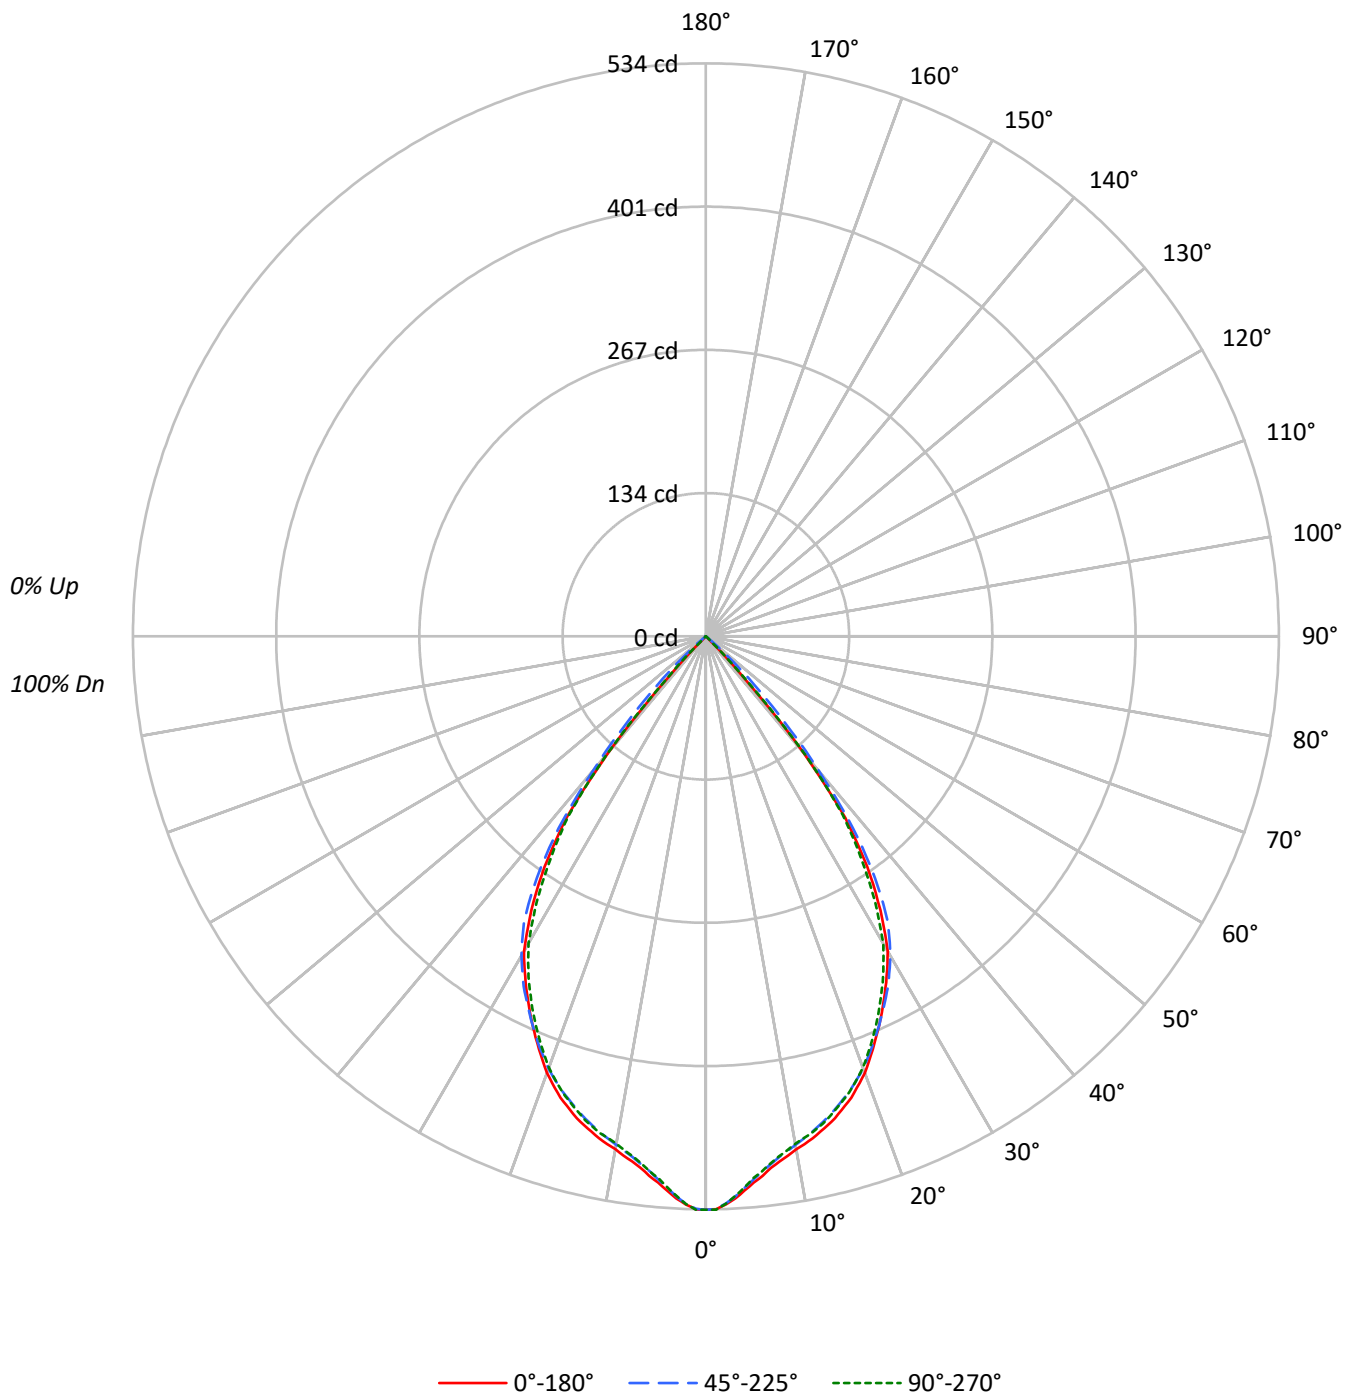

TEST NUMBER: P1306649

CATALOG NUMBER: P3SQAS05R709027DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	98	95	105	101	97	94	98	95	92		95	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	96	89	83	79	95	88	82	78	85	81	77		83	79	76		81
5	91	83	77	72	90	82	76	72	80	75	71		78	74	71		77
6	86	77	71	67	85	76	71	66	75	70	66		73	69	65		72
7	82	72	66	62	80	71	66	61	70	65	61		69	64	61		68
8	78	68	61	57	76	67	61	57	66	61	57		65	60	57		64
9	74	63	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	53	50	58	53	49		58	53	49		57

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	92053	92053	92053
5°	88359	87875	87633
10°	84886	84152	83995
15°	82873	81714	81874
20°	79358	78589	78424
25°	73673	73844	72685
30°	67415	68350	65745
35°	55168	57817	53003
40°	31745	37005	32599
45°	463	15369	1583
50°	0	1634	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 15369 cd/sqm

TEST NUMBER: P1306649

CATALOG NUMBER: P3SQAS05R709027DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.7	8.6
10°-20°	129.2	23.4
20°-30°	177.5	32.1
30°-40°	161.0	29.1
40°-50°	37.4	6.8
50°-60°	0.2	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	354.4	64.1
0°-40°	515.4	93.2
0°-60°	553.0	100.0
0°-90°	553.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	553.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	534	534	534	534	534	
5°	511	510	508	507	507	48
15°	465	462	458	458	459	130
25°	388	390	389	385	382	178
35°	262	266	275	263	252	158
45°	2	21	63	27	6	23
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1306649

CATALOG NUMBER: P3SQAS05R709027DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	534.5	534.5	534.5	534.5	534.5
1°	534.1	533.1	533.6	534.1	534.5
2°	529.8	528.9	528.9	529.4	529.4
3°	524.7	522.8	522.8	522.4	522.4
4°	517.7	516.3	515.3	514.9	514.9
5°	511.1	509.7	508.3	507.4	506.9
6°	505.5	503.2	501.3	500.9	501.3
7°	499.0	497.6	495.7	494.3	494.8
8°	494.3	492.4	490.1	489.2	489.2
9°	490.1	488.2	485.9	484.0	485.0
10°	485.4	483.5	481.2	479.8	480.3
11°	482.1	479.8	477.0	476.1	476.5
12°	478.4	475.6	472.8	472.3	473.3
13°	473.7	470.9	468.1	468.1	469.1
14°	469.5	466.2	463.4	463.4	464.8
15°	464.8	461.6	458.3	458.3	459.2
17.5°	450.8	448.0	444.7	444.7	445.2
20°	433.0	431.6	428.8	427.4	427.9
22.5°	410.6	410.6	409.2	406.9	405.9
25°	387.7	389.6	388.6	384.9	382.5
27.5°	363.8	367.1	367.6	362.0	357.8
30°	339.0	341.9	343.7	337.2	330.6
32.5°	302.6	311.0	315.7	306.8	293.2
35°	262.4	266.1	275.0	263.3	252.1
37.5°	213.2	217.9	225.4	216.1	209.5
40°	141.2	159.9	164.6	159.9	145.0
42.5°	51.0	89.8	108.0	91.7	59.9
45°	1.9	21.0	63.1	27.1	6.5
47.5°	0.0	0.5	28.5	0.9	0.0
50°	0.0	0.0	6.1	0.0	0.0
52.5°	0.0	0.0	0.5	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1306649

CATALOG NUMBER: P3SQAS05R709027DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)