

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1306675

Luminaire Tested: P3SQAS09R159027DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1306675
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R159027DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 90CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 864.0 lumens
Efficiency: N/A
Efficacy: 77.8 lumens/watt
Spacing Criteria (0/90/45): 0.29 / 0.29 / 0.29
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1306675

CATALOG NUMBER: P3SQAS09R159027DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

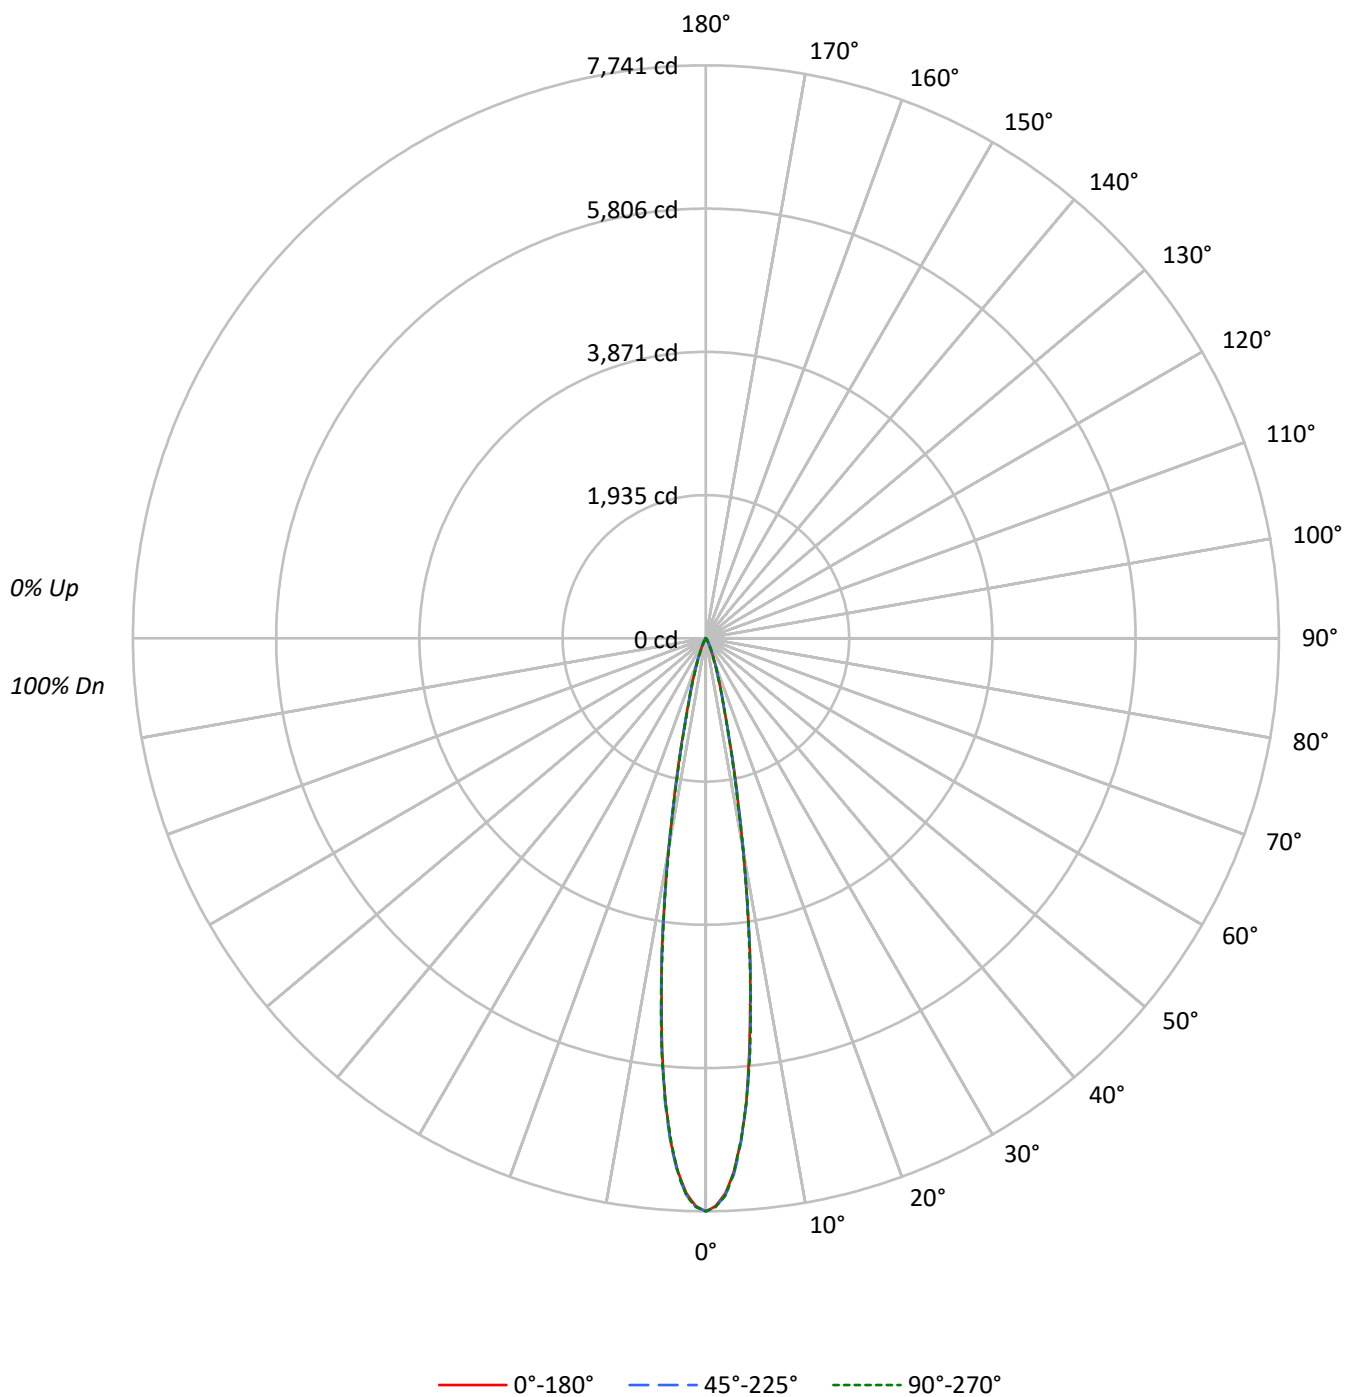

TEST NUMBER: P1306675

CATALOG NUMBER: P3SQAS09R159027DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	116	114	112	111	113	112	110	109	108	107	106		104	103	102		101
2	113	109	107	105	111	108	106	104	105	103	101		102	101	99		99
3	110	106	103	100	108	105	102	100	102	100	98		100	98	97		98
4	107	103	99	97	106	102	99	96	100	97	95		98	96	94		96
5	105	100	97	94	104	99	96	94	98	95	93		96	94	92		95
6	103	97	94	92	102	97	94	91	96	93	91		94	92	90		93
7	101	95	92	90	100	95	92	89	94	91	89		93	90	88		92
8	99	93	90	88	98	93	90	88	92	89	87		91	89	87		90
9	97	91	88	86	96	91	88	86	90	88	86		90	87	85		89
10	95	90	87	84	95	90	86	84	89	86	84		88	86	84		88

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1333244	1333244	1333244
5°	1085517	1089061	1086934
10°	506363	510910	504457
15°	159006	160343	159381
20°	62992	65503	60994
25°	25445	30784	24551
30°	10202	14000	9645
35°	3028	6181	2880
40°	922	2316	764
45°	170	511	170
50°	0	188	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 511 cd/sqm

TEST NUMBER: P1306675

CATALOG NUMBER: P3SQAS09R159027DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	484.7	56.1
10°-20°	289.9	33.6
20°-30°	73.1	8.5
30°-40°	14.9	1.7
40°-50°	1.4	0.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	847.7	98.1
0°-40°	862.6	99.8
0°-60°	864.0	100.0
0°-90°	864.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	864.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	7741	7741	7741	7741	7741	
5°	6279	6267	6300	6284	6287	483
15°	892	899	899	886	894	290
25°	134	146	162	144	129	69
35°	14	19	29	18	14	12
45°	1	1	2	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1306675

CATALOG NUMBER: P3SQAS09R159027DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	7741.4	7741.4	7741.4	7741.4	7741.4
1°	7671.7	7697.7	7684.0	7694.9	7682.6
2°	7505.6	7540.5	7529.6	7526.1	7535.7
3°	7213.2	7253.5	7252.1	7241.9	7225.5
4°	6814.1	6797.7	6822.9	6820.2	6792.2
5°	6279.0	6267.3	6299.5	6283.7	6287.2
6°	5624.3	5674.8	5663.9	5665.3	5678.3
7°	4921.1	4948.4	4971.6	4990.8	4964.1
8°	4275.3	4268.4	4270.5	4292.4	4218.5
9°	3552.2	3594.6	3567.3	3523.5	3551.6
10°	2895.5	2921.5	2921.5	2883.2	2884.6
11°	2308.5	2329.7	2314.6	2324.2	2264.1
12°	1860.9	1808.2	1795.9	1805.5	1804.8
13°	1420.8	1424.2	1420.8	1420.1	1413.2
14°	1113.9	1131.7	1124.2	1105.7	1097.5
15°	891.8	899.3	899.3	886.4	893.9
17.5°	535.8	544.7	546.7	537.8	537.8
20°	343.7	347.8	357.4	344.4	332.8
22.5°	211.8	220.7	237.1	218.0	208.4
25°	133.9	146.2	162.0	143.5	129.2
27.5°	84.1	94.3	108.0	90.2	81.3
30°	51.3	58.1	70.4	56.7	48.5
32.5°	28.7	34.2	44.4	32.8	27.3
35°	14.4	19.1	29.4	18.5	13.7
37.5°	8.2	10.3	18.5	8.9	7.5
40°	4.1	5.5	10.3	5.5	3.4
42.5°	1.4	2.7	4.1	2.7	1.4
45°	0.7	1.4	2.1	1.4	0.7
47.5°	0.0	0.0	0.7	0.0	0.0
50°	0.0	0.0	0.7	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1306675
CATALOG NUMBER: P3SQAS09R159027DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)