

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1306691

Luminaire Tested: P3SQAS09R209027DE010 E3SQPH1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1306691
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R209027DE010 E3SQPH1MB
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 90CRI , E3SQPH1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 767.0 lumens
Efficiency: N/A
Efficacy: 69.1 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.36 / 0.33
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1306691

CATALOG NUMBER: P3SQAS09R209027DE010 E3SQPH1MB

Luminous Intensity Polar Plot

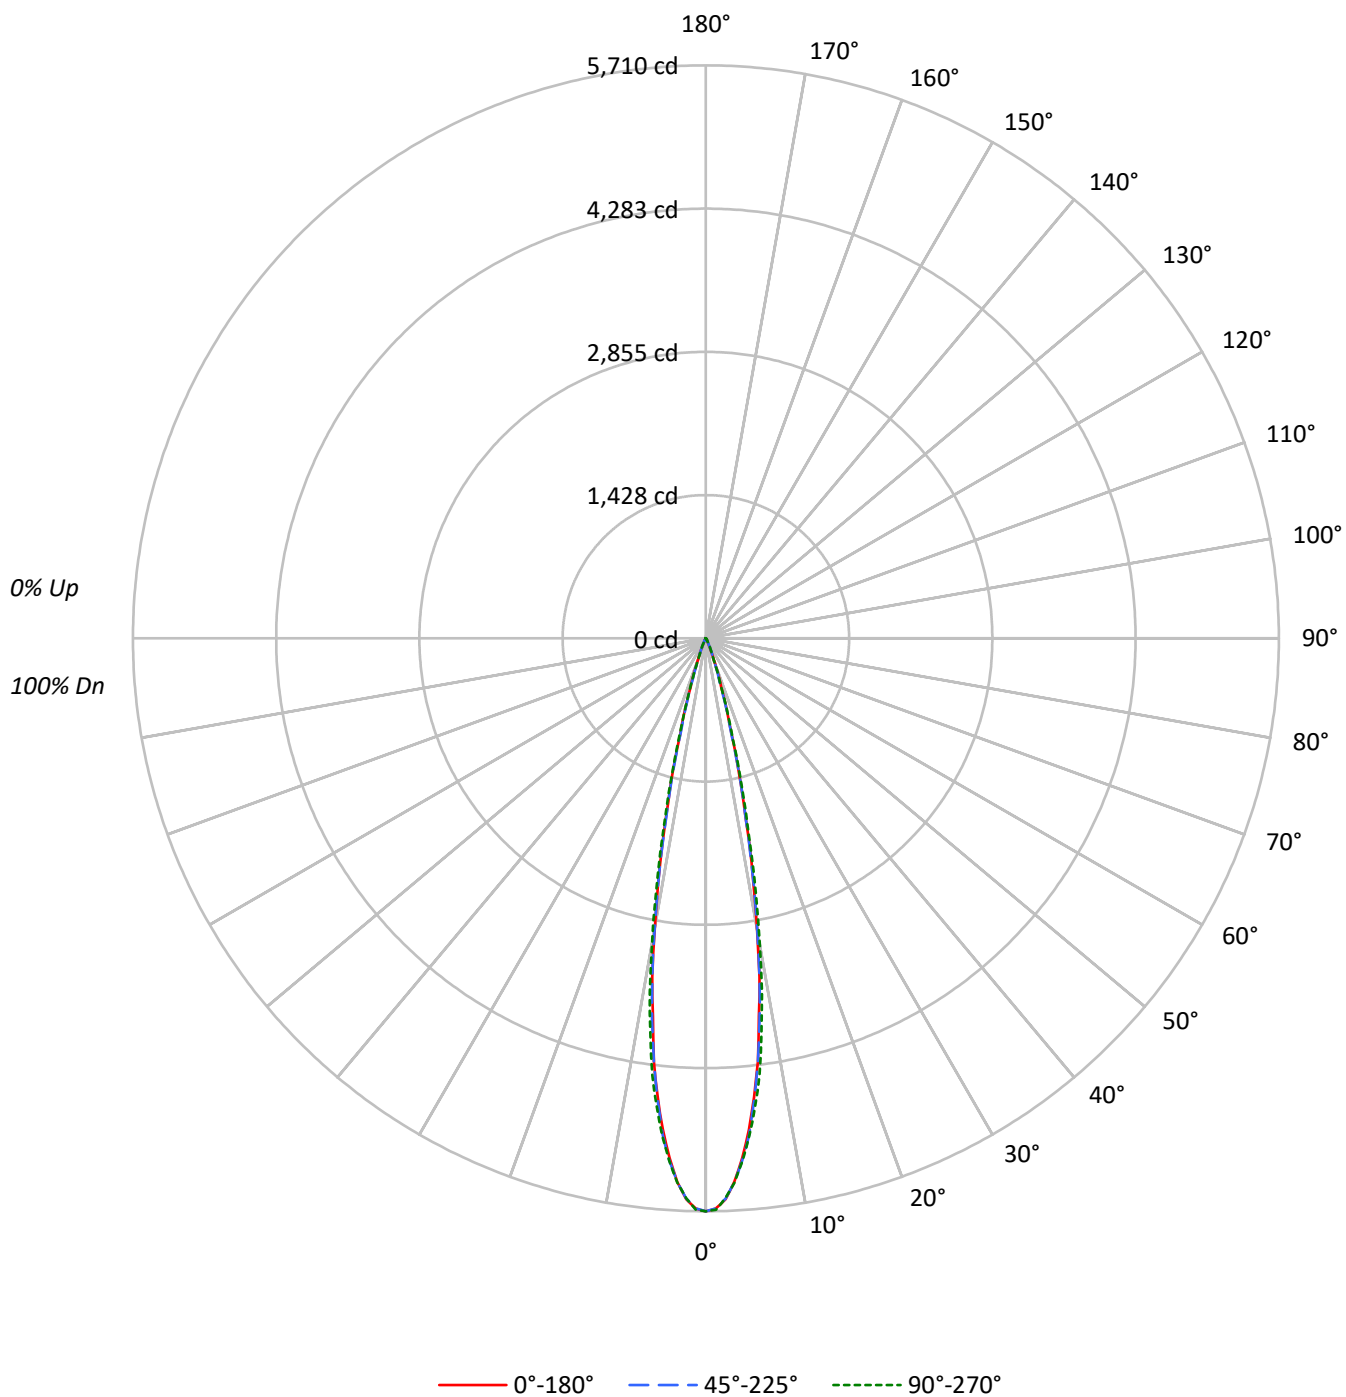

TEST NUMBER: P1306691

CATALOG NUMBER: P3SQAS09R209027DE010 E3SQPH1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111		106	106	106		102	102	102
1	116	114	112	111	113	112	110	109		108	107	106		104	103	102		101	100	100
2	113	109	107	105	111	108	106	104		105	103	101		102	101	99		99	98	97
3	110	106	103	100	108	105	102	100		102	100	98		100	98	97		98	96	95
4	107	103	99	97	106	102	99	96		100	97	95		98	96	94		96	95	93
5	105	100	97	94	104	99	96	94		98	95	93		96	94	92		95	93	92
6	103	98	94	92	102	97	94	91		96	93	91		95	92	90		93	91	90
7	101	95	92	90	100	95	92	89		94	91	89		93	90	89		92	90	88
8	99	93	90	88	98	93	90	88		92	89	87		91	89	87		91	88	87
9	97	92	88	86	96	91	88	86		91	88	86		90	87	86		89	87	85
10	95	90	87	85	95	90	87	85		89	86	84		88	86	84		88	86	84

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	983477	983477	983477
5°	849621	857522	860720
10°	511452	516244	541934
15°	176907	172771	186535
20°	46460	43711	43840
25°	10128	12200	13891
30°	4355	4355	4474
35°	2439	2144	2292
40°	1079	1237	1371
45°	341	487	487
50°	188	188	188
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 487 cd/sqm

TEST NUMBER: P1306691

CATALOG NUMBER: P3SQAS09R209027DE010 E3SQPH1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	408.4	53.3
10°-20°	311.0	40.5
20°-30°	38.4	5.0
30°-40°	7.3	0.9
40°-50°	1.7	0.2
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	757.9	98.8
0°-40°	765.1	99.8
0°-60°	767.0	100.0
0°-90°	767.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	767.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5710	5710	5710	5710	5710	
5°	4914	4911	4960	4957	4979	405
15°	992	957	969	1027	1046	311
25°	53	61	64	67	73	37
35°	12	12	10	11	11	7
45°	1	2	2	2	2	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1306691

CATALOG NUMBER: P3SQAS09R209027DE010 E3SQPH1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5710.5	5710.5	5710.5	5710.5	5710.5
1°	5683.9	5677.1	5682.5	5670.9	5694.8
2°	5593.0	5586.2	5586.2	5579.3	5582.8
3°	5423.5	5434.5	5427.6	5413.3	5431.7
4°	5192.6	5204.9	5215.8	5216.5	5219.2
5°	4914.5	4911.1	4960.2	4956.8	4978.7
6°	4597.4	4593.3	4614.5	4650.0	4693.8
7°	4248.9	4199.0	4255.7	4327.5	4386.3
8°	3797.9	3810.9	3849.8	3934.6	3981.7
9°	3415.3	3339.4	3422.1	3523.2	3574.5
10°	2924.6	2863.1	2952.0	3058.6	3098.9
12.5°	1840.9	1787.6	1816.3	1928.3	1946.1
15°	992.2	956.7	969.0	1027.0	1046.2
17.5°	506.3	474.2	467.4	504.3	508.4
20°	253.5	246.0	238.5	241.9	239.2
22.5°	117.5	127.8	126.4	119.6	127.8
25°	53.3	60.8	64.2	67.0	73.1
27.5°	32.8	31.4	36.2	38.9	39.6
30°	21.9	21.2	21.9	22.5	22.5
32.5°	15.7	15.0	14.3	14.3	15.0
35°	11.6	11.6	10.2	10.9	10.9
37.5°	8.2	8.2	7.5	8.2	8.2
40°	4.8	5.5	5.5	5.5	6.1
42.5°	2.7	3.4	3.4	3.4	3.4
45°	1.4	2.0	2.0	2.0	2.0
47.5°	0.7	0.7	0.7	1.4	1.4
50°	0.7	0.7	0.7	0.7	0.7
52.5°	0.7	0.0	0.0	0.0	0.7
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)