

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1307502

Luminaire Tested: P3SQAS02R259030DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1307502
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R259030DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 273.0 lumens
Efficiency: N/A
Efficacy: 75.8 lumens/watt
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.4
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1307502

CATALOG NUMBER: P3SQAS02R259030DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

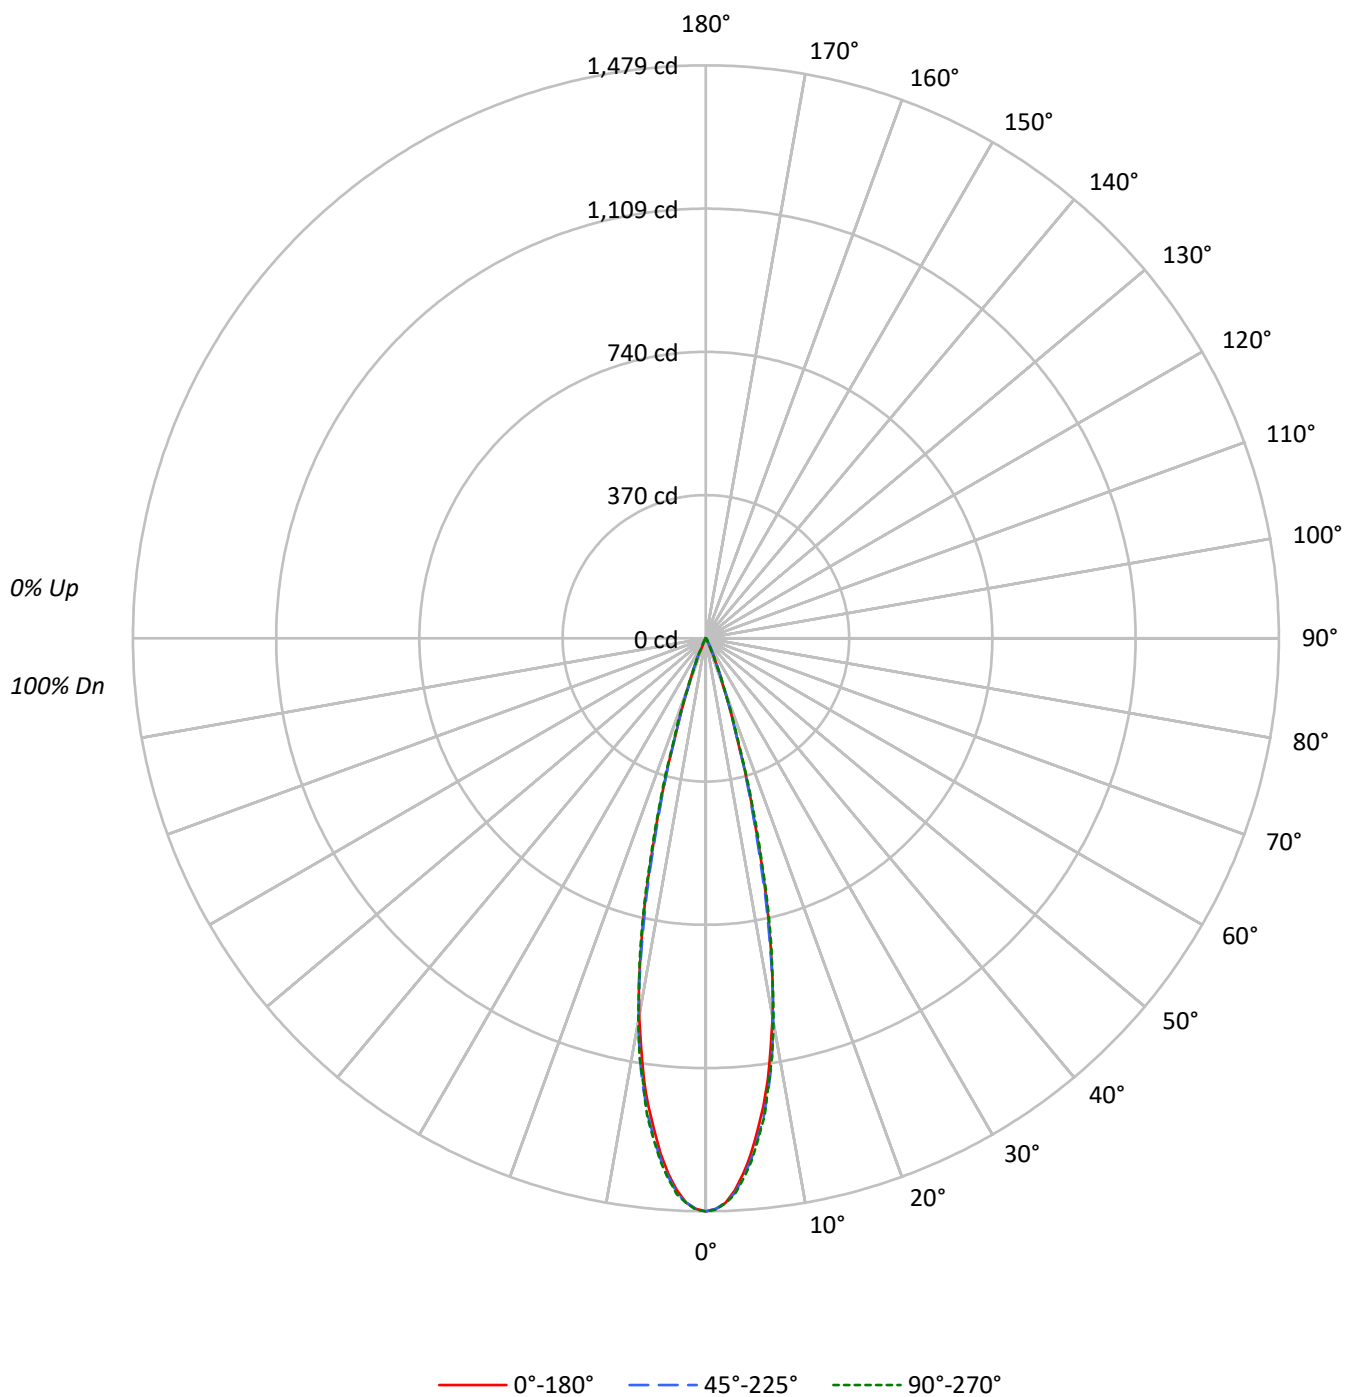

TEST NUMBER: P1307502

CATALOG NUMBER: P3SQAS02R259030DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	112	110	113	111	110	108	107	106	105		104	103	102		100
2	112	109	106	104	110	107	105	103	104	102	101		101	100	98		99
3	109	105	102	99	107	104	101	98	101	99	97		99	97	95		97
4	106	101	98	95	105	100	97	95	99	96	94		97	94	93		95
5	104	98	95	92	102	98	94	92	96	93	91		95	92	90		93
6	101	96	92	89	100	95	92	89	94	91	89		93	90	88		91
7	99	93	89	87	98	93	89	87	92	89	86		91	88	86		90
8	97	91	87	85	96	90	87	85	90	86	84		89	86	84		88
9	95	89	85	83	94	88	85	83	88	85	82		87	84	82		86
10	93	87	83	81	92	86	83	81	86	83	81		85	82	80		85

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	254769	254769	254769
5°	230865	232974	234097
10°	173550	174792	175596
15°	85940	83372	88935
20°	24266	24669	24944
25°	4219	7962	4998
30°	1651	1690	1750
35°	505	568	568
40°	157	225	157
45°	122	49	122
50°	54	0	54
55°	60	0	60
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 122 cd/sqm

TEST NUMBER: P1307502

CATALOG NUMBER: P3SQAS02R259030DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.5	43.0
10°-20°	132.5	48.5
20°-30°	20.6	7.5
30°-40°	2.1	0.8
40°-50°	0.3	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	270.6	99.1
0°-40°	272.7	99.9
0°-60°	273.0	100.0
0°-90°	273.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	273.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1479	1479	1479	1479	1479	
5°	1335	1338	1348	1353	1354	116
15°	482	479	468	488	499	132
25°	22	33	42	32	26	19
35°	2	3	3	3	3	2
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1307502

CATALOG NUMBER: P3SQAS02R259030DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1479.3	1479.3	1479.3	1479.3	1479.3
1°	1473.2	1475.1	1472.9	1475.4	1475.1
2°	1457.8	1459.8	1457.1	1458.6	1458.6
3°	1426.4	1430.6	1433.0	1434.7	1436.2
4°	1385.1	1389.7	1393.3	1397.7	1397.7
5°	1335.4	1337.8	1347.6	1352.9	1354.1
6°	1276.2	1286.0	1293.3	1304.0	1297.4
7°	1217.1	1225.1	1235.4	1237.1	1241.7
8°	1149.9	1158.4	1167.9	1166.2	1162.3
9°	1068.1	1080.5	1091.7	1088.1	1093.0
10°	992.4	1000.0	999.5	995.8	1004.1
11°	904.5	906.2	896.8	911.6	902.6
12°	800.4	801.8	789.7	804.3	813.5
13°	700.6	697.2	680.4	699.6	711.3
14°	585.7	586.9	565.5	602.7	599.8
15°	482.0	478.6	467.6	488.5	498.8
17.5°	256.8	259.0	256.3	266.8	273.4
20°	132.4	136.1	134.6	139.0	136.1
22.5°	68.6	73.8	75.2	71.8	62.6
25°	22.2	32.9	41.9	31.9	26.3
27.5°	13.4	13.1	20.4	14.1	14.4
30°	8.3	8.0	8.5	8.5	8.8
32.5°	4.6	4.9	4.6	5.1	4.9
35°	2.4	2.7	2.7	2.9	2.7
37.5°	1.5	1.7	1.7	1.7	1.5
40°	0.7	1.0	1.0	0.7	0.7
42.5°	0.5	0.5	0.5	0.5	0.5
45°	0.5	0.2	0.2	0.2	0.5
47.5°	0.2	0.2	0.0	0.2	0.2
50°	0.2	0.2	0.0	0.2	0.2
52.5°	0.2	0.0	0.0	0.0	0.2
55°	0.2	0.0	0.0	0.0	0.2
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1307502
CATALOG NUMBER: P3SQAS02R259030DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)