

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1307541

Luminaire Tested: P3SQAS02R359030DE010 E3SQPHLD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1307541
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R359030DE010 E3SQPHLD1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3SQPHLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 189.0 lumens
Efficiency: N/A
Efficacy: 52.5 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.92
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1307541

CATALOG NUMBER: P3SQAS02R359030DE010 E3SQPHLD1MW

Luminous Intensity Polar Plot

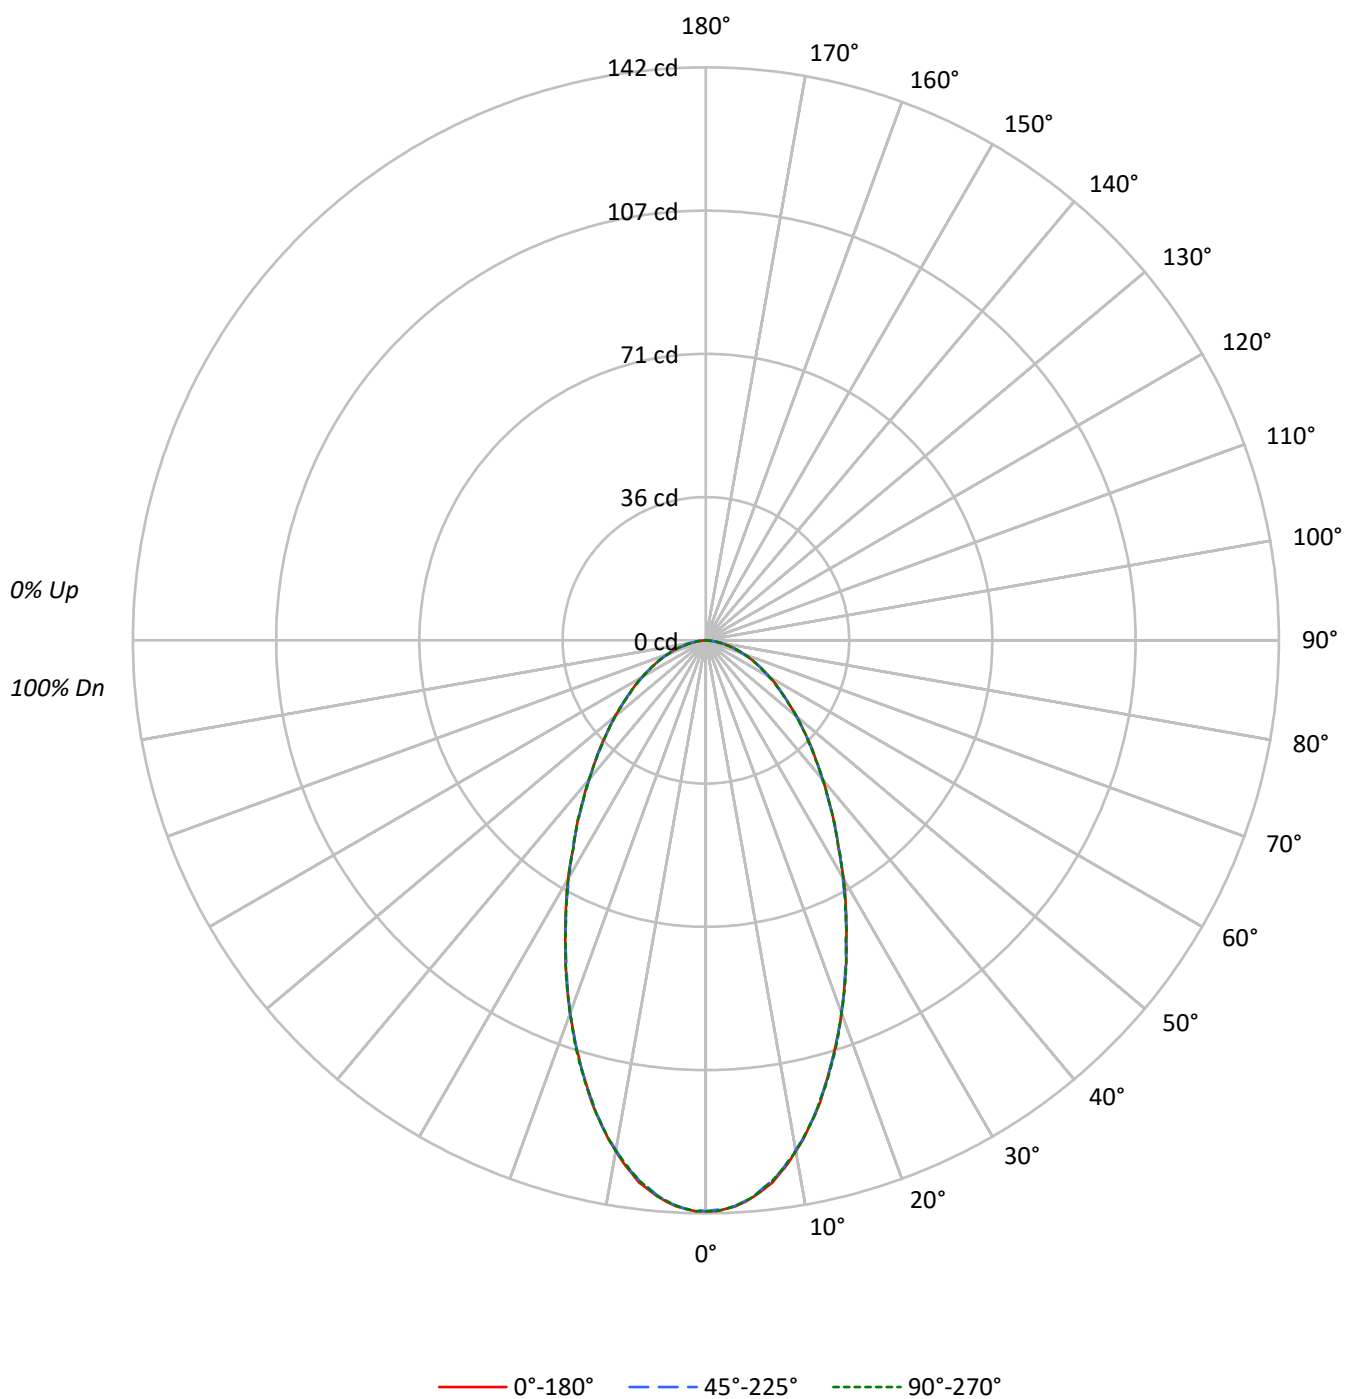

TEST NUMBER: P1307541

CATALOG NUMBER: P3SQAS02R359030DE010 E3SQPHLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	107	103	100	108	105	101	99	100	98	95		97	95	93		93
2	103	96	90	85	100	94	89	84	90	86	82		87	84	81		84
3	95	86	79	74	93	85	78	73	82	76	72		79	75	71		77
4	88	78	71	65	86	77	70	65	75	68	64		72	67	63		70
5	82	71	64	58	80	70	63	58	68	62	57		66	61	56		65
6	77	65	58	52	75	65	57	52	63	56	51		61	55	51		60
7	72	60	53	47	71	60	52	47	58	52	47		57	51	46		55
8	68	56	48	43	66	55	48	43	54	47	43		53	47	43		52
9	64	52	45	40	63	51	44	40	50	44	39		49	44	39		48
10	60	49	42	37	59	48	41	37	47	41	37		46	41	36		45

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	24370	24370	24370
5°	23909	23875	23909
10°	22472	22437	22472
15°	20362	20362	20397
20°	18016	18016	18016
25°	15658	15620	15620
30°	13583	13483	13543
35°	11690	11648	11690
40°	10139	10094	10139
45°	8914	8841	8841
50°	7904	7850	7850
55°	6966	6966	6966
60°	6303	6234	6303
65°	5664	5664	5664
70°	5035	5035	5035
75°	4525	4392	4525
80°	3868	3868	3868
85°	2371	2371	2371

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8914 cd/sqm

TEST NUMBER: P1307541

CATALOG NUMBER: P3SQAS02R359030DE010 E3SQPHLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.9	6.8
10°-20°	31.8	16.8
20°-30°	37.8	20.0
30°-40°	34.8	18.4
40°-50°	28.2	14.9
50°-60°	20.9	11.1
60°-70°	13.8	7.3
70°-80°	7.1	3.8
80°-90°	1.6	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	82.6	43.7
0°-40°	117.3	62.1
0°-60°	166.5	88.1
0°-90°	189.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	189.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	142	142	142	142	142	
5°	138	138	138	138	138	13
15°	114	114	114	114	114	32
25°	82	82	82	82	82	38
35°	56	55	55	56	56	35
45°	37	36	36	36	36	28
55°	23	23	23	23	23	21
65°	14	14	14	14	14	14
75°	7	7	7	7	7	7
85°	1	1	1	1	1	2
90°	0	0	0	0	0	

TEST NUMBER: P1307541

CATALOG NUMBER: P3SQAS02R359030DE010 E3SQPHLD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	141.5	141.5	141.5	141.5	141.5
1°	141.5	141.2	141.2	141.2	141.5
2°	141.0	141.0	141.0	141.0	141.0
3°	140.5	140.3	140.3	140.3	140.3
4°	139.5	139.3	139.3	139.3	139.3
5°	138.3	138.1	138.1	138.1	138.3
6°	136.8	136.6	136.4	136.4	136.6
7°	135.4	134.9	134.9	134.9	134.9
8°	133.2	132.9	132.9	132.9	132.9
9°	131.0	130.5	130.7	130.7	130.7
10°	128.5	128.3	128.3	128.3	128.5
11°	126.1	125.9	125.9	125.6	125.9
12°	123.2	123.2	123.2	123.2	123.2
13°	120.5	120.3	120.3	120.3	120.5
14°	117.6	117.3	117.3	117.3	117.3
15°	114.2	114.2	114.2	114.2	114.4
17.5°	106.3	106.1	106.3	106.3	106.6
20°	98.3	98.1	98.3	98.3	98.3
22.5°	90.3	90.3	90.0	90.3	90.5
25°	82.4	82.2	82.2	82.4	82.2
27.5°	75.1	74.9	74.9	74.9	74.9
30°	68.3	67.8	67.8	68.1	68.1
32.5°	61.2	61.2	61.5	61.2	61.2
35°	55.6	55.4	55.4	55.6	55.6
37.5°	50.0	49.8	49.8	50.0	50.0
40°	45.1	45.1	44.9	45.1	45.1
42.5°	40.5	40.5	40.5	40.5	40.5
45°	36.6	36.3	36.3	36.3	36.3
47.5°	32.7	32.7	32.7	32.4	32.7
50°	29.5	29.3	29.3	29.3	29.3
52.5°	26.1	26.1	26.1	26.1	26.1
55°	23.2	23.2	23.2	23.2	23.2
57.5°	20.7	20.5	20.5	20.5	20.5
60°	18.3	18.3	18.1	18.3	18.3
62.5°	15.9	15.9	15.9	15.9	15.9
65°	13.9	13.9	13.9	13.9	13.9
67.5°	12.0	12.0	12.0	12.0	12.0
70°	10.0	10.0	10.0	10.0	10.0
72.5°	8.5	8.3	8.3	8.3	8.3
75°	6.8	6.8	6.6	6.8	6.8
77.5°	5.1	5.1	5.1	5.1	5.1
80°	3.9	3.9	3.9	3.7	3.9
82.5°	2.4	2.4	2.4	2.4	2.4
85°	1.2	1.2	1.2	1.2	1.2
87.5°	0.2	0.2	0.2	0.5	0.5



TEST NUMBER: P1307541

CATALOG NUMBER: P3SQAS02R359030DE010 E3SQPHLD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)