

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1307668

Luminaire Tested: P3SQAS05R259030DE010 E3SQCD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1307668
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R259030DE010 E3SQCD1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3SQCD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 657.0 lumens
Efficiency: N/A
Efficacy: 91.2 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1307668

CATALOG NUMBER: P3SQAS05R259030DE010 E3SQCD1MW

Luminous Intensity Polar Plot

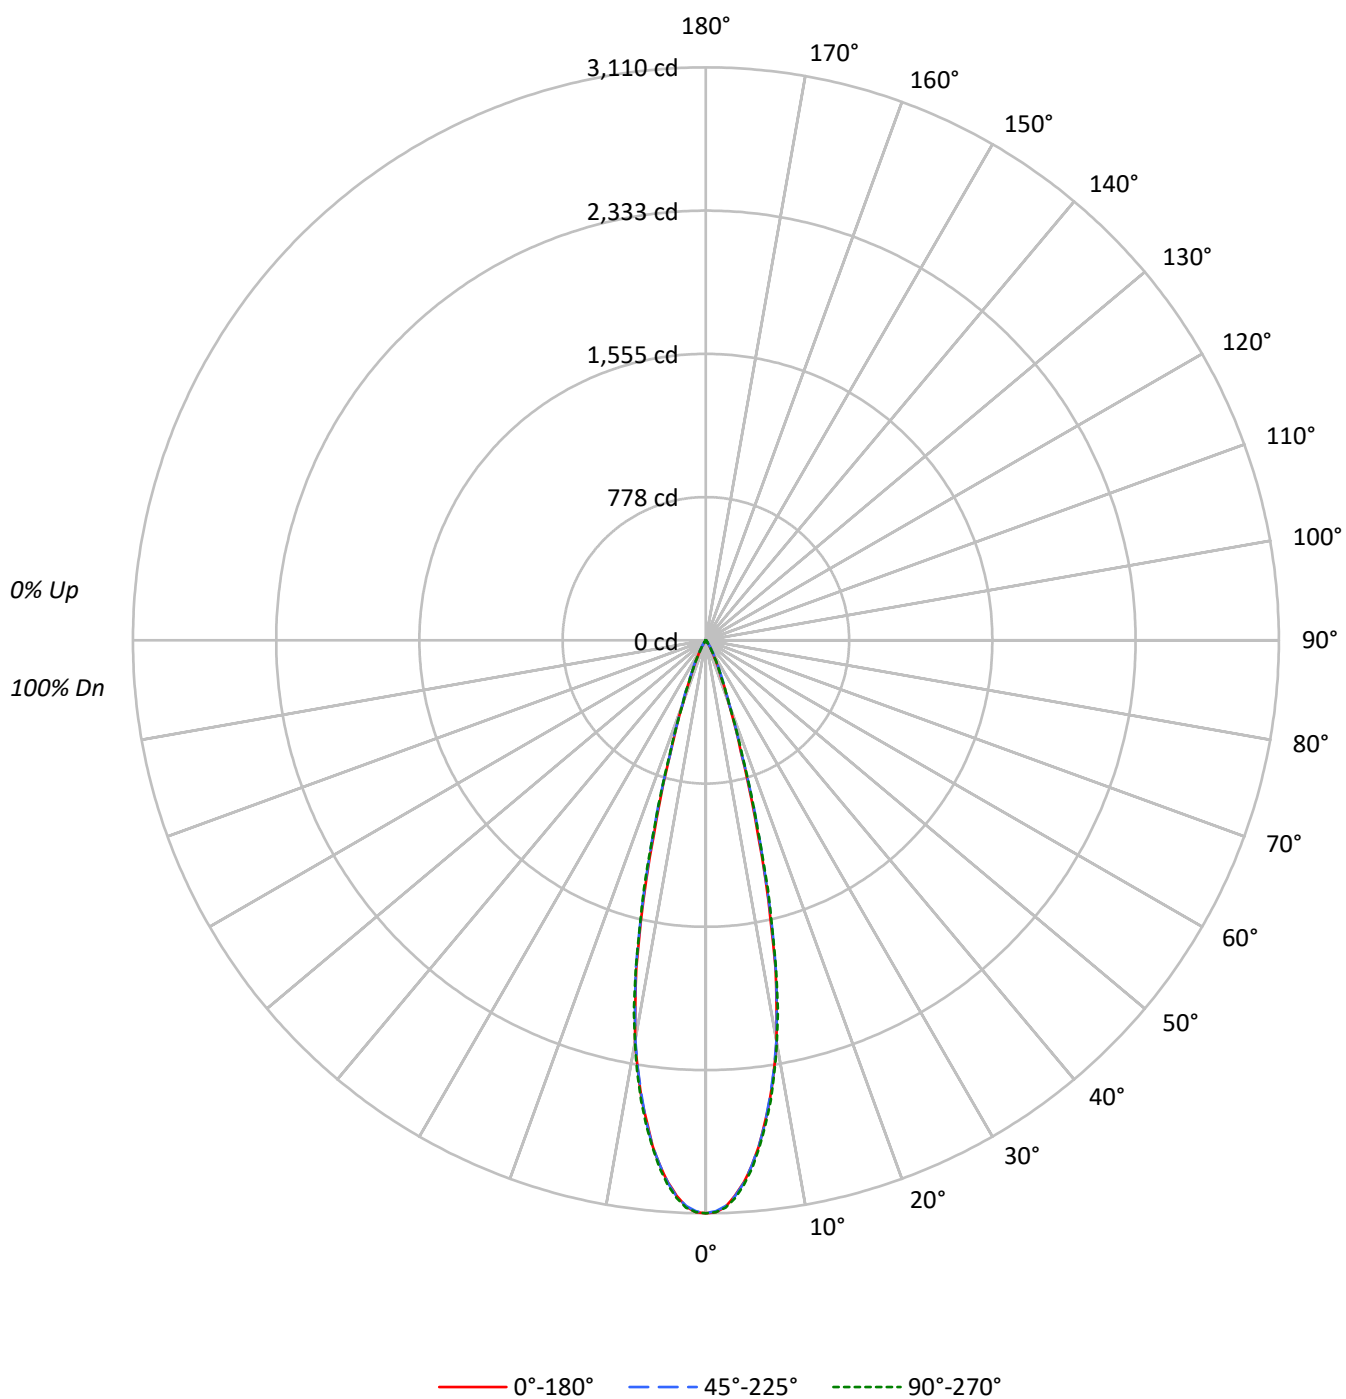

TEST NUMBER: P1307668

CATALOG NUMBER: P3SQAS05R259030DE010 E3SQCD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	102	102		100
2	112	108	105	103	110	107	104	102	103	101	100		101	99	97		98
3	108	104	100	98	107	103	99	97	100	98	95		98	96	94		96
4	105	100	96	93	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	92	90	94	91	89		93	90	88		91
6	100	94	90	87	98	93	89	87	92	88	86		90	88	86		89
7	97	91	87	84	96	90	87	84	89	86	84		88	85	83		87
8	95	88	84	82	94	88	84	82	87	84	81		86	83	81		85
9	92	86	82	80	91	86	82	79	85	82	79		84	81	79		83
10	90	84	80	78	89	84	80	77	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	535612	535612	535612
5°	494732	494559	497325
10°	386449	385399	388023
15°	194416	202547	202368
20°	66529	68362	67262
25°	26737	30062	27877
30°	10858	12946	10560
35°	3154	5677	3154
40°	1461	2473	1461
45°	487	974	487
50°	268	402	268
55°	300	300	300
60°	344	344	344
65°	204	204	204
70°	252	252	252
75°	333	333	333
80°	0	496	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 974 cd/sqm

TEST NUMBER: P1307668

CATALOG NUMBER: P3SQAS05R259030DE010 E3SQCD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	252.3	38.4
10°-20°	308.8	47.0
20°-30°	75.4	11.5
30°-40°	15.6	2.4
40°-50°	2.7	0.4
50°-60°	0.9	0.1
60°-70°	0.7	0.1
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	636.6	96.9
0°-40°	652.1	99.3
0°-60°	655.8	99.8
0°-90°	657.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	657.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3110	3110	3110	3110	3110	
5°	2862	2864	2861	2867	2877	252
15°	1090	1109	1136	1141	1135	304
25°	141	147	158	149	147	72
35°	15	21	27	20	15	13
45°	2	3	4	3	2	2
55°	1	1	1	1	1	1
65°	0	1	0	0	0	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1307668

CATALOG NUMBER: P3SQAS05R259030DE010 E3SQCD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3110.0	3110.0	3110.0	3110.0	3110.0
1°	3104.0	3100.0	3099.0	3099.5	3104.5
2°	3075.9	3073.4	3072.9	3074.4	3081.4
3°	3018.9	3021.9	3022.9	3027.9	3031.4
4°	2948.8	2954.8	2952.3	2958.3	2962.3
5°	2861.7	2864.2	2860.7	2866.7	2876.7
6°	2760.0	2751.0	2759.5	2762.0	2769.0
7°	2633.4	2635.4	2638.4	2641.4	2651.9
8°	2508.7	2502.7	2501.2	2515.2	2523.7
9°	2363.0	2364.0	2358.5	2374.5	2377.0
10°	2209.8	2197.3	2203.8	2216.3	2218.8
11°	2007.6	2004.1	2013.6	2033.1	2048.6
12°	1817.8	1819.8	1829.8	1836.4	1832.8
13°	1567.0	1582.0	1594.5	1601.0	1592.5
14°	1340.2	1340.2	1356.2	1358.7	1389.3
15°	1090.4	1108.9	1136.0	1141.0	1135.0
17.5°	629.8	632.3	645.3	644.8	654.3
20°	363.0	366.5	373.0	371.5	367.0
22.5°	218.3	225.8	241.3	228.8	225.3
25°	140.7	147.2	158.2	149.2	146.7
27.5°	88.1	92.6	101.1	93.1	89.1
30°	54.6	57.1	65.1	57.6	53.1
32.5°	29.5	36.0	42.6	36.0	29.5
35°	15.0	21.0	27.0	20.5	15.0
37.5°	10.0	12.0	17.5	11.5	10.0
40°	6.5	8.0	11.0	8.0	6.5
42.5°	3.5	5.0	6.0	5.5	3.5
45°	2.0	3.0	4.0	3.0	2.0
47.5°	1.5	1.5	2.5	1.5	1.0
50°	1.0	1.0	1.5	1.0	1.0
52.5°	1.0	1.0	1.0	1.0	1.0
55°	1.0	1.0	1.0	1.0	1.0
57.5°	1.0	1.0	1.0	1.0	1.0
60°	1.0	1.0	1.0	1.0	1.0
62.5°	1.0	1.0	1.0	1.0	1.0
65°	0.5	1.0	0.5	0.5	0.5
67.5°	0.5	0.5	0.5	0.5	0.5
70°	0.5	0.5	0.5	0.5	0.5
72.5°	0.5	0.5	0.5	0.5	0.5
75°	0.5	0.5	0.5	0.5	0.5
77.5°	0.5	0.5	0.5	0.5	0.5
80°	0.0	0.0	0.5	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1307668

CATALOG NUMBER: P3SQAS05R259030DE010 E3SQCD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)