

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1308633

Luminaire Tested: P3SQAS02R309035DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1308633
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-24)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R309035DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 90CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 322.0 lumens
Efficiency: N/A
Efficacy: 89.4 lumens/watt
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1308633

CATALOG NUMBER: P3SQAS02R309035DE010 E3SQCD1MB

Luminous Intensity Polar Plot

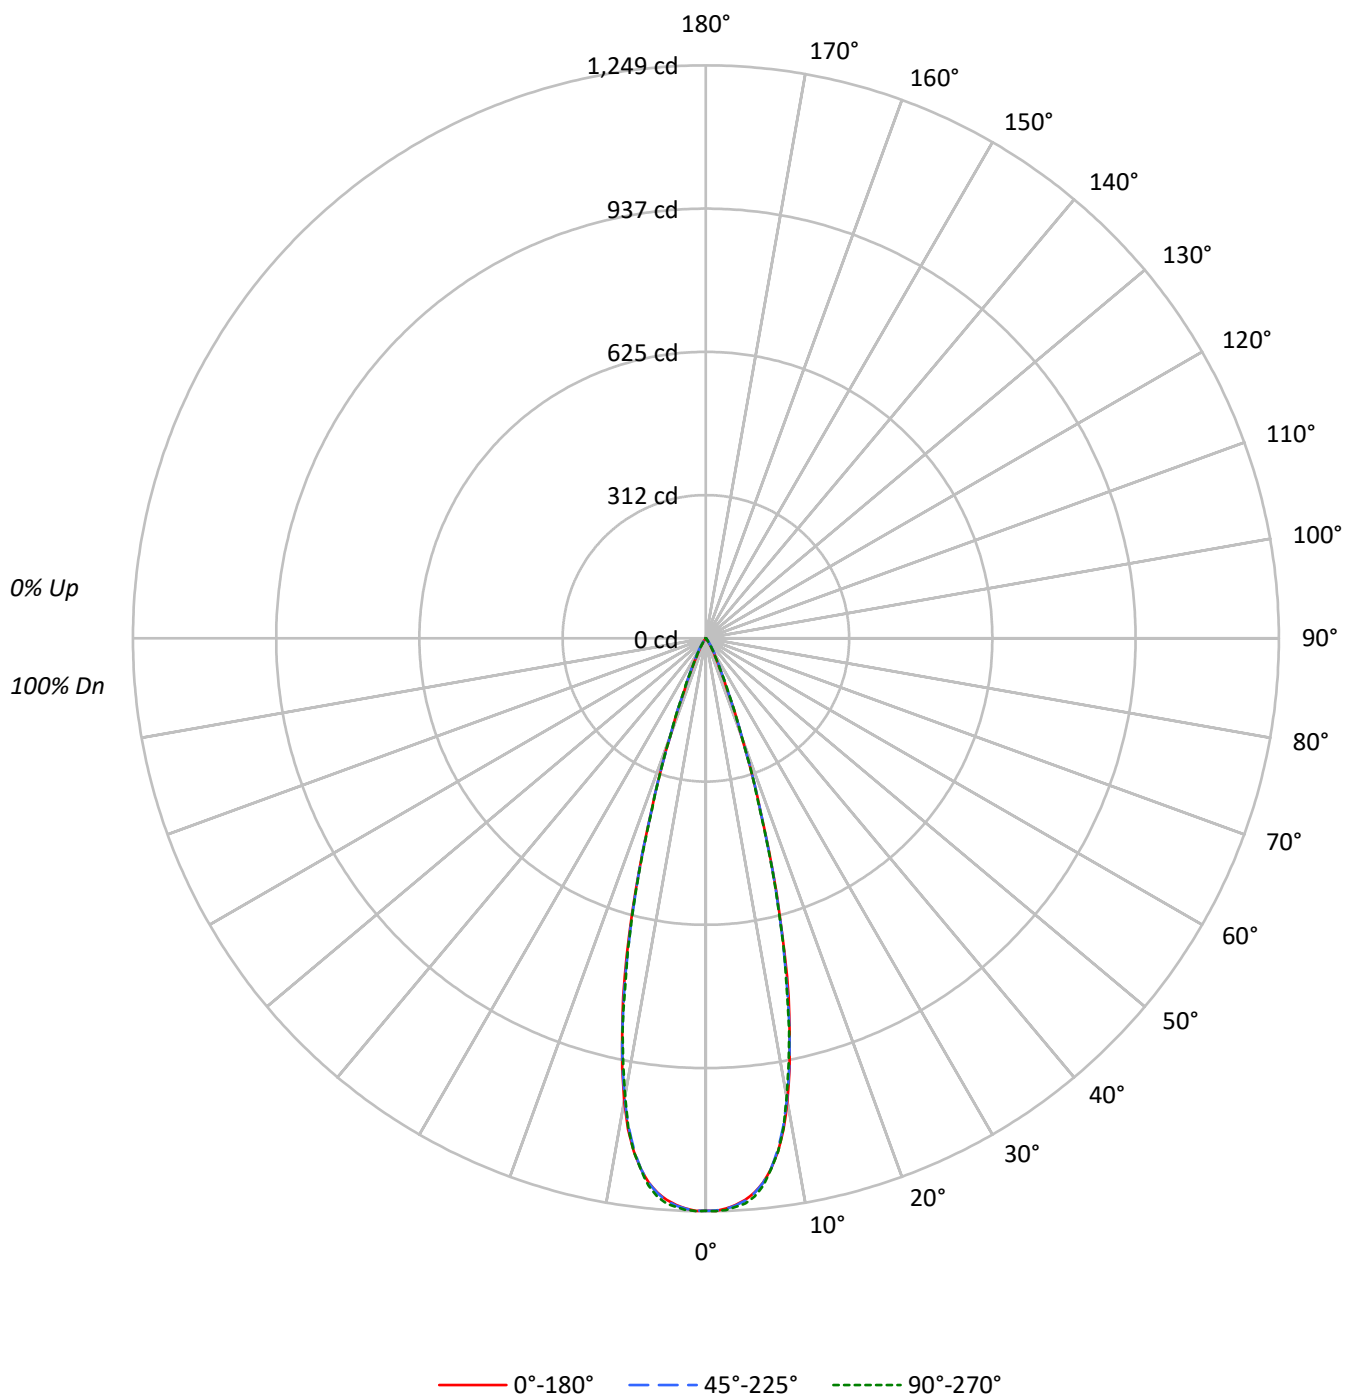

TEST NUMBER: P1308633

CATALOG NUMBER: P3SQAS02R309035DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	102	101		100
2	112	108	105	103	109	106	104	102	103	101	99		100	99	97		98
3	108	104	100	97	106	102	99	97	100	97	95		98	95	94		95
4	105	100	96	93	103	99	95	92	97	94	91		95	92	90		93
5	102	96	92	89	101	95	92	89	94	91	88		92	90	87		91
6	99	93	89	86	98	92	89	86	91	88	85		90	87	85		89
7	96	90	86	83	95	90	86	83	89	85	83		87	85	82		87
8	94	88	83	81	93	87	83	81	86	83	80		85	82	80		84
9	91	85	81	78	91	85	81	78	84	80	78		83	80	78		82
10	89	83	79	76	88	82	79	76	82	78	76		81	78	76		80

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	214917	214917	214917
5°	209669	209929	211104
10°	179077	178255	177188
15°	110509	109225	109618
20°	41768	41988	41952
25°	12846	14081	13416
30°	5171	6582	5369
35°	1535	2796	1577
40°	629	1124	629
45°	122	365	122
50°	0	80	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 365 cd/sqm

TEST NUMBER: P1308633

CATALOG NUMBER: P3SQAS02R309035DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.1	34.2
10°-20°	163.0	50.6
20°-30°	40.4	12.6
30°-40°	7.6	2.4
40°-50°	1.0	0.3
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	313.4	97.3
0°-40°	321.0	99.7
0°-60°	322.0	100.0
0°-90°	322.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	322.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1248	1248	1248	1248	1248	
5°	1213	1212	1214	1216	1221	110
15°	620	614	613	617	615	164
25°	68	72	74	74	71	39
35°	7	10	13	10	8	6
45°	0	1	2	1	0	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1308633

CATALOG NUMBER: P3SQAS02R309035DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1247.9	1247.9	1247.9	1247.9	1247.9
1°	1248.4	1247.4	1247.4	1245.9	1248.7
2°	1243.9	1242.9	1244.6	1243.4	1246.9
3°	1237.1	1235.9	1238.4	1239.1	1240.9
4°	1227.1	1226.1	1228.9	1230.4	1235.1
5°	1212.8	1212.3	1214.3	1216.3	1221.1
6°	1193.3	1192.6	1193.8	1196.3	1199.3
7°	1165.0	1163.5	1164.5	1165.0	1165.8
8°	1129.2	1126.9	1125.7	1128.4	1129.9
9°	1083.1	1080.6	1077.9	1076.9	1080.4
10°	1024.0	1020.3	1019.3	1016.8	1013.2
11°	955.4	952.4	951.6	947.1	945.1
12°	876.8	875.3	877.0	874.3	873.3
13°	801.4	791.9	790.6	785.4	782.6
14°	712.2	703.5	703.2	700.5	704.2
15°	619.8	613.8	612.6	617.3	614.8
17.5°	395.2	399.2	398.2	395.7	391.4
20°	227.9	225.1	229.1	230.1	228.9
22.5°	121.5	122.5	123.2	126.2	128.2
25°	67.6	72.1	74.1	73.9	70.6
27.5°	42.1	44.8	48.6	46.1	43.3
30°	26.0	28.3	33.1	28.5	27.0
32.5°	14.0	17.8	21.3	17.8	14.5
35°	7.3	9.5	13.3	9.8	7.5
37.5°	4.8	5.5	8.5	5.5	4.8
40°	2.8	3.5	5.0	3.5	2.8
42.5°	1.3	2.0	2.8	2.0	1.3
45°	0.5	0.8	1.5	1.0	0.5
47.5°	0.0	0.3	0.8	0.3	0.0
50°	0.0	0.0	0.3	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1308633

CATALOG NUMBER: P3SQAS02R309035DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)