

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1308696

Luminaire Tested: P3SQAS02R559035DE010 E3SQCD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1308696
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R559035DE010 E3SQCD1MW
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 90CRI , E3SQCD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 330.1 lumens
Efficiency: N/A
Efficacy: 91.7 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1308696

CATALOG NUMBER: P3SQAS02R559035DE010 E3SQCD1MW

Luminous Intensity Polar Plot

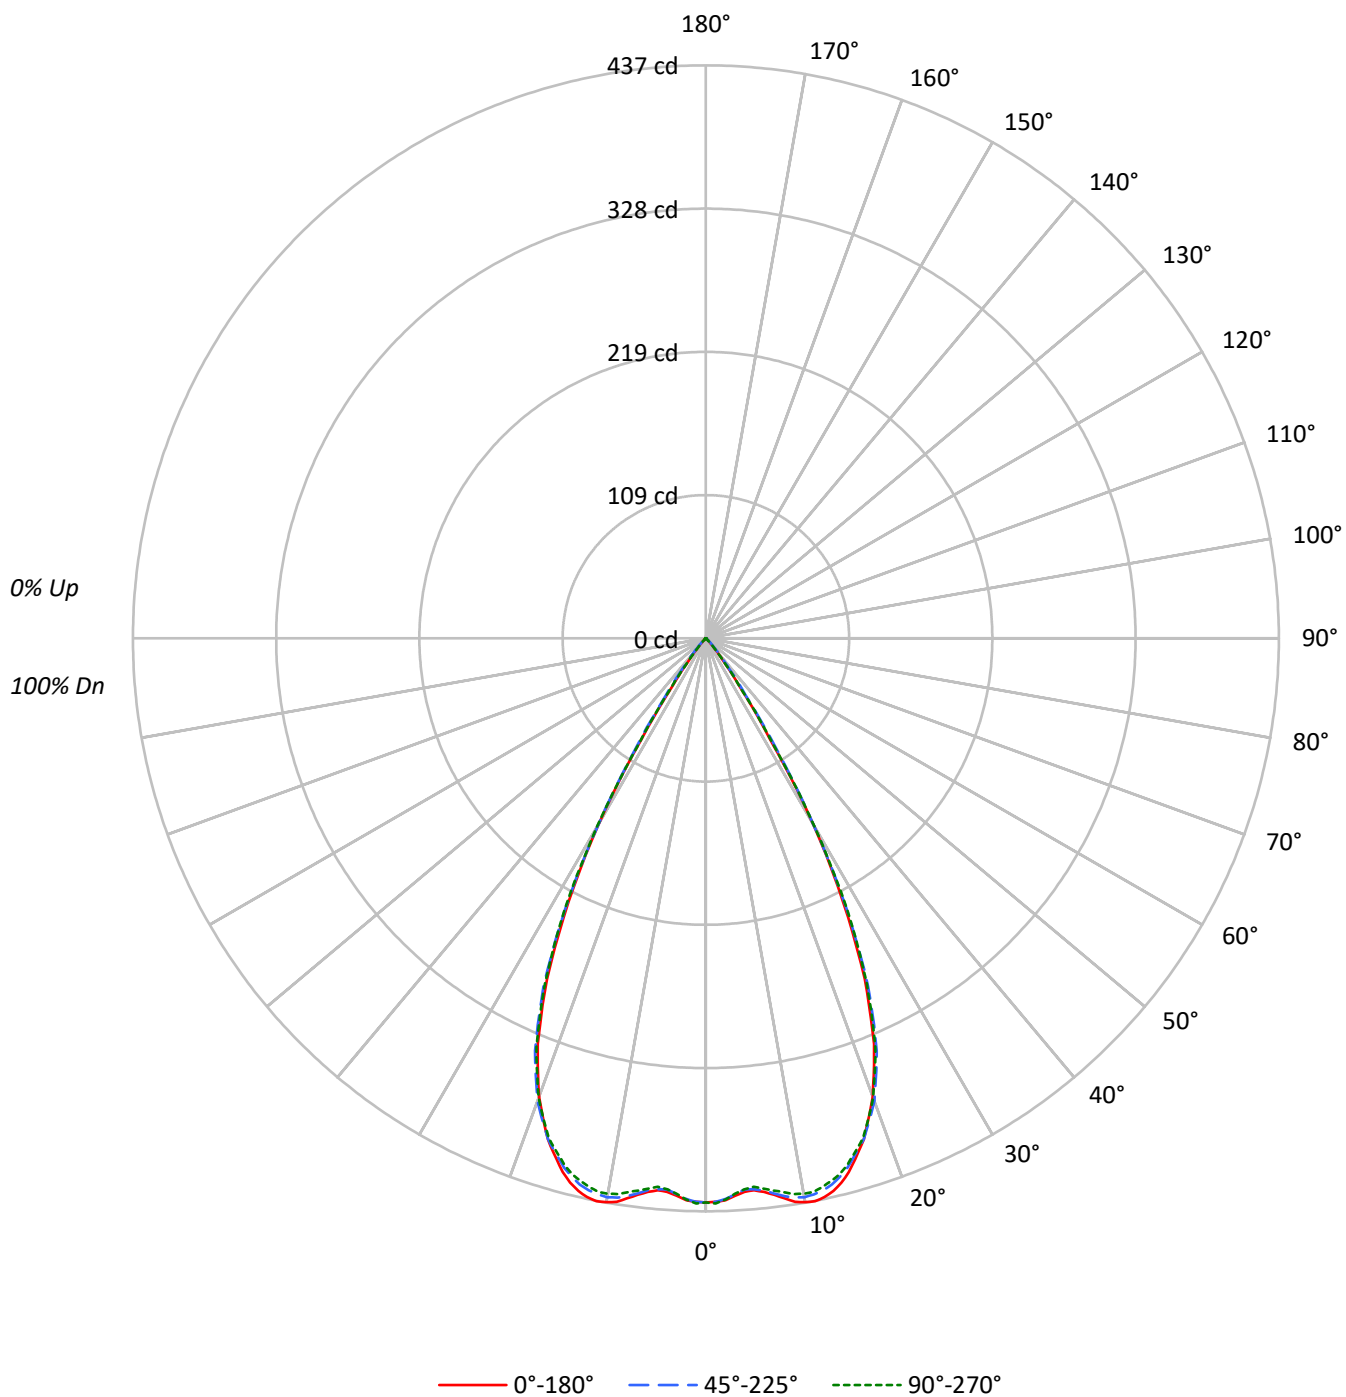

TEST NUMBER: P1308696

CATALOG NUMBER: P3SQAS02R559035DE010 E3SQCD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	98	94	90	102	97	93	90	94	91	88		92	89	87		90
4	100	93	88	84	98	92	87	83	90	86	83		88	84	82		86
5	95	88	82	79	94	87	82	78	85	81	78		83	80	77		82
6	91	83	78	74	90	82	77	74	81	76	73		79	76	73		78
7	87	79	73	69	86	78	73	69	77	72	69		76	72	69		75
8	83	75	69	66	82	74	69	66	73	69	65		72	68	65		71
9	80	71	66	62	79	71	66	62	70	65	62		69	65	62		68
10	77	68	62	59	76	67	62	59	67	62	59		66	62	59		65

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	74107	74107	74107
5°	73042	72921	72575
10°	76352	75688	75216
15°	75153	74493	74172
20°	68160	68838	68343
25°	54500	55640	55127
30°	32694	32694	33091
35°	9440	11185	9755
40°	2698	3665	2698
45°	609	1413	609
50°	268	482	214
55°	240	240	240
60°	276	276	276
65°	204	204	204
70°	252	252	252
75°	200	200	200
80°	298	298	298
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 1413 cd/sqm

TEST NUMBER: P1308696

CATALOG NUMBER: P3SQAS02R559035DE010 E3SQCD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.8	12.4
10°-20°	116.3	35.2
20°-30°	128.1	38.8
30°-40°	39.2	11.9
40°-50°	3.9	1.2
50°-60°	0.8	0.2
60°-70°	0.6	0.2
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	285.2	86.4
0°-40°	324.4	98.3
0°-60°	329.1	99.7
0°-90°	330.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	330.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	430	430	430	430	430	
5°	422	422	422	420	420	41
15°	422	421	418	416	416	117
25°	287	290	293	296	290	126
35°	45	47	53	49	46	37
45°	2	4	6	4	2	3
55°	1	1	1	1	1	1
65°	0	0	0	0	0	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1308696

CATALOG NUMBER: P3SQAS02R559035DE010 E3SQCD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	430.3	430.3	430.3	430.3	430.3
1°	429.8	430.1	429.8	429.3	431.1
2°	428.8	428.6	427.8	427.6	428.3
3°	425.6	425.6	424.6	424.1	424.3
4°	423.1	423.1	421.5	421.0	421.3
5°	422.5	422.5	421.8	420.5	419.8
6°	424.6	425.1	423.3	422.0	422.0
7°	427.6	427.8	426.6	424.8	424.3
8°	431.3	431.6	429.6	427.6	426.6
9°	435.1	434.6	431.8	429.8	429.1
10°	436.6	436.4	432.8	430.8	430.1
11°	437.4	436.1	432.1	430.3	430.1
12°	435.6	434.6	430.3	428.6	427.8
13°	432.6	431.1	427.6	425.8	424.8
14°	427.8	426.3	423.1	421.0	421.3
15°	421.5	420.8	417.8	416.0	416.0
17.5°	400.7	401.2	400.5	399.7	399.2
20°	371.9	373.9	375.6	374.6	372.9
22.5°	335.0	338.5	340.5	341.0	337.7
25°	286.8	289.6	292.8	295.6	290.1
27.5°	226.8	229.3	232.4	234.1	233.4
30°	164.4	164.6	164.4	167.6	166.4
32.5°	91.3	98.9	100.1	102.4	94.3
35°	44.9	47.2	53.2	48.9	46.4
37.5°	21.6	23.1	28.9	23.6	22.6
40°	12.0	13.0	16.3	13.5	12.0
42.5°	5.8	7.5	8.8	7.8	5.8
45°	2.5	3.8	5.8	3.8	2.5
47.5°	1.0	1.5	3.5	1.5	1.0
50°	1.0	0.8	1.8	0.8	0.8
52.5°	0.8	0.8	1.0	0.8	0.8
55°	0.8	0.8	0.8	0.8	0.8
57.5°	0.8	0.8	0.8	0.8	0.8
60°	0.8	0.8	0.8	0.8	0.8
62.5°	0.5	0.8	0.8	0.8	0.5
65°	0.5	0.5	0.5	0.5	0.5
67.5°	0.5	0.5	0.5	0.5	0.5
70°	0.5	0.5	0.5	0.5	0.5
72.5°	0.3	0.5	0.3	0.3	0.3
75°	0.3	0.3	0.3	0.3	0.3
77.5°	0.3	0.3	0.3	0.3	0.3
80°	0.3	0.3	0.3	0.3	0.3
82.5°	0.3	0.3	0.3	0.3	0.3
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1308696

CATALOG NUMBER: P3SQAS02R559035DE010 E3SQCD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)