

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1309020

Luminaire Tested: P3SQAS09R559035DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1309020
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R559035DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 90CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 981.0 lumens
Efficiency: N/A
Efficacy: 88.4 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.81
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1309020

CATALOG NUMBER: P3SQAS09R559035DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

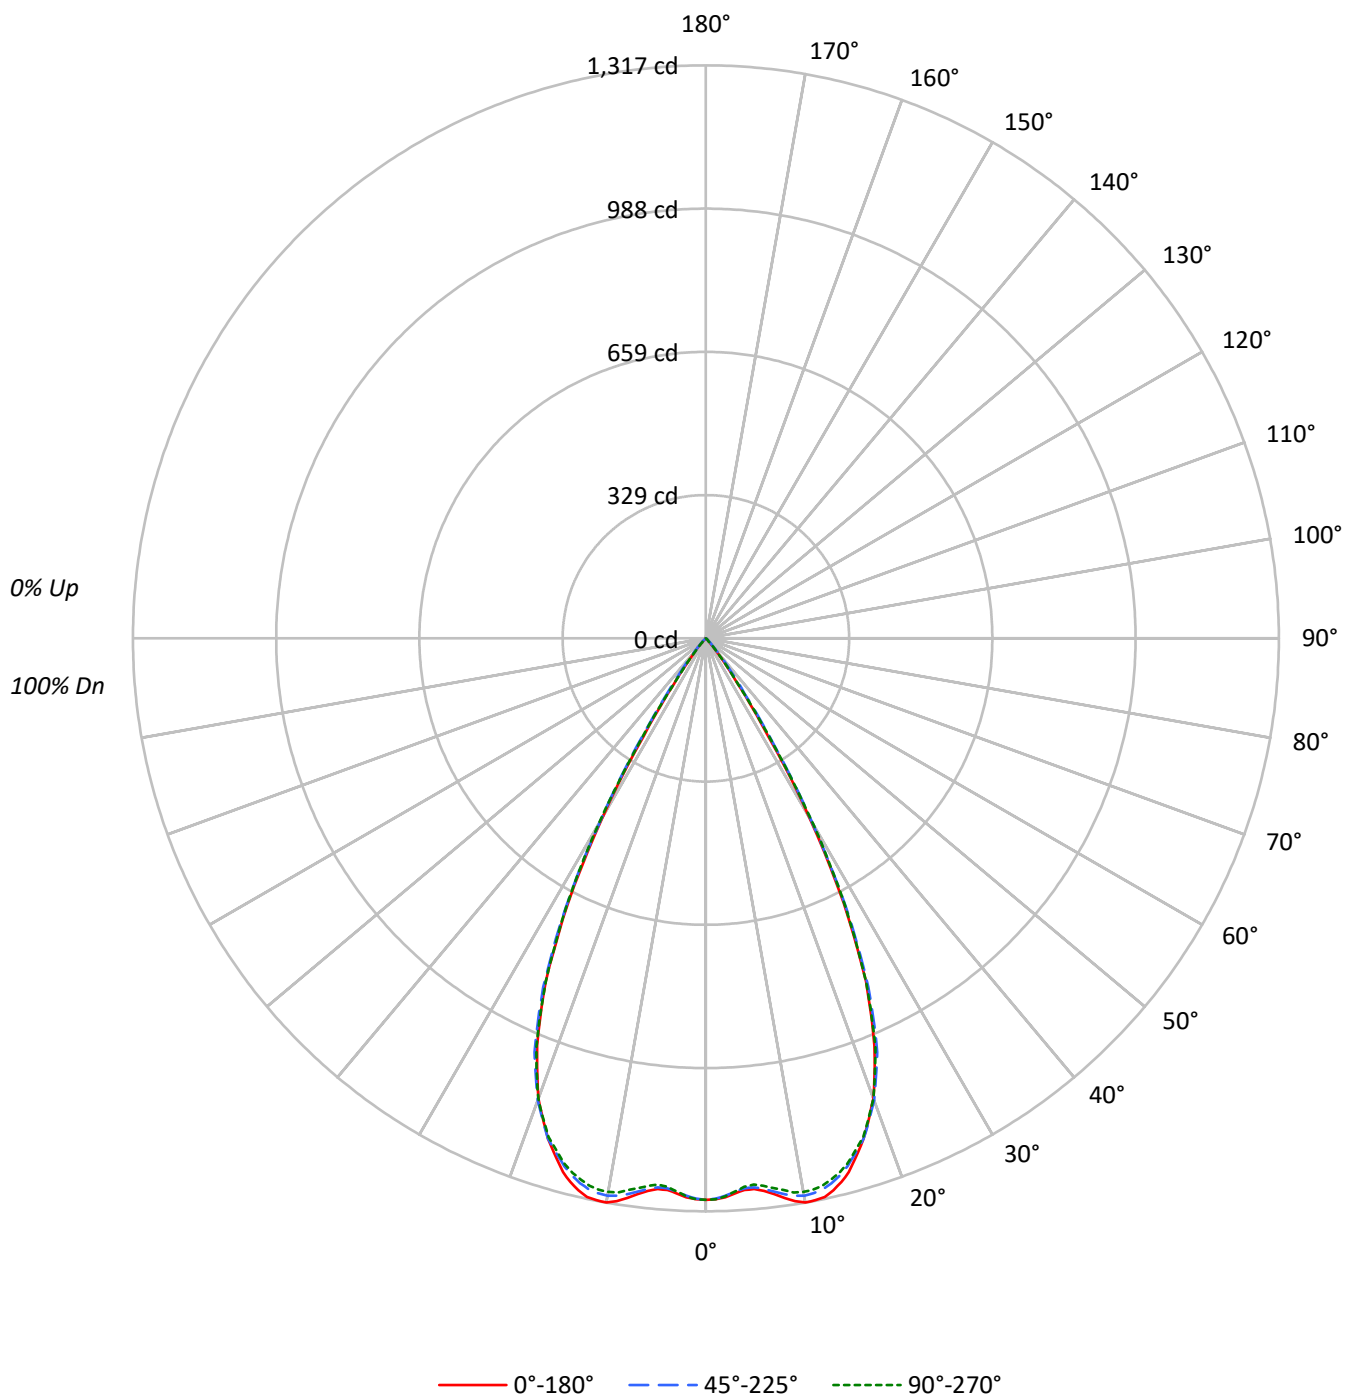

TEST NUMBER: P1309020

CATALOG NUMBER: P3SQAS09R559035DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	103	97	93	90	95	91	89		92	90	87		90
4	100	93	88	84	98	92	87	84	90	86	83		88	85	82		86
5	96	88	83	79	94	87	82	79	85	81	78		84	80	77		82
6	91	83	78	74	90	83	78	74	81	77	74		80	76	73		79
7	87	79	74	70	86	79	73	70	77	73	69		76	72	69		75
8	84	75	70	66	83	75	70	66	74	69	66		73	69	65		72
9	80	72	66	63	79	71	66	63	70	66	62		69	65	62		69
10	77	68	63	59	76	68	63	59	67	62	59		66	62	59		66

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	222236	222236	222236
5°	219697	219040	217864
10°	230264	227501	225927
15°	226438	224031	223211
20°	206258	207083	206387
25°	165475	168041	165475
30°	94978	97365	98120
35°	27080	32630	27878
40°	6947	9982	7104
45°	731	3483	560
50°	0	616	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 3483 cd/sqm

TEST NUMBER: P1309020

CATALOG NUMBER: P3SQAS09R559035DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.5	12.5
10°-20°	349.6	35.6
20°-30°	385.1	39.3
30°-40°	115.0	11.7
40°-50°	8.8	0.9
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	857.2	87.4
0°-40°	972.1	99.1
0°-60°	981.0	100.0
0°-90°	981.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	981.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1290	1290	1290	1290	1290	
5°	1271	1268	1267	1262	1260	123
15°	1270	1261	1256	1251	1252	352
25°	871	871	884	883	871	381
35°	129	137	155	142	133	106
45°	3	8	14	8	2	6
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1309020

CATALOG NUMBER: P3SQAS09R559035DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1290.4	1290.4	1290.4	1290.4	1290.4
1°	1289.6	1289.6	1288.1	1287.3	1289.6
2°	1285.8	1285.8	1282.1	1281.3	1283.6
3°	1277.5	1276.8	1273.8	1271.5	1273.0
4°	1270.8	1269.3	1267.0	1263.2	1264.0
5°	1270.8	1268.5	1267.0	1261.7	1260.2
6°	1276.8	1275.3	1272.3	1267.0	1265.5
7°	1287.3	1284.3	1281.3	1274.5	1273.0
8°	1298.6	1296.4	1290.4	1283.6	1280.6
9°	1309.9	1304.7	1297.1	1290.4	1289.6
10°	1316.7	1309.2	1300.9	1292.6	1291.9
11°	1316.0	1309.2	1299.4	1291.9	1291.1
12°	1313.0	1303.2	1294.9	1285.8	1286.6
13°	1302.4	1293.4	1285.1	1278.3	1276.8
14°	1288.1	1279.8	1272.3	1265.5	1266.2
15°	1270.0	1261.0	1256.5	1251.2	1251.9
17.5°	1206.0	1203.7	1206.0	1200.0	1202.2
20°	1125.4	1123.1	1129.9	1126.9	1126.1
22.5°	1013.1	1016.2	1029.0	1025.2	1018.4
25°	870.8	870.8	884.3	882.8	870.8
27.5°	685.5	690.7	699.0	702.8	693.8
30°	477.6	489.6	489.6	497.2	493.4
32.5°	266.7	292.3	298.3	302.1	287.0
35°	128.8	137.1	155.2	141.6	132.6
37.5°	61.8	65.5	83.6	67.8	63.3
40°	30.9	35.4	44.4	36.9	31.6
42.5°	12.8	18.8	23.4	18.8	12.8
45°	3.0	7.5	14.3	7.5	2.3
47.5°	0.0	0.8	6.8	1.5	0.0
50°	0.0	0.0	2.3	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1309020

CATALOG NUMBER: P3SQAS09R559035DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)