

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1309940

Luminaire Tested: P3SQAS05R359040DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1309940
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R359040DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 90CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 625.0 lumens
Efficiency: N/A
Efficacy: 86.8 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1309940

CATALOG NUMBER: P3SQAS05R359040DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

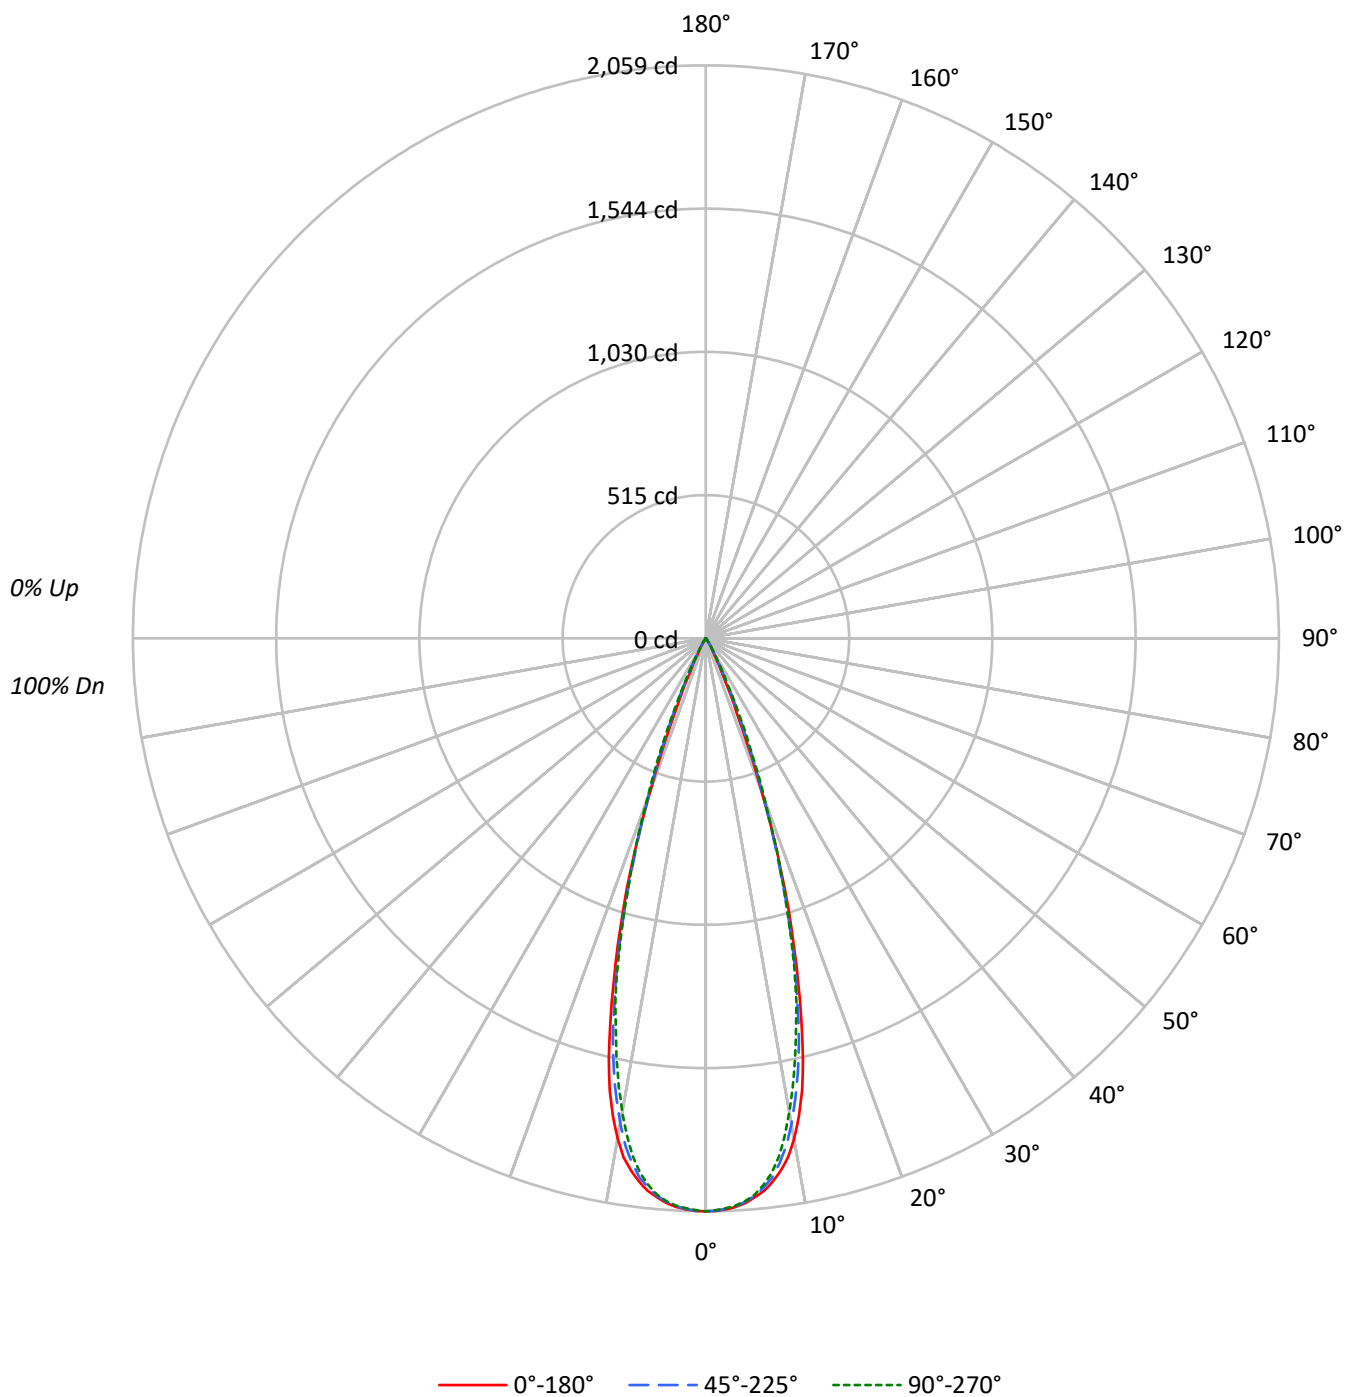

TEST NUMBER: P1309940

CATALOG NUMBER: P3SQAS05R359040DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100
2	111	108	105	102	109	106	103	101	103	101	99		100	98	97		97
3	108	103	100	97	106	102	99	96	99	97	94		97	95	93		95
4	104	99	95	92	103	98	94	92	96	93	91		94	92	90		93
5	101	95	91	88	100	95	91	88	93	90	87		92	89	87		90
6	98	92	88	85	97	91	88	85	90	87	84		89	86	84		88
7	96	89	85	82	94	89	85	82	87	84	81		86	83	81		85
8	93	86	82	79	92	86	82	79	85	81	79		84	81	79		83
9	90	84	80	77	89	83	79	77	82	79	76		82	79	76		81
10	88	81	77	75	87	81	77	74	80	77	74		80	76	74		79

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	354641	354641	354641
5°	348544	347801	347058
10°	319435	309834	302297
15°	228739	221446	218754
20°	106062	109709	113558
25°	25160	35801	37340
30°	7378	8452	9526
35°	1703	2712	2481
40°	360	719	495
45°	122	122	122
50°	134	0	134
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 141 cd/sqm

TEST NUMBER: P1309940

CATALOG NUMBER: P3SQAS05R359040DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	184.9	29.6
10°-20°	330.5	52.9
20°-30°	99.4	15.9
30°-40°	9.5	1.5
40°-50°	0.6	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	614.8	98.4
0°-40°	624.3	99.9
0°-60°	625.0	100.0
0°-90°	625.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	625.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2059	2059	2059	2059	2059	
5°	2016	2016	2012	2009	2008	187
15°	1283	1273	1242	1237	1227	339
25°	132	146	188	196	196	85
35°	8	11	13	14	12	7
45°	0	0	0	0	0	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1309940

CATALOG NUMBER: P3SQAS05R359040DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2059.2	2059.2	2059.2	2059.2	2059.2
1°	2058.1	2058.1	2057.0	2057.0	2054.9
2°	2053.2	2053.8	2051.6	2051.1	2049.5
3°	2045.7	2044.1	2044.1	2043.0	2041.9
4°	2033.9	2030.6	2029.5	2030.1	2027.9
5°	2016.1	2015.6	2011.8	2009.1	2007.5
6°	1996.7	1992.9	1984.9	1977.9	1976.3
7°	1967.6	1959.6	1952.6	1938.0	1935.9
8°	1932.1	1919.2	1904.1	1883.7	1882.6
9°	1888.5	1867.5	1846.5	1819.1	1809.4
10°	1826.6	1807.2	1771.7	1747.5	1728.6
11°	1749.6	1725.4	1683.9	1654.9	1639.3
12°	1662.4	1639.8	1591.3	1565.0	1542.9
13°	1550.4	1531.6	1486.4	1457.3	1440.1
14°	1420.7	1406.7	1363.6	1350.7	1344.8
15°	1282.9	1273.2	1242.0	1236.6	1226.9
17.5°	944.3	928.1	910.3	913.6	916.8
20°	578.7	601.3	598.6	610.5	619.6
22.5°	288.6	317.6	351.5	372.0	382.2
25°	132.4	145.9	188.4	196.5	196.5
27.5°	66.8	70.0	88.8	90.4	94.7
30°	37.1	39.8	42.5	47.4	47.9
32.5°	18.8	22.1	23.1	25.8	24.8
35°	8.1	10.8	12.9	14.0	11.8
37.5°	3.8	4.8	7.0	6.5	4.8
40°	1.6	2.2	3.2	2.7	2.2
42.5°	1.1	1.1	1.6	1.1	1.1
45°	0.5	0.5	0.5	0.5	0.5
47.5°	0.5	0.5	0.0	0.5	0.5
50°	0.5	0.0	0.0	0.0	0.5
52.5°	0.5	0.0	0.0	0.0	0.5
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1309940

CATALOG NUMBER: P3SQAS05R359040DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)