

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1310037

Luminaire Tested: P3SQAS09R159040DE010 E3SQPHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1310037
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R159040DE010 E3SQPHLP1MW
Description: 3in Adjustable LED luminaire with, R15 optic, 4000K CCT AND, 90CRI , E3SQPHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 435.0 lumens
Efficiency: N/A
Efficacy: 39.2 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.63
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1310037

CATALOG NUMBER: P3SQAS09R159040DE010 E3SQPHLP1MW

Luminous Intensity Polar Plot

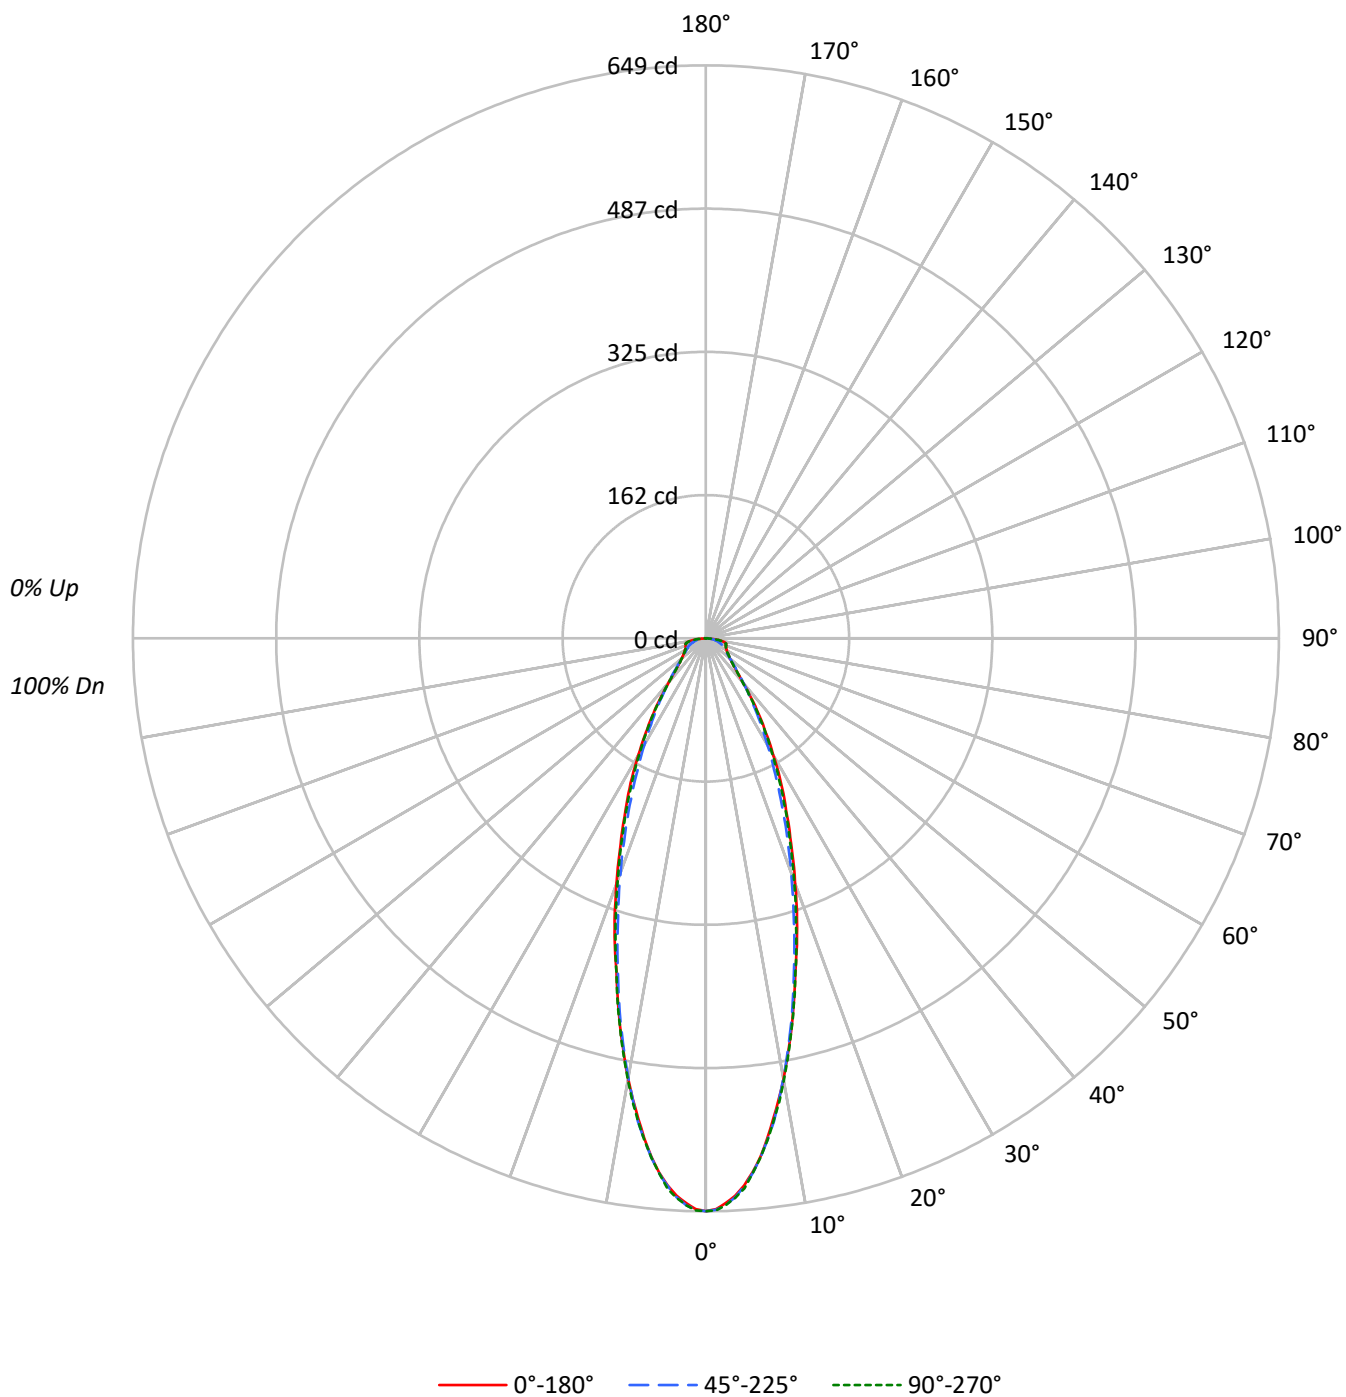

TEST NUMBER: P1310037

CATALOG NUMBER: P3SQAS09R159040DE010 E3SQPHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	108	104	101	109	105	102	100	101	99	96		97	95	94		94
2	104	98	93	88	102	96	91	87	93	89	85		90	86	83		87
3	98	90	84	79	96	88	83	78	86	81	77		83	79	76		81
4	92	83	76	71	90	82	76	71	80	74	70		77	73	69		75
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67
7	78	68	61	56	77	67	60	56	66	60	56		64	59	55		63
8	74	64	57	52	73	63	57	52	62	56	52		61	56	52		60
9	71	60	54	49	70	60	53	49	59	53	49		58	53	49		57
10	68	57	51	47	67	57	51	47	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	111755	111755	111755
5°	104956	105094	105094
10°	88664	88384	88926
15°	69732	68734	69875
20°	54195	51739	53461
25°	40894	38062	40305
30°	30426	27762	29790
35°	21718	20226	21382
40°	14703	14883	14546
45°	10936	11520	10936
50°	9512	9512	9512
55°	9218	8768	9218
60°	9507	8680	9231
65°	10269	9006	10269
70°	12287	9114	12287
75°	15770	9449	15770
80°	19538	10116	18745
85°	15611	9287	17191

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 19538 cd/sqm

TEST NUMBER: P1310037

CATALOG NUMBER: P3SQAS09R159040DE010 E3SQPHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.7	12.6
10°-20°	108.2	24.9
20°-30°	95.6	22.0
30°-40°	62.8	14.4
40°-50°	36.7	8.4
50°-60°	27.0	6.2
60°-70°	23.0	5.3
70°-80°	19.0	4.4
80°-90°	7.9	1.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	258.5	59.4
0°-40°	321.4	73.9
0°-60°	385.1	88.5
0°-90°	435.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	435.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	649	649	649	649	649	
5°	607	607	608	609	608	55
15°	391	391	386	390	392	109
25°	215	208	200	206	212	100
35°	103	99	96	99	102	65
45°	45	46	47	46	45	36
55°	31	30	29	30	31	28
65°	25	23	22	23	25	25
75°	24	17	14	18	24	24
85°	8	9	5	8	9	9
90°	0	0	0	0	0	

TEST NUMBER: P1310037

CATALOG NUMBER: P3SQAS09R159040DE010 E3SQPHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	648.9	648.9	648.9	648.9	648.9
1°	646.5	647.3	647.3	648.1	648.1
2°	640.2	641.8	642.6	642.6	642.6
3°	632.3	633.1	633.9	634.7	634.7
4°	621.3	622.1	622.1	623.7	624.4
5°	607.1	607.1	607.9	608.7	607.9
6°	590.5	590.5	591.3	591.3	591.3
7°	570.8	571.6	572.4	573.2	572.4
8°	549.5	550.3	552.7	552.7	551.9
9°	528.3	529.0	529.0	531.4	531.4
10°	507.0	507.0	505.4	507.0	508.5
12.5°	449.4	448.6	446.3	448.6	450.2
15°	391.1	391.1	385.5	390.3	391.9
17.5°	343.8	336.7	331.1	335.9	339.8
20°	295.7	288.6	282.3	287.0	291.7
22.5°	252.3	246.8	238.9	243.6	249.1
25°	215.2	208.1	200.3	205.8	212.1
27.5°	184.5	175.0	167.1	173.5	179.0
30°	153.0	146.7	139.6	144.3	149.8
32.5°	126.2	121.4	115.9	119.8	124.6
35°	103.3	99.3	96.2	98.6	101.7
37.5°	82.8	81.2	79.6	80.4	80.4
40°	65.4	66.2	66.2	66.2	64.7
42.5°	53.6	54.4	56.0	54.4	53.6
45°	44.9	45.7	47.3	45.7	44.9
47.5°	39.4	40.2	41.0	39.4	39.4
50°	35.5	35.5	35.5	35.5	35.5
52.5°	33.1	32.3	32.3	32.3	33.1
55°	30.7	30.0	29.2	30.0	30.7
57.5°	28.4	27.6	26.8	27.6	28.4
60°	27.6	26.0	25.2	26.0	26.8
62.5°	26.0	24.4	23.7	24.4	26.0
65°	25.2	22.9	22.1	22.9	25.2
67.5°	24.4	21.3	19.7	21.3	24.4
70°	24.4	19.7	18.1	20.5	24.4
72.5°	23.7	18.9	15.8	18.9	23.7
75°	23.7	17.3	14.2	18.1	23.7
77.5°	22.1	15.8	11.8	16.6	22.1
80°	19.7	14.2	10.2	15.0	18.9
82.5°	14.2	11.8	7.9	11.8	14.2
85°	7.9	8.7	4.7	7.9	8.7
87.5°	0.8	2.4	1.6	4.7	3.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)