

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1310854

Luminaire Tested: P3SQAS02R309050DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1310854
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R309050DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 5000K CCT AND, 90CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 309.0 lumens
Efficiency: N/A
Efficacy: 85.8 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1310854

CATALOG NUMBER: P3SQAS02R309050DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

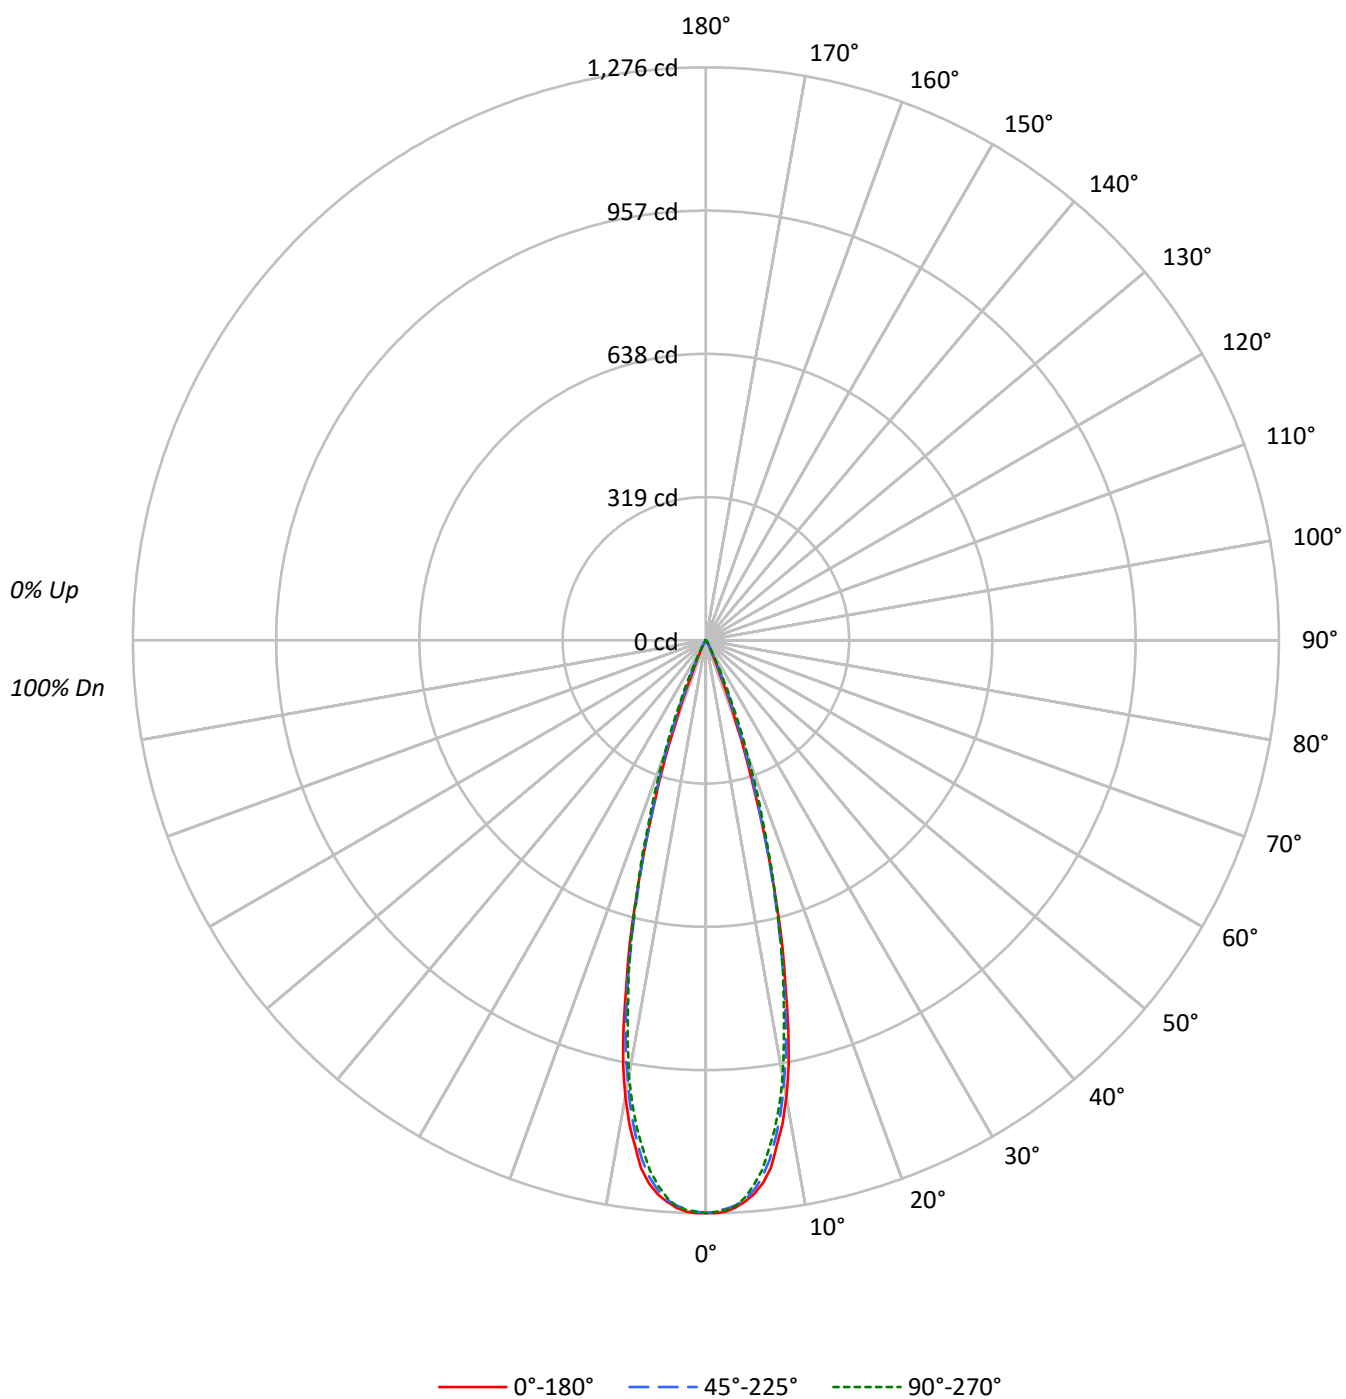

TEST NUMBER: P1310854

CATALOG NUMBER: P3SQAS02R309050DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	89	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	219636	219636	219636
5°	213974	212505	210741
10°	180581	175037	172186
15°	108815	105784	107728
20°	36912	42630	49173
25°	6784	10622	12561
30°	2327	2605	2923
35°	673	841	904
40°	180	292	247
45°	73	73	73
50°	80	0	80
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 52.5°
Luminance: 85 cd/sqm

TEST NUMBER: P1310854

CATALOG NUMBER: P3SQAS02R309050DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.3	35.7
10°-20°	161.2	52.2
20°-30°	34.1	11.0
30°-40°	3.1	1.0
40°-50°	0.3	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	305.5	98.9
0°-40°	308.7	99.9
0°-60°	309.0	100.0
0°-90°	309.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	309.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1275	1275	1275	1275	1275	
5°	1238	1235	1229	1225	1219	112
15°	610	608	593	607	604	161
25°	36	40	56	66	66	26
35°	3	4	4	5	4	3
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1310854

CATALOG NUMBER: P3SQAS02R309050DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1275.3	1275.3	1275.3	1275.3	1275.3
1°	1275.5	1274.2	1272.3	1275.0	1273.1
2°	1272.9	1269.7	1267.0	1269.7	1268.9
3°	1264.9	1262.2	1260.3	1261.7	1261.7
4°	1252.9	1249.9	1248.3	1248.6	1244.6
5°	1237.7	1235.3	1229.2	1225.4	1219.0
6°	1215.3	1209.5	1202.0	1195.9	1187.6
7°	1184.9	1175.9	1165.2	1154.6	1144.2
8°	1136.2	1131.9	1117.5	1110.4	1100.0
9°	1090.4	1080.0	1064.5	1052.8	1047.2
10°	1032.6	1017.1	1000.9	991.5	984.6
11°	964.1	948.4	935.3	921.7	911.1
12°	883.6	870.3	855.4	846.4	833.8
13°	788.3	786.4	769.6	766.7	765.1
14°	706.5	699.0	682.5	687.0	688.1
15°	610.3	608.2	593.3	607.1	604.2
17.5°	382.3	383.1	392.4	414.3	421.2
20°	201.4	207.5	232.6	258.9	268.3
22.5°	81.5	95.1	120.7	138.5	150.5
25°	35.7	40.0	55.9	65.8	66.1
27.5°	20.2	20.5	26.9	28.0	28.5
30°	11.7	12.0	13.1	13.9	14.7
32.5°	6.4	6.9	7.2	8.3	8.3
35°	3.2	4.0	4.0	4.8	4.3
37.5°	1.9	2.1	2.4	2.4	2.1
40°	0.8	1.1	1.3	1.3	1.1
42.5°	0.3	0.5	0.5	0.5	0.8
45°	0.3	0.3	0.3	0.3	0.3
47.5°	0.3	0.3	0.0	0.3	0.3
50°	0.3	0.0	0.0	0.0	0.3
52.5°	0.3	0.0	0.0	0.0	0.3
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1310854
CATALOG NUMBER: P3SQAS02R309050DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)