

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1310871

Luminaire Tested: P3SQAS02R359050DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1310871
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R359050DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 5000K CCT AND, 90CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 309.0 lumens
Efficiency: N/A
Efficacy: 85.8 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1310871

CATALOG NUMBER: P3SQAS02R359050DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

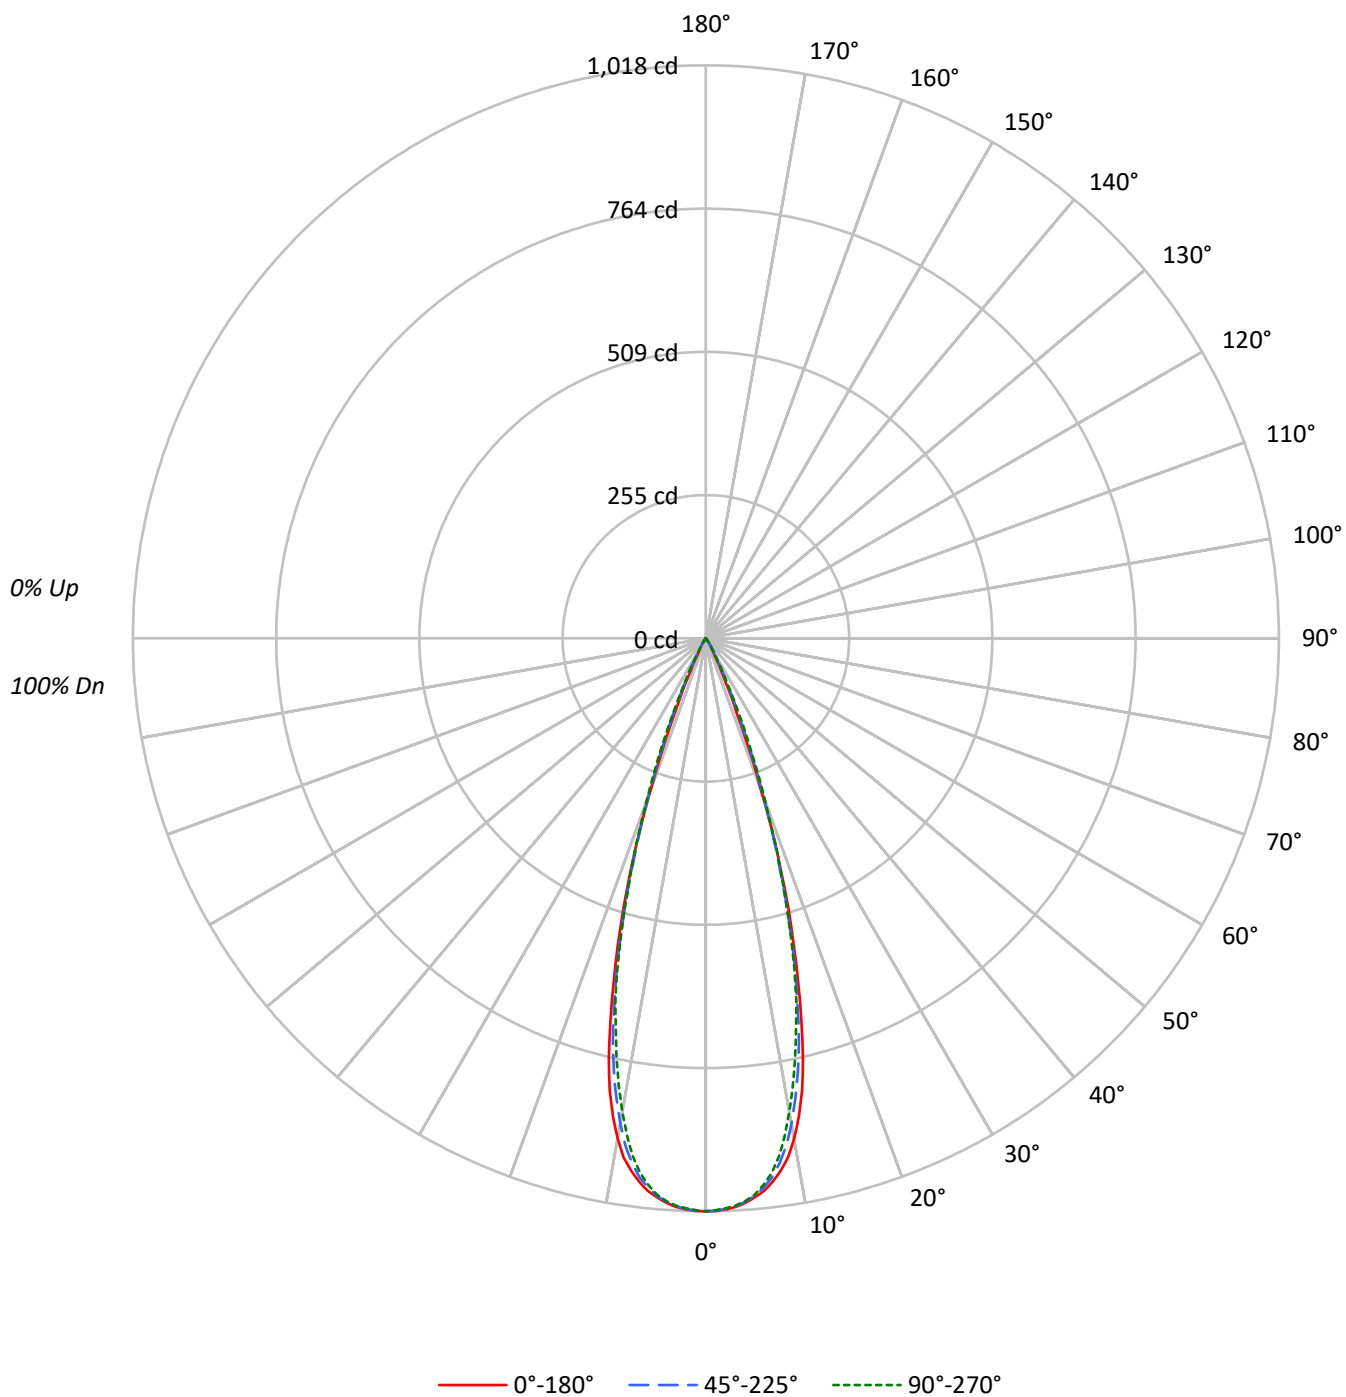

TEST NUMBER: P1310871

CATALOG NUMBER: P3SQAS02R359050DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100
2	111	108	105	102	109	106	103	101	103	101	99		100	98	97		97
3	108	103	100	97	106	102	99	96	99	97	94		97	95	93		95
4	104	99	95	92	103	98	94	92	96	93	91		94	92	90		93
5	101	95	91	88	100	95	91	88	93	90	87		92	89	87		90
6	98	92	88	85	97	91	88	85	90	87	84		89	86	84		88
7	96	89	85	82	94	89	85	82	87	84	81		86	83	81		85
8	93	86	82	79	92	86	82	79	85	81	79		84	81	79		83
9	90	84	80	77	89	83	79	77	82	79	76		82	79	76		81
10	88	81	77	75	87	81	77	74	80	77	74		80	76	74		79

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	175323	175323	175323
5°	172327	171947	171584
10°	157934	153177	149452
15°	113094	109475	108156
20°	52435	54250	56137
25°	12447	17710	18452
30°	3659	4176	4713
35°	841	1346	1240
40°	180	360	247
45°	73	73	73
50°	80	0	80
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 52.5°
Luminance: 85 cd/sqm

TEST NUMBER: P1310871

CATALOG NUMBER: P3SQAS02R359050DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.4	29.6
10°-20°	163.4	52.9
20°-30°	49.2	15.9
30°-40°	4.7	1.5
40°-50°	0.3	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	304.0	98.4
0°-40°	308.7	99.9
0°-60°	309.0	100.0
0°-90°	309.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	309.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1018	1018	1018	1018	1018	
5°	997	996	995	993	992	92
15°	634	630	614	611	607	168
25°	66	72	93	97	97	42
35°	4	5	6	7	6	4
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1310871

CATALOG NUMBER: P3SQAS02R359050DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1018.0	1018.0	1018.0	1018.0	1018.0
1°	1017.5	1017.5	1017.0	1017.0	1015.9
2°	1015.1	1015.4	1014.3	1014.1	1013.3
3°	1011.4	1010.6	1010.6	1010.1	1009.5
4°	1005.5	1003.9	1003.4	1003.7	1002.6
5°	996.8	996.5	994.6	993.3	992.5
6°	987.2	985.3	981.3	977.9	977.1
7°	972.8	968.8	965.3	958.2	957.1
8°	955.2	948.8	941.4	931.3	930.7
9°	933.7	923.3	912.9	899.3	894.6
10°	903.1	893.5	875.9	863.9	854.6
11°	865.0	853.0	832.5	818.2	810.4
12°	821.9	810.7	786.8	773.7	762.8
13°	766.5	757.2	734.9	720.5	712.0
14°	702.4	695.5	674.2	667.8	664.9
15°	634.3	629.5	614.0	611.4	606.6
17.5°	466.8	458.9	450.1	451.7	453.3
20°	286.1	297.3	296.0	301.8	306.3
22.5°	142.7	157.0	173.8	183.9	189.0
25°	65.5	72.1	93.2	97.1	97.1
27.5°	33.0	34.6	43.9	44.7	46.8
30°	18.4	19.7	21.0	23.4	23.7
32.5°	9.3	10.9	11.4	12.8	12.2
35°	4.0	5.3	6.4	6.9	5.9
37.5°	1.9	2.4	3.5	3.2	2.4
40°	0.8	1.1	1.6	1.3	1.1
42.5°	0.5	0.5	0.8	0.5	0.5
45°	0.3	0.3	0.3	0.3	0.3
47.5°	0.3	0.3	0.0	0.3	0.3
50°	0.3	0.0	0.0	0.0	0.3
52.5°	0.3	0.0	0.0	0.0	0.3
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1310871

CATALOG NUMBER: P3SQAS02R359050DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)