

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1310884

Luminaire Tested: P3SQAS02R409050DE010 E3SQCD1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1310884
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R409050DE010 E3SQCD1MB
Description: 3in Adjustable LED luminaire with, R40 optic, 5000K CCT AND, 90CRI , E3SQCD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 378.0 lumens
Efficiency: N/A
Efficacy: 105.0 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.69 / 0.6
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1310884

CATALOG NUMBER: P3SQAS02R409050DE010 E3SQCD1MB

Luminous Intensity Polar Plot

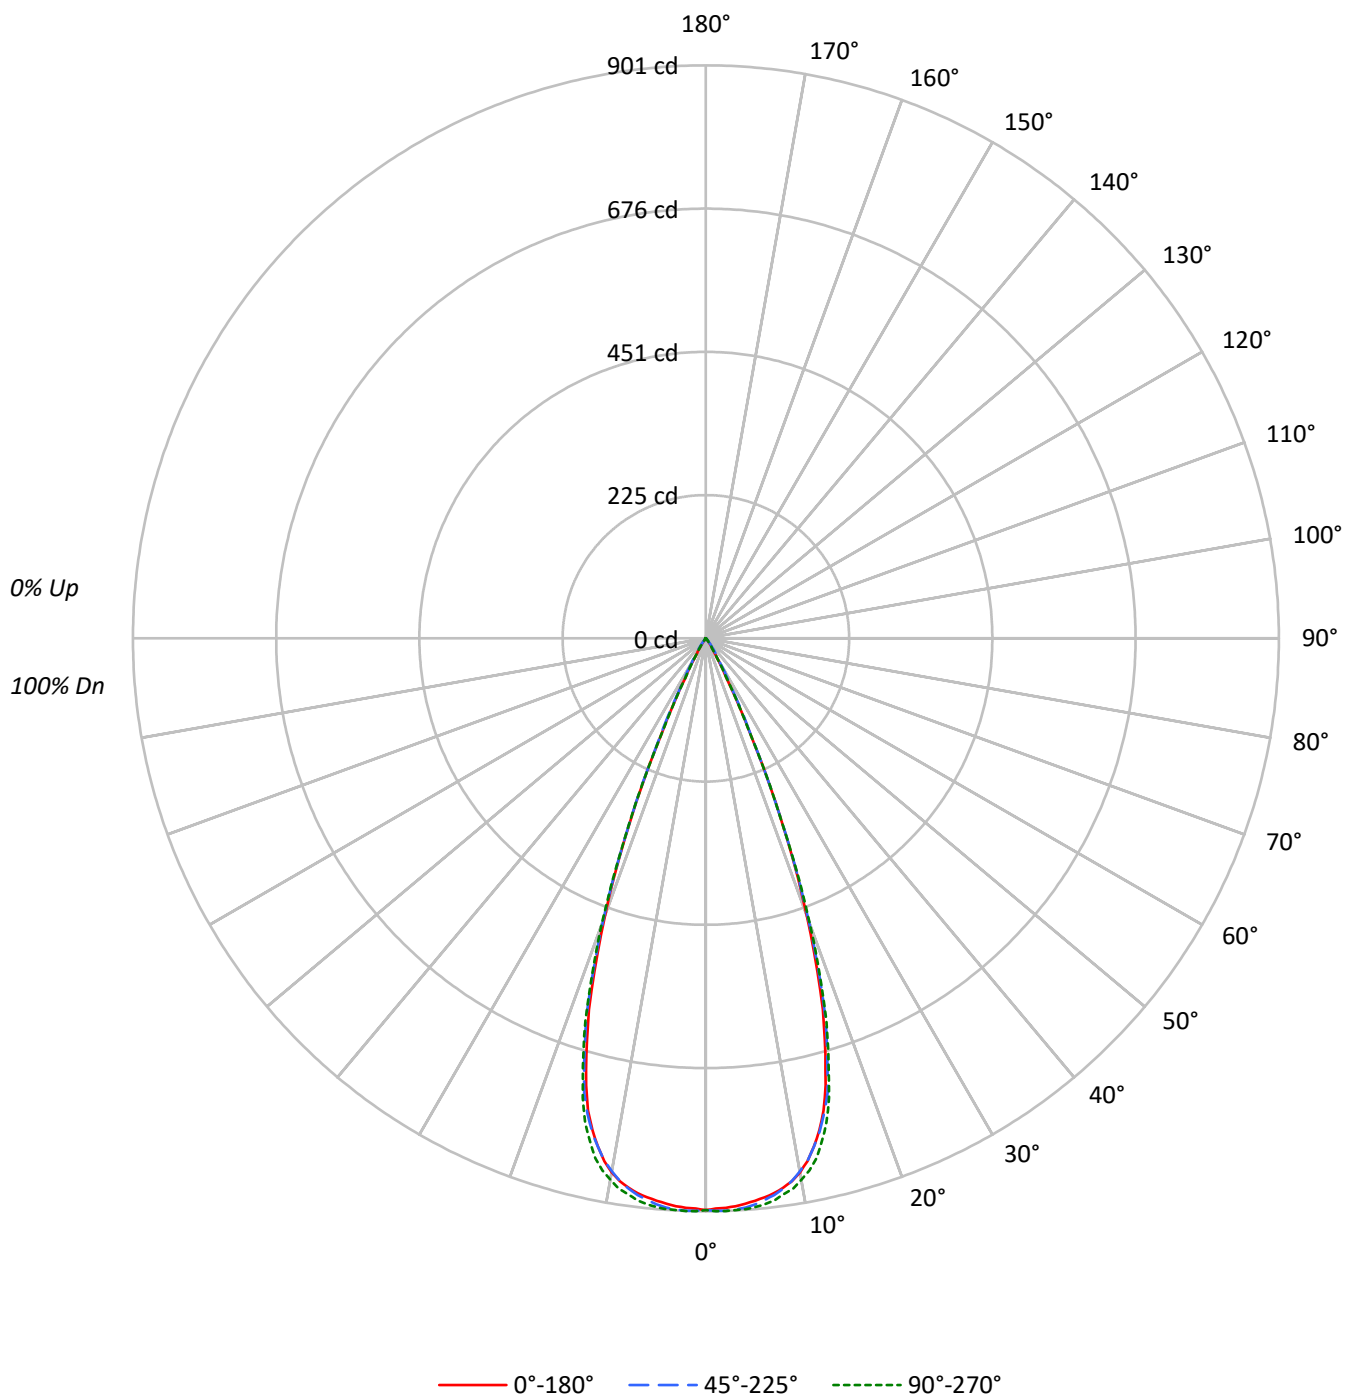

TEST NUMBER: P1310884

CATALOG NUMBER: P3SQAS02R409050DE010 E3SQCD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99	99	98	96
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97	95	94	92
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94	92	90	89
4	103	97	93	90	102	96	92	89	94	91	88		92	90	87		91	88	87	85
5	100	93	89	86	98	93	88	85	91	87	85		89	86	84		88	85	83	82
6	96	90	85	82	95	89	85	82	88	84	81		86	83	81		85	82	80	79
7	93	86	82	79	92	86	81	78	85	81	78		83	80	78		82	80	77	76
8	90	83	79	76	89	83	78	75	82	78	75		81	77	75		80	77	75	73
9	87	80	76	73	86	80	75	73	79	75	72		78	75	72		77	74	72	71
10	85	77	73	70	84	77	73	70	76	72	70		76	72	70		75	72	70	69

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	154811	154811	154811
5°	153466	154434	155178
10°	149102	148822	151148
15°	129712	131798	133403
20°	85131	86781	87917
25°	30347	32115	30195
30°	6622	8949	6662
35°	2123	3700	2060
40°	652	1147	607
45°	73	390	73
50°	0	80	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 390 cd/sqm

TEST NUMBER: P1310884

CATALOG NUMBER: P3SQAS02R409050DE010 E3SQCD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.1	22.2
10°-20°	195.8	51.8
20°-30°	87.8	23.2
30°-40°	9.5	2.5
40°-50°	0.9	0.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	367.6	97.3
0°-40°	377.1	99.8
0°-60°	378.0	100.0
0°-90°	378.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	378.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	899	899	899	899	899	
5°	888	890	893	895	898	84
15°	728	733	739	743	748	193
25°	160	164	169	172	159	85
35°	10	12	18	11	10	8
45°	0	0	2	0	0	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1310884

CATALOG NUMBER: P3SQAS02R409050DE010 E3SQCD1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	898.9	898.9	898.9	898.9	898.9
1°	897.0	898.9	900.5	899.2	901.0
2°	896.2	898.4	900.8	899.4	901.0
3°	894.1	896.8	899.4	898.6	900.2
4°	891.2	893.3	897.3	897.3	899.7
5°	887.7	890.1	893.3	894.6	897.6
6°	884.0	885.3	887.7	890.4	894.4
7°	879.2	879.2	882.1	884.8	890.1
8°	872.5	872.0	874.1	877.6	882.4
9°	864.3	862.4	864.0	869.1	876.3
10°	852.6	851.0	851.0	857.4	864.3
11°	837.4	836.9	837.1	843.3	852.6
12°	816.9	817.4	817.4	824.4	835.8
13°	793.8	793.5	795.9	803.6	811.3
14°	765.5	767.1	769.5	776.5	784.4
15°	727.5	732.8	739.2	743.4	748.2
17.5°	611.7	617.0	625.8	629.3	630.3
20°	464.5	472.2	473.5	480.5	479.7
22.5°	311.4	310.9	312.0	312.8	313.0
25°	159.7	164.5	169.0	172.0	158.9
27.5°	69.5	77.7	83.6	75.9	70.3
30°	33.3	37.8	45.0	38.1	33.5
32.5°	18.1	21.0	28.5	20.8	17.8
35°	10.1	11.7	17.6	11.4	9.8
37.5°	5.9	6.4	9.6	6.4	5.6
40°	2.9	3.7	5.1	3.7	2.7
42.5°	1.1	1.9	2.7	1.9	1.1
45°	0.3	0.5	1.6	0.5	0.3
47.5°	0.0	0.0	0.8	0.0	0.0
50°	0.0	0.0	0.3	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1310884

CATALOG NUMBER: P3SQAS02R409050DE010 E3SQCD1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)