

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1310894

Luminaire Tested: P3SQAS02R459050DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1310894
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS02R459050DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R45 optic, 5000K CCT AND, 90CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 358.0 lumens
Efficiency: N/A
Efficacy: 99.4 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.74 / 0.67
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1310894

CATALOG NUMBER: P3SQAS02R459050DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

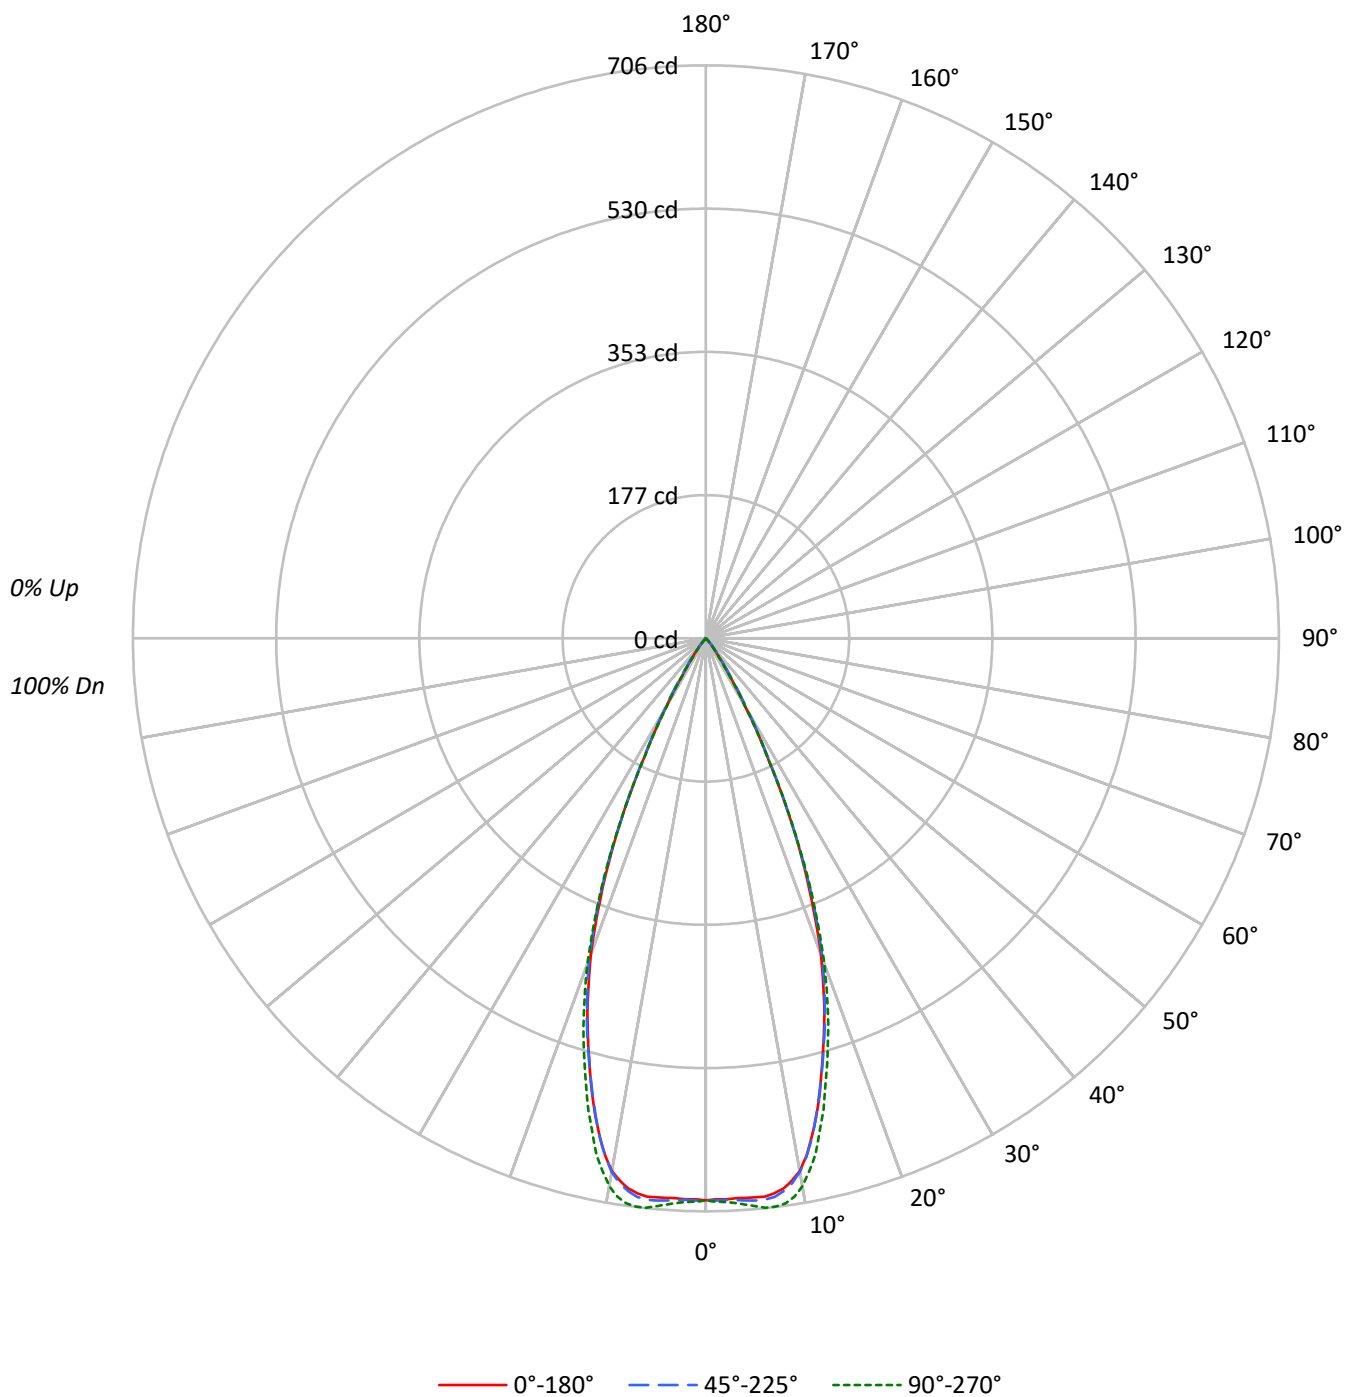

TEST NUMBER: P1310894

CATALOG NUMBER: P3SQAS02R459050DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	103	100	108	104	101	99	101	99	96		98	96	94		95
3	106	100	96	93	104	99	95	92	97	93	91		94	92	89		92
4	102	95	91	87	100	94	90	87	92	89	86		90	87	85		89
5	98	91	86	83	96	90	86	82	88	85	82		87	83	81		85
6	94	87	82	78	93	86	81	78	85	81	78		83	80	77		82
7	91	83	78	75	89	82	78	74	81	77	74		80	76	74		79
8	87	79	75	71	86	79	74	71	78	74	71		77	73	70		76
9	84	76	71	68	83	76	71	68	75	71	68		74	70	68		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	119247	119247	119247
5°	119530	120221	121414
10°	116540	116767	119827
15°	98314	98367	101594
20°	75894	76957	78240
25°	47089	47127	47431
30°	19429	20642	19111
35°	6034	7380	5824
40°	1844	2563	1731
45°	122	974	122
50°	0	134	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 974 cd/sqm

TEST NUMBER: P1310894

CATALOG NUMBER: P3SQAS02R459050DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.9	18.4
10°-20°	153.2	42.8
20°-30°	112.4	31.4
30°-40°	24.2	6.7
40°-50°	2.3	0.6
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	331.5	92.6
0°-40°	355.7	99.4
0°-60°	358.0	100.0
0°-90°	358.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	358.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	692	692	692	692	692	
5°	691	693	695	700	702	65
15°	551	550	552	560	570	152
25°	248	247	248	248	250	111
35°	29	31	35	30	28	23
45°	0	2	4	2	0	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1310894

CATALOG NUMBER: P3SQAS02R459050DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	692.4	692.4	692.4	692.4	692.4
1°	691.1	692.7	692.7	693.8	694.3
2°	691.6	692.7	692.4	694.3	695.1
3°	690.8	692.7	693.2	695.4	696.7
4°	691.1	692.7	694.3	697.5	699.4
5°	691.4	693.2	695.4	700.2	702.3
6°	691.6	693.0	695.4	701.5	705.5
7°	689.0	690.8	693.5	701.2	705.5
8°	684.7	685.8	687.9	698.0	703.1
9°	676.7	676.5	679.7	690.8	696.7
10°	666.4	663.2	667.7	678.9	685.2
11°	649.6	646.1	650.1	662.1	668.2
12°	627.8	627.8	628.6	639.2	649.9
13°	604.6	602.0	603.6	615.5	623.0
14°	579.1	576.4	578.0	587.1	598.8
15°	551.4	550.3	551.7	560.4	569.8
17.5°	485.7	483.3	488.1	496.8	501.6
20°	414.1	418.1	419.9	425.5	426.9
22.5°	331.8	336.1	338.8	339.6	340.4
25°	247.8	247.0	248.0	248.0	249.6
27.5°	162.9	162.9	165.8	163.9	162.1
30°	97.7	101.7	103.8	100.3	96.1
32.5°	53.2	57.2	60.7	55.6	51.9
35°	28.7	30.9	35.1	30.1	27.7
37.5°	15.7	17.6	20.2	17.0	15.7
40°	8.2	10.1	11.4	10.1	7.7
42.5°	2.7	5.1	6.7	5.1	2.4
45°	0.5	1.6	4.0	1.6	0.5
47.5°	0.0	0.3	1.9	0.3	0.0
50°	0.0	0.0	0.5	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1310894

CATALOG NUMBER: P3SQAS02R459050DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)