

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1311496

Luminaire Tested: P3SQAS17R359050DE010 E3SQCD1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1311496
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-25)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS17R359050DE010 E3SQCD1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 5000K CCT AND, 90CRI , E3SQCD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1776.0 lumens
Efficiency: N/A
Efficacy: 83.8 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.58 / 0.52
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1311496

CATALOG NUMBER: P3SQAS17R359050DE010 E3SQCD1MMS

Luminous Intensity Polar Plot

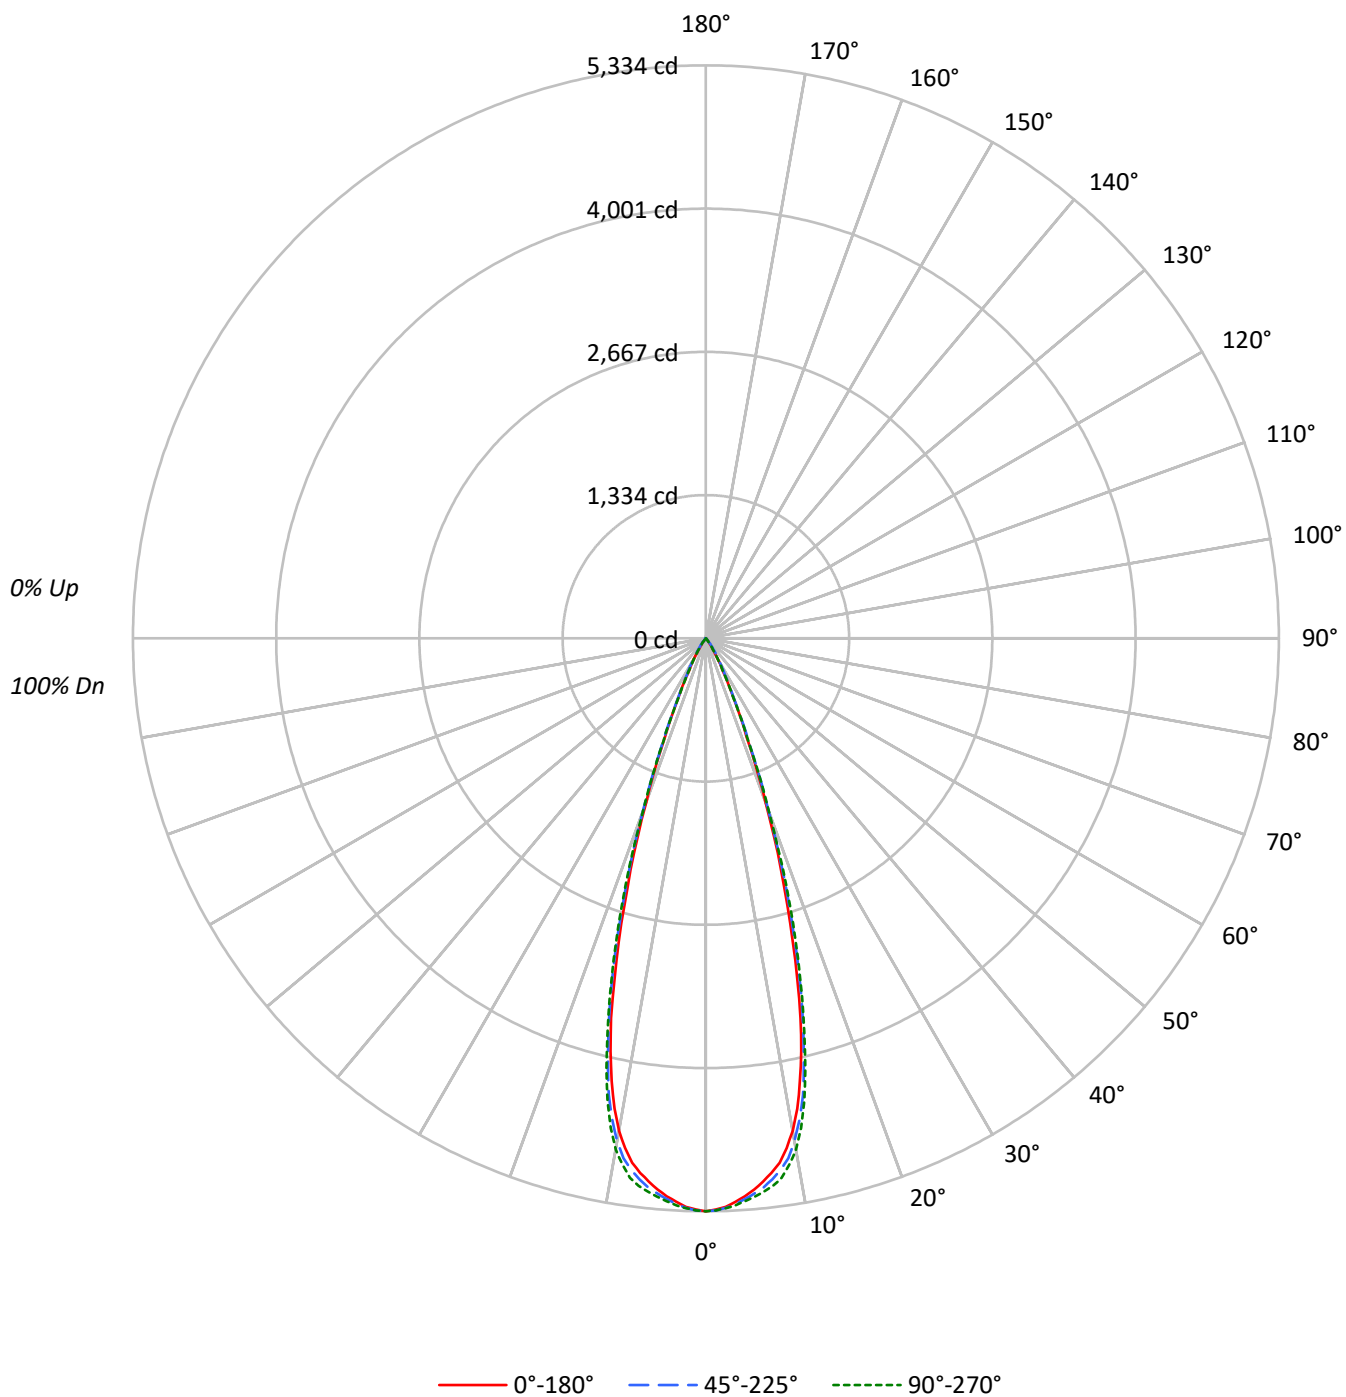

TEST NUMBER: P1311496

CATALOG NUMBER: P3SQAS17R359050DE010 E3SQCD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	113	111	109	107	107	105	104		103	102	101		100
2	111	107	104	102	109	106	103	100	102	100	98		100	98	96		97
3	107	102	99	96	105	101	98	95	99	96	94		96	94	92		94
4	104	98	94	91	102	97	93	90	95	92	89		93	91	88		92
5	100	94	90	87	99	93	90	87	92	88	86		90	87	85		89
6	97	91	86	83	96	90	86	83	89	85	83		88	84	82		86
7	94	88	83	80	93	87	83	80	86	82	80		85	82	79		84
8	91	85	80	77	91	84	80	77	83	80	77		82	79	77		81
9	89	82	78	75	88	81	77	75	81	77	74		80	77	74		79
10	86	79	75	72	85	79	75	72	78	75	72		78	74	72		77

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	918653	918653	918653
5°	890784	897112	901969
10°	814011	831220	845490
15°	585388	610956	615984
20°	298024	312980	313749
25°	113066	115479	112268
30°	43910	50910	42796
35°	15075	23653	14192
40°	5058	9173	4744
45°	341	3093	341
50°	0	375	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 3093 cd/sqm

TEST NUMBER: P1311496

CATALOG NUMBER: P3SQAS17R359050DE010 E3SQCD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	482.9	27.2
10°-20°	899.6	50.7
20°-30°	323.4	18.2
30°-40°	63.1	3.6
40°-50°	7.0	0.4
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1705.8	96.0
0°-40°	1768.9	99.6
0°-60°	1776.0	100.0
0°-90°	1776.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1776.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5334	5334	5334	5334	5334	
5°	5153	5167	5189	5213	5217	477
15°	3283	3338	3427	3451	3455	872
25°	595	601	608	604	591	312
35°	72	82	112	83	68	53
45°	1	4	13	4	1	4
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1311496

CATALOG NUMBER: P3SQAS17R359050DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5334.1	5334.1	5334.1	5334.1	5334.1
1°	5318.6	5325.7	5327.1	5336.9	5325.7
2°	5296.1	5300.3	5306.0	5314.4	5308.8
3°	5252.5	5260.9	5273.6	5284.9	5284.9
4°	5206.1	5217.3	5232.8	5252.5	5251.1
5°	5152.6	5166.7	5189.2	5213.1	5217.3
6°	5085.1	5102.0	5138.6	5172.3	5178.0
7°	5013.4	5038.7	5073.9	5123.1	5135.8
8°	4929.0	4948.7	4999.3	5057.0	5071.0
9°	4805.2	4834.7	4899.4	4952.9	4961.3
10°	4654.7	4675.8	4753.1	4809.4	4834.7
11°	4460.6	4491.5	4567.5	4625.1	4642.0
12°	4213.0	4258.0	4346.6	4388.8	4402.9
13°	3945.7	3983.7	4052.6	4104.7	4115.9
14°	3644.7	3681.3	3753.0	3795.2	3785.3
15°	3283.2	3338.0	3426.6	3450.6	3454.8
17.5°	2425.1	2460.3	2539.0	2577.0	2603.7
20°	1626.1	1659.9	1707.7	1733.0	1711.9
22.5°	988.9	1017.0	1042.3	1040.9	1033.9
25°	595.0	600.6	607.7	603.5	590.8
27.5°	347.4	362.9	384.0	370.0	348.9
30°	220.8	233.5	256.0	232.1	215.2
32.5°	116.8	147.7	171.6	139.3	122.4
35°	71.7	81.6	112.5	83.0	67.5
37.5°	43.6	50.6	70.3	49.2	39.4
40°	22.5	32.4	40.8	29.5	21.1
42.5°	7.0	15.5	22.5	14.1	7.0
45°	1.4	4.2	12.7	4.2	1.4
47.5°	0.0	0.0	5.6	1.4	0.0
50°	0.0	0.0	1.4	0.0	0.0
52.5°	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1311496

CATALOG NUMBER: P3SQAS17R359050DE010 E3SQCD1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)