

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1313149

Luminaire Tested: P3SQAS05R559730DE010 E3SQCD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1313149
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R559730DE010 E3SQCD1MW
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 97CRI , E3SQCD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 589.9 lumens
Efficiency: N/A
Efficacy: 81.9 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1313149

CATALOG NUMBER: P3SQAS05R559730DE010 E3SQCD1MW

Luminous Intensity Polar Plot

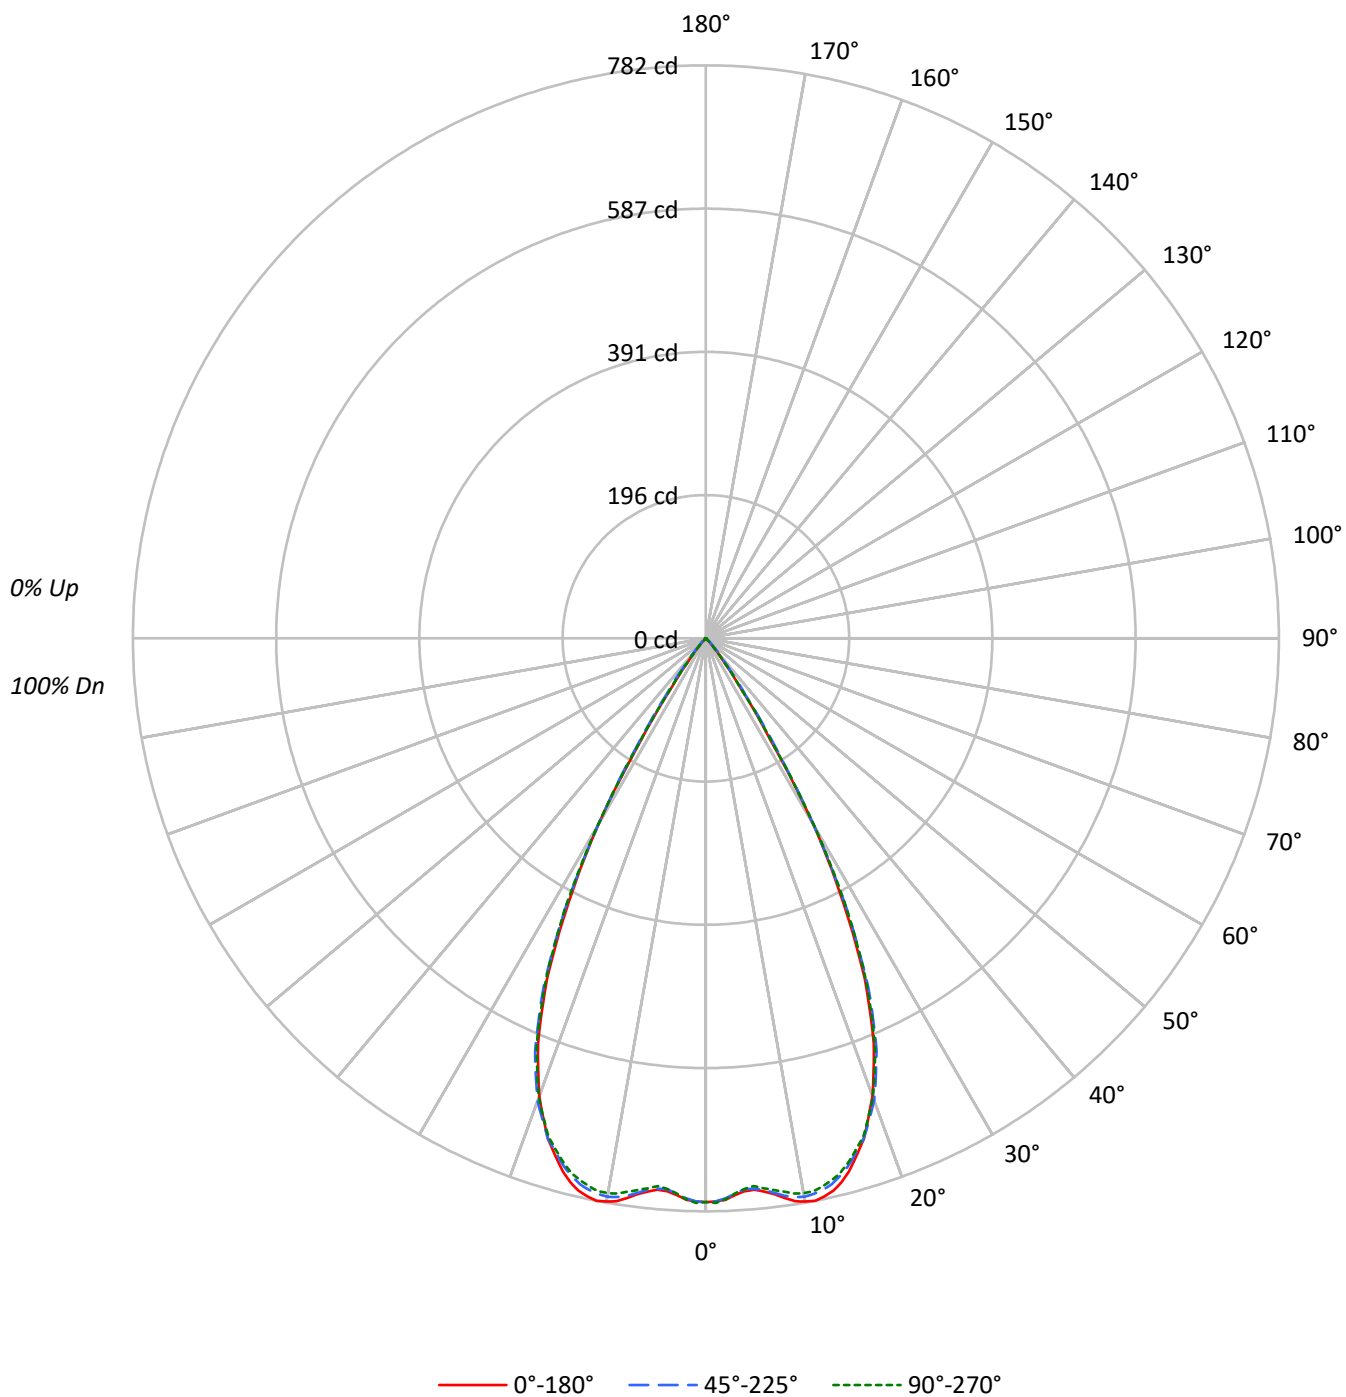

TEST NUMBER: P1313149

CATALOG NUMBER: P3SQAS05R559730DE010 E3SQCD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	98	94	90	102	97	93	90	94	91	88		92	89	87		90
4	100	93	88	84	98	92	87	84	90	86	83		88	84	82		86
5	95	88	82	79	94	87	82	78	85	81	78		83	80	77		82
6	91	83	78	74	90	82	77	74	81	76	73		80	76	73		78
7	87	79	73	70	86	78	73	69	77	72	69		76	72	69		75
8	83	75	69	66	82	74	69	66	73	69	65		72	68	65		71
9	80	71	66	62	79	71	66	62	70	65	62		69	65	62		68
10	77	68	62	59	76	67	62	59	67	62	59		66	62	59		65

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	132508	132508	132508
5°	130611	130369	129747
10°	136511	135339	134465
15°	134383	133171	132618
20°	121842	123088	122171
25°	97446	99479	98548
30°	58427	58427	59143
35°	16883	19994	17450
40°	4834	6565	4834
45°	1096	2509	1096
50°	482	831	348
55°	390	390	390
60°	448	448	448
65°	367	367	367
70°	453	453	453
75°	266	266	266
80°	397	397	397
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 2509 cd/sqm

TEST NUMBER: P1313149

CATALOG NUMBER: P3SQAS05R559730DE010 E3SQCD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.9	12.4
10°-20°	207.9	35.2
20°-30°	229.1	38.8
30°-40°	70.1	11.9
40°-50°	6.9	1.2
50°-60°	1.2	0.2
60°-70°	1.0	0.2
70°-80°	0.5	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	509.9	86.4
0°-40°	580.0	98.3
0°-60°	588.2	99.7
0°-90°	589.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	589.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	756	756	754	752	750	73
15°	754	752	747	744	744	209
25°	513	518	524	528	519	226
35°	80	84	95	88	83	66
45°	4	7	10	7	4	5
55°	1	1	1	1	1	1
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1313149

CATALOG NUMBER: P3SQAS05R559730DE010 E3SQCD1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	769.4	769.4	769.4	769.4	769.4
1°	768.5	768.9	768.5	767.6	770.7
2°	766.7	766.2	764.9	764.4	765.8
3°	760.9	760.9	759.1	758.2	758.6
4°	756.4	756.4	753.7	752.8	753.2
5°	755.5	755.5	754.1	751.9	750.5
6°	759.1	760.0	756.8	754.6	754.6
7°	764.4	764.9	762.6	759.5	758.6
8°	771.2	771.6	768.0	764.4	762.6
9°	777.9	777.0	772.1	768.5	767.1
10°	780.6	780.1	773.9	770.3	768.9
11°	781.9	779.7	772.5	769.4	768.9
12°	778.8	777.0	769.4	766.2	764.9
13°	773.4	770.7	764.4	761.3	759.5
14°	764.9	762.2	756.4	752.8	753.2
15°	753.7	752.3	746.9	743.8	743.8
17.5°	716.4	717.3	716.0	714.6	713.7
20°	664.8	668.4	671.6	669.8	666.6
22.5°	598.9	605.2	608.8	609.7	603.8
25°	512.8	517.7	523.5	528.5	518.6
27.5°	405.5	410.0	415.4	418.6	417.2
30°	293.8	294.3	293.8	299.7	297.4
32.5°	163.3	176.8	179.0	183.0	168.7
35°	80.3	84.3	95.1	87.5	83.0
37.5°	38.6	41.3	51.6	42.2	40.4
40°	21.5	23.3	29.2	24.2	21.5
42.5°	10.3	13.5	15.7	13.9	10.3
45°	4.5	6.7	10.3	6.7	4.5
47.5°	1.8	2.7	6.3	2.7	1.8
50°	1.8	1.3	3.1	1.3	1.3
52.5°	1.3	1.3	1.8	1.3	1.3
55°	1.3	1.3	1.3	1.3	1.3
57.5°	1.3	1.3	1.3	1.3	1.3
60°	1.3	1.3	1.3	1.3	1.3
62.5°	0.9	1.3	1.3	1.3	0.9
65°	0.9	0.9	0.9	0.9	0.9
67.5°	0.9	0.9	0.9	0.9	0.9
70°	0.9	0.9	0.9	0.9	0.9
72.5°	0.4	0.9	0.4	0.4	0.4
75°	0.4	0.4	0.4	0.4	0.4
77.5°	0.4	0.4	0.4	0.4	0.4
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1313149
CATALOG NUMBER: P3SQAS05R559730DE010 E3SQCD1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)