

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1313246

Luminaire Tested: P3SQAS09R309730DE010 E3SQPH1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1313246
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS09R309730DE010 E3SQPH1MB
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 97CRI , E3SQPH1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 761.0 lumens
Efficiency: N/A
Efficacy: 68.6 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1313246

CATALOG NUMBER: P3SQAS09R309730DE010 E3SQPH1MB

Luminous Intensity Polar Plot

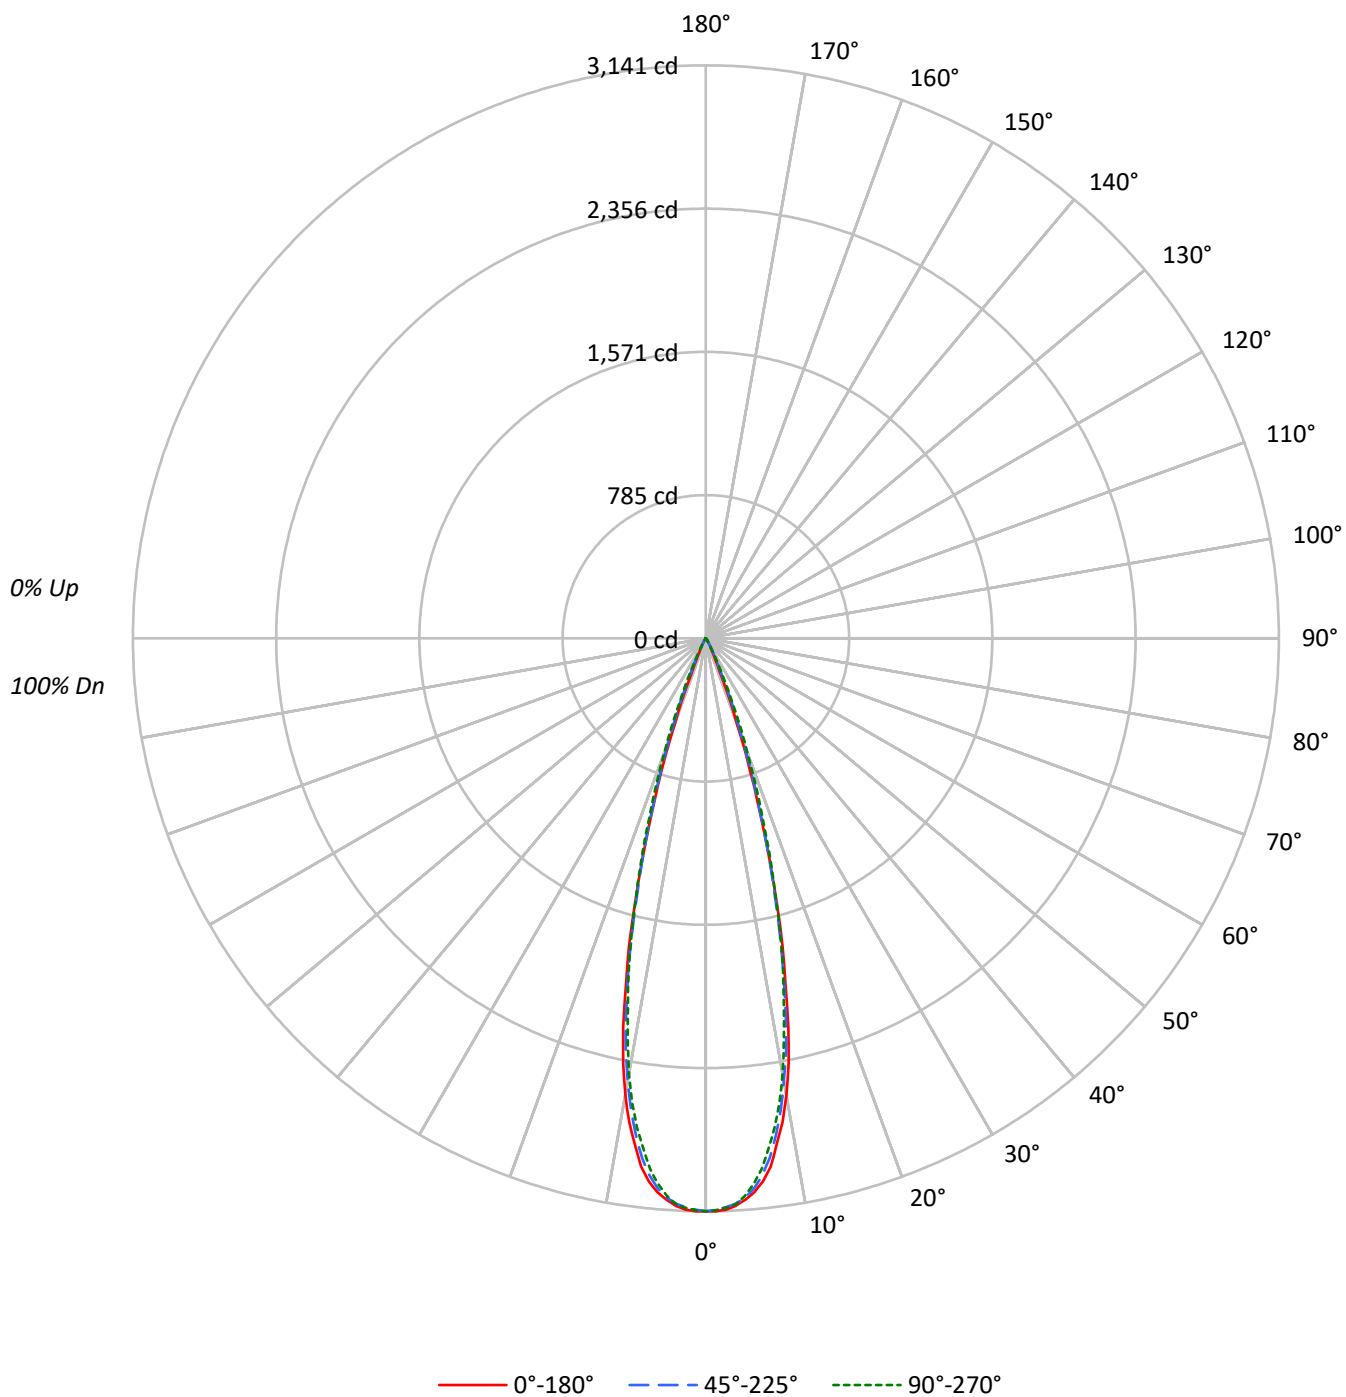

TEST NUMBER: P1313246

CATALOG NUMBER: P3SQAS09R309730DE010 E3SQPH1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	540900	540900	540900
5°	526974	523344	519022
10°	444718	431060	424065
15°	268000	260511	265307
20°	90905	104980	121090
25°	16703	26186	30917
30°	5747	6384	7179
35°	1661	2060	2208
40°	450	742	585
45°	170	170	170
50°	188	0	188
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 198 cd/sqm

TEST NUMBER: P1313246

CATALOG NUMBER: P3SQAS09R309730DE010 E3SQPH1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	271.6	35.7
10°-20°	396.9	52.2
20°-30°	84.0	11.0
30°-40°	7.7	1.0
40°-50°	0.8	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	752.5	98.9
0°-40°	760.2	99.9
0°-60°	761.0	100.0
0°-90°	761.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	761.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3141	3141	3141	3141	3141	
5°	3048	3042	3027	3018	3002	275
15°	1503	1498	1461	1495	1488	396
25°	88	98	138	162	163	64
35°	8	10	10	12	10	7
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0

TEST NUMBER: P1313246

CATALOG NUMBER: P3SQAS09R309730DE010 E3SQPH1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3140.7	3140.7	3140.7	3140.7	3140.7
1°	3141.3	3138.1	3133.5	3140.0	3135.4
2°	3134.8	3126.9	3120.3	3126.9	3124.9
3°	3115.1	3108.5	3103.9	3107.2	3107.2
4°	3085.6	3078.3	3074.4	3075.1	3065.2
5°	3048.2	3042.3	3027.2	3018.0	3002.2
6°	2993.1	2978.6	2960.3	2945.2	2924.8
7°	2918.3	2896.0	2869.7	2843.5	2817.9
8°	2798.2	2787.7	2752.3	2734.6	2709.0
9°	2685.4	2659.8	2621.7	2592.8	2579.1
10°	2543.0	2504.9	2464.9	2441.9	2424.9
11°	2374.4	2335.7	2303.5	2270.1	2243.8
12°	2176.2	2143.4	2106.7	2084.4	2053.5
13°	1941.4	1936.8	1895.4	1888.2	1884.3
14°	1739.9	1721.6	1680.9	1692.0	1694.7
15°	1503.1	1497.8	1461.1	1495.2	1488.0
17.5°	941.5	943.4	966.4	1020.2	1037.3
20°	496.0	511.1	572.8	637.7	660.7
22.5°	200.8	234.2	297.2	341.2	370.7
25°	87.9	98.4	137.8	162.1	162.7
27.5°	49.9	50.5	66.3	68.9	70.2
30°	28.9	29.5	32.1	34.1	36.1
32.5°	15.7	17.1	17.7	20.3	20.3
35°	7.9	9.8	9.8	11.8	10.5
37.5°	4.6	5.2	5.9	5.9	5.2
40°	2.0	2.6	3.3	3.3	2.6
42.5°	0.7	1.3	1.3	1.3	2.0
45°	0.7	0.7	0.7	0.7	0.7
47.5°	0.7	0.7	0.0	0.7	0.7
50°	0.7	0.0	0.0	0.0	0.7
52.5°	0.7	0.0	0.0	0.0	0.7
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1313246
CATALOG NUMBER: P3SQAS09R309730DE010 E3SQPH1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)