

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1314062

Luminaire Tested: P3SQAS05R309735DE010 E3SQPH1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314062
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R309735DE010 E3SQPH1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 97CRI , E3SQPH1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 541.0 lumens
Efficiency: N/A
Efficacy: 75.1 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314062

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPH1MMS

Luminous Intensity Polar Plot

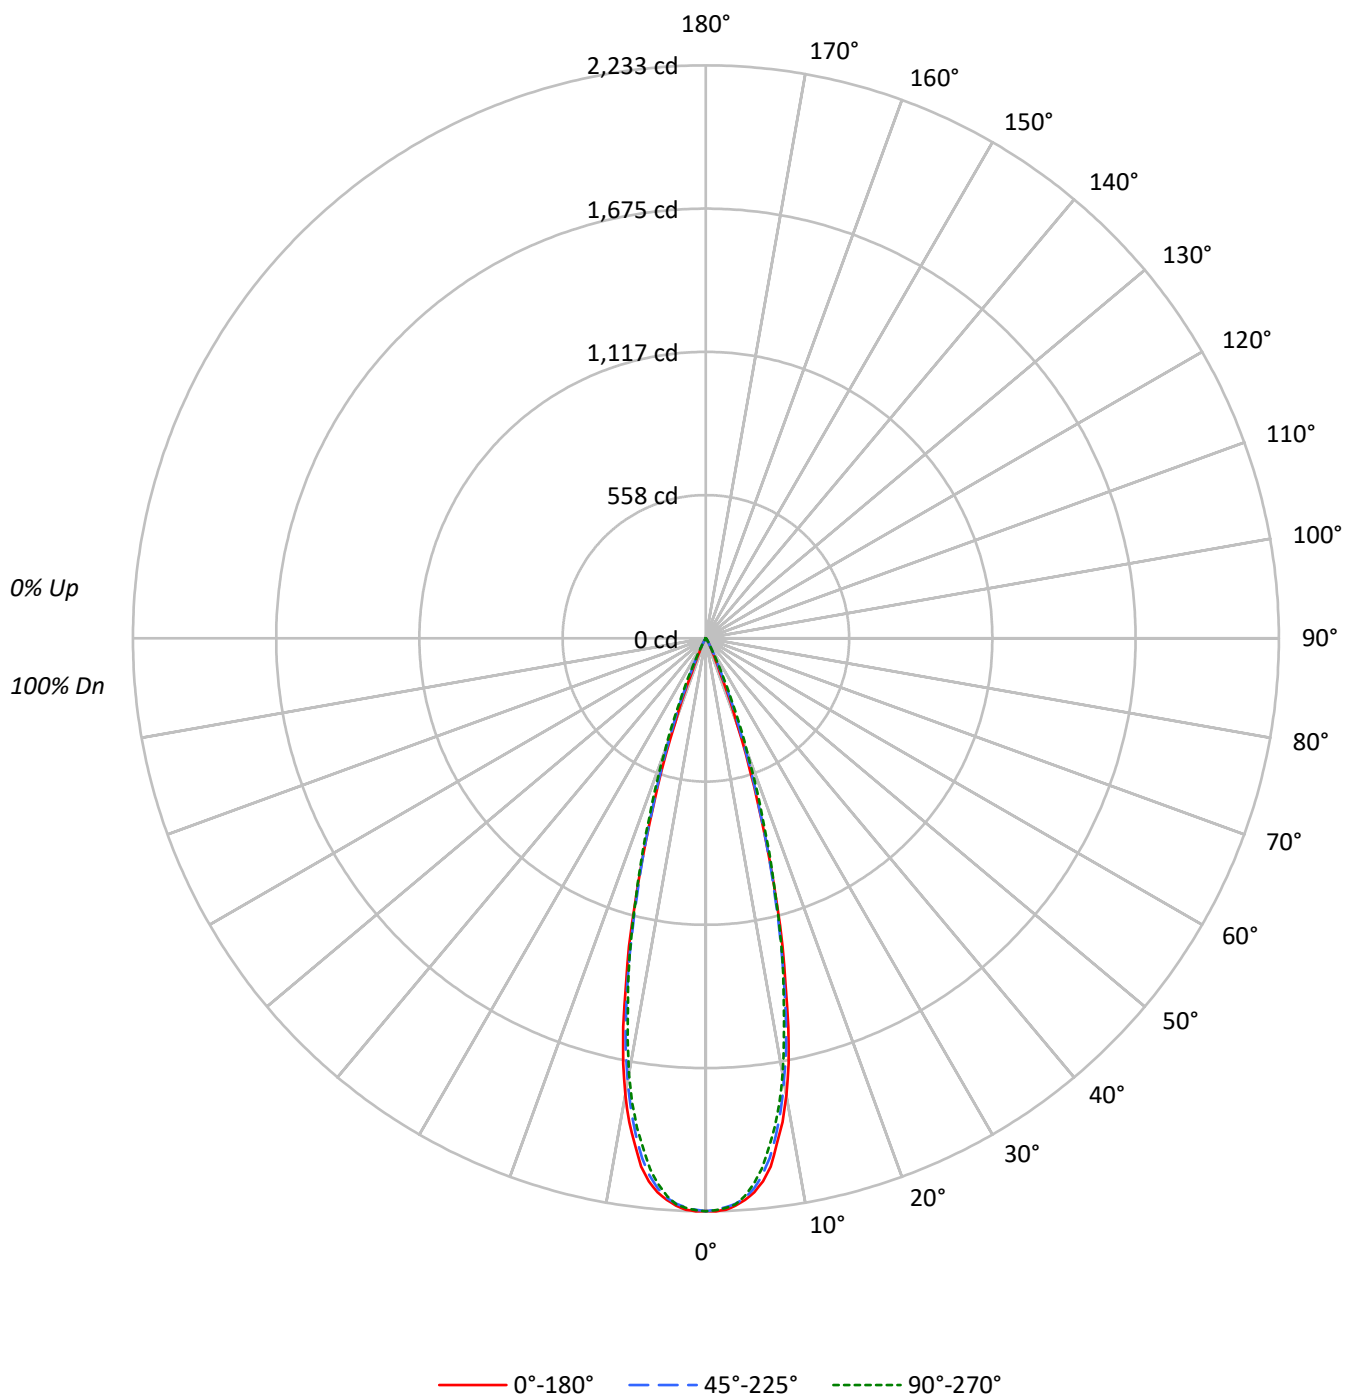

TEST NUMBER: P1314062

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPH1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	384521	384521	384521
5°	374632	372039	368979
10°	316147	306441	301475
15°	190529	185198	188604
20°	64623	74630	86085
25°	11877	18604	21986
30°	4077	4554	5111
35°	1177	1472	1577
40°	315	517	427
45°	122	122	122
50°	134	0	134
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 141 cd/sqm

TEST NUMBER: P1314062

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPH1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.1	35.7
10°-20°	282.2	52.2
20°-30°	59.7	11.0
30°-40°	5.5	1.0
40°-50°	0.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	534.9	98.9
0°-40°	540.4	99.9
0°-60°	541.0	100.0
0°-90°	541.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	541.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2233	2233	2233	2233	2233	
5°	2167	2163	2152	2146	2134	196
15°	1069	1065	1039	1063	1058	282
25°	62	70	98	115	116	46
35°	6	7	7	8	8	5
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1314062

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2232.7	2232.7	2232.7	2232.7	2232.7
1°	2233.2	2230.9	2227.6	2232.3	2229.0
2°	2228.5	2222.9	2218.3	2222.9	2221.5
3°	2214.5	2209.9	2206.6	2208.9	2208.9
4°	2193.5	2188.4	2185.6	2186.1	2179.1
5°	2167.0	2162.8	2152.0	2145.5	2134.3
6°	2127.8	2117.5	2104.5	2093.7	2079.3
7°	2074.6	2058.8	2040.1	2021.4	2003.3
8°	1989.3	1981.8	1956.6	1944.0	1925.8
9°	1909.0	1890.8	1863.8	1843.3	1833.5
10°	1807.8	1780.8	1752.3	1736.0	1723.9
11°	1688.0	1660.4	1637.6	1613.8	1595.1
12°	1547.1	1523.8	1497.7	1481.8	1459.9
13°	1380.1	1376.9	1347.5	1342.3	1339.5
14°	1236.9	1223.9	1195.0	1202.9	1204.8
15°	1068.6	1064.8	1038.7	1063.0	1057.8
17.5°	669.3	670.7	687.0	725.3	737.4
20°	352.6	363.3	407.2	453.4	469.7
22.5°	142.7	166.5	211.3	242.5	263.5
25°	62.5	70.0	97.9	115.2	115.7
27.5°	35.4	35.9	47.1	49.0	49.9
30°	20.5	21.0	22.9	24.3	25.7
32.5°	11.2	12.1	12.6	14.5	14.5
35°	5.6	7.0	7.0	8.4	7.5
37.5°	3.3	3.7	4.2	4.2	3.7
40°	1.4	1.9	2.3	2.3	1.9
42.5°	0.5	0.9	0.9	0.9	1.4
45°	0.5	0.5	0.5	0.5	0.5
47.5°	0.5	0.5	0.0	0.5	0.5
50°	0.5	0.0	0.0	0.0	0.5
52.5°	0.5	0.0	0.0	0.0	0.5
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1314062

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPH1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)