

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1314068

Luminaire Tested: P3SQAS05R309735DE010 E3SQPHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314068
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3SQAS05R309735DE010 E3SQPHLP1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 97CRI , E3SQPHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 305.0 lumens
Efficiency: N/A
Efficacy: 42.4 lumens/watt
Spacing Criteria (0/90/45): 0.67 / 0.66 / 0.7
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314068

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPHLP1MW

Luminous Intensity Polar Plot

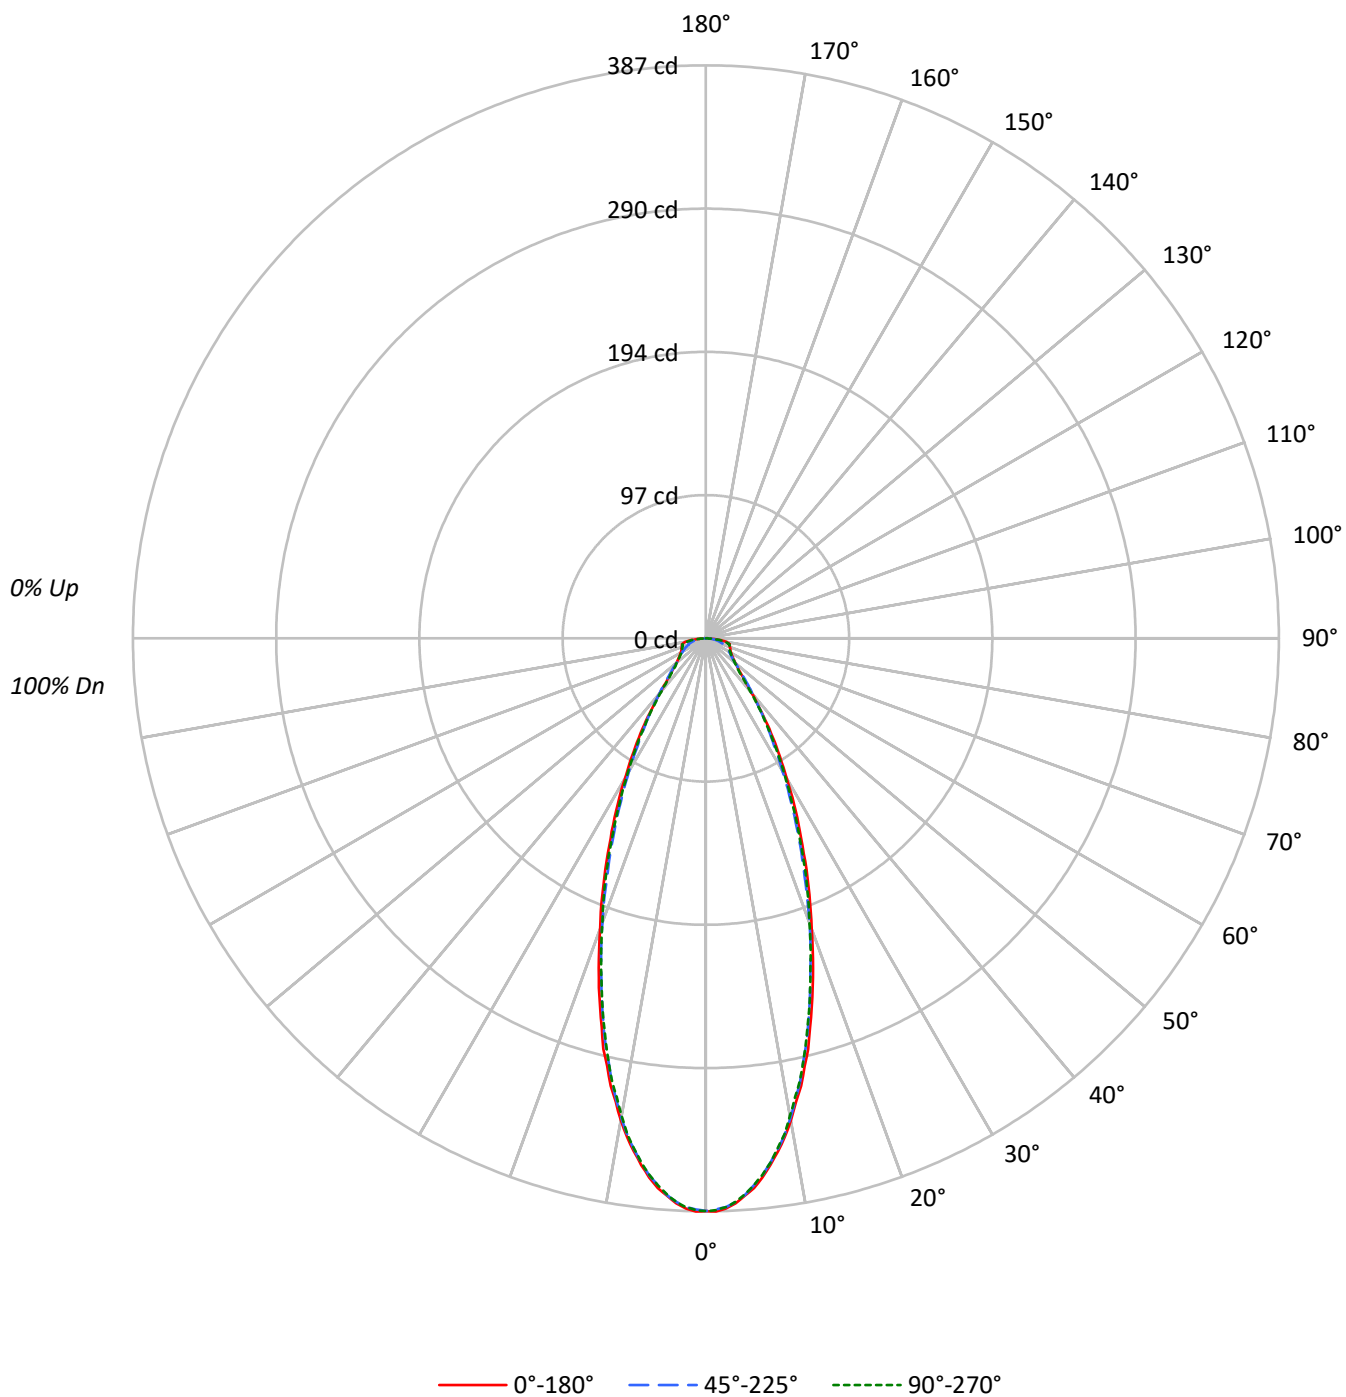

TEST NUMBER: P1314068

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	107	104	101	109	105	102	99	101	99	96		97	95	93		94
2	104	98	92	88	102	96	91	87	92	88	85		89	86	83		86
3	97	89	83	78	95	88	82	77	85	80	76		83	78	75		80
4	92	82	76	70	90	81	75	70	79	73	69		77	72	68		75
5	86	76	69	64	85	75	69	64	74	68	63		72	67	63		70
6	82	71	64	59	80	70	64	59	69	63	59		67	62	58		66
7	77	67	60	55	76	66	60	55	65	59	55		63	58	54		62
8	74	63	56	51	72	62	56	51	61	55	51		60	55	51		59
9	70	59	53	48	69	59	52	48	58	52	48		57	51	48		56
10	67	56	50	45	66	56	49	45	55	49	45		54	49	45		53

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	66616	66616	66616
5°	64450	64121	64121
10°	57833	57500	57256
15°	48479	47730	47641
20°	38268	37498	37498
25°	29283	28143	28675
30°	21736	20622	21080
35°	15705	15033	15117
40°	10814	11016	10499
45°	8086	8427	7745
50°	7020	6886	6886
55°	6606	6305	6456
60°	6751	6269	6613
65°	7417	6276	7254
70°	8711	6345	8460
75°	11179	6854	10846
80°	13885	7438	12992
85°	11066	7311	10078

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 13885 cd/sqm

TEST NUMBER: P1314068

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.1	11.2
10°-20°	74.2	24.3
20°-30°	69.1	22.7
30°-40°	45.8	15.0
40°-50°	26.7	8.8
50°-60°	19.4	6.4
60°-70°	16.4	5.4
70°-80°	13.6	4.5
80°-90°	5.6	1.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	177.4	58.2
0°-40°	223.2	73.2
0°-60°	269.3	88.3
0°-90°	305.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	305.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	387	387	387	387	387	
5°	373	372	371	371	371	34
15°	272	269	268	267	267	75
25°	154	151	148	148	151	71
35°	75	73	72	72	72	47
45°	33	34	35	33	32	27
55°	22	22	21	22	22	20
65°	18	16	15	16	18	18
75°	17	13	10	13	16	17
85°	6	6	4	6	5	6
90°	0	0	0	0	0	

TEST NUMBER: P1314068

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	386.8	386.8	386.8	386.8	386.8
1°	387.2	386.8	385.8	386.3	386.3
2°	385.4	384.9	384.4	384.4	384.4
3°	382.1	381.6	381.2	381.2	381.2
4°	377.4	377.0	377.0	376.5	376.5
5°	372.8	372.3	370.9	370.9	370.9
6°	366.2	365.8	364.8	364.4	364.4
7°	358.3	358.3	356.9	356.4	356.9
8°	349.9	349.4	348.5	348.0	348.0
9°	341.0	339.6	339.6	338.2	339.1
10°	330.7	329.8	328.8	327.9	327.4
11°	319.0	318.6	317.2	316.2	315.8
12°	309.2	306.9	306.0	304.6	305.5
13°	296.6	295.2	292.9	292.4	292.9
14°	285.9	283.1	281.2	280.3	279.8
15°	271.9	269.1	267.7	267.2	267.2
17.5°	240.6	238.7	235.0	235.0	235.0
20°	208.8	206.9	204.6	204.1	204.6
22.5°	181.2	178.0	174.2	174.7	177.5
25°	154.1	151.3	148.1	148.5	150.9
27.5°	131.3	127.5	124.3	125.2	126.6
30°	109.3	107.0	103.7	104.6	106.0
32.5°	90.6	89.2	85.5	86.4	87.8
35°	74.7	73.3	71.5	71.9	71.9
37.5°	59.8	59.8	59.3	58.9	58.4
40°	48.1	49.0	49.0	47.6	46.7
42.5°	39.2	40.2	41.1	39.2	37.8
45°	33.2	33.6	34.6	32.7	31.8
47.5°	29.0	29.0	29.9	28.5	28.0
50°	26.2	26.2	25.7	25.2	25.7
52.5°	23.8	23.4	22.9	23.4	23.4
55°	22.0	21.5	21.0	21.5	21.5
57.5°	20.6	20.1	19.6	19.6	20.1
60°	19.6	18.7	18.2	18.7	19.2
62.5°	18.7	17.3	16.8	17.3	18.2
65°	18.2	16.3	15.4	16.3	17.8
67.5°	17.8	15.4	14.0	15.4	17.3
70°	17.3	14.5	12.6	14.5	16.8
72.5°	16.8	13.5	11.7	13.5	16.8
75°	16.8	12.6	10.3	12.6	16.3
77.5°	15.9	11.7	8.9	11.7	15.4
80°	14.0	10.7	7.5	10.3	13.1
82.5°	10.3	9.3	5.6	8.9	9.8
85°	5.6	6.5	3.7	6.1	5.1
87.5°	0.9	1.4	0.9	2.8	1.9



TEST NUMBER: P1314068

CATALOG NUMBER: P3SQAS05R309735DE010 E3SQPHLP1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)